

FOOT GROUNTERS

Foot Grouters Safely remove static charges from workers to protect your ESD susceptible products.

- 2 Per ANSI/ESD S20.20, use with ESD Floor "as a grounding alternative to the wrist strap system for standing operations"
- 2 All our Foot Grouters are a suitable ESD footwear component in your Flooring-Footwear System as the primary grounding method(3.5×10^7 ohms per ESD STM97.1)
- 2 Integral Current-Limiting Resistor for enhanced operator safety
- 2 Available with 1megohm, 1.5megohm, 2megohm resistors; OSHA recommends a minimum of 1 megohm resistance to ground (RTG)
- 2 Exceptionally long-lasting, durable premium rubber with tear resistant inner scrim and dual wear surface to double its life

Material Key:


- 2 0.070" thick, 1.5" width, three layer laminated, rubber sole. White Color inner layer is insulative styrene-butadiene-rubber. Outer black colored layer is conductive styrene-butadiene rubber.
- 2 Burgundy, grounding polyester ribbon tab, 18"/30" long with 8 conductive nylon strands, two-sided reversible, may be positioned on either side of foot.
- 2 A 1/4 watt, 1 meg ohm, 1.5megohm or 2megohm resistor are possible
- 2 No Silicone is used in the materials that make our foot grouters

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Foot Grouter Types:


Cup Style Grouter

Two soles for double life span.

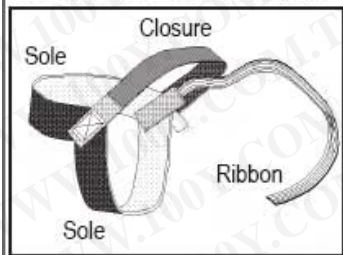


Standard Grouter

One sole and an elastic back strap.

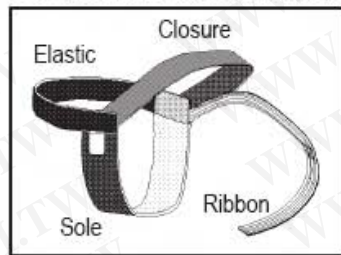


Toe Grouter

For high heel shoes.

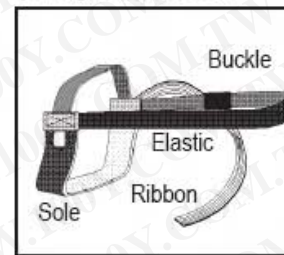

Sole Grouter- Full Coverage

The most floor contact area.

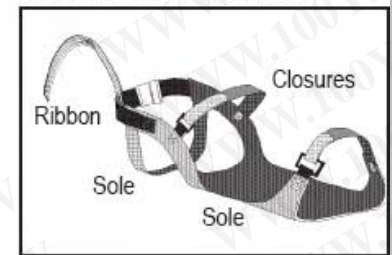

Closure Styles:

Hook and Loop



Hook and Elastic Loop



D-Ring



Quick Clasp



1. Heel Grouter – Cup Style (Two Soles for double life span)

HEEL GRUNDERS WITH ELASTICIZED ANKLE STRAP

Specifications:

Elastic Velcro provide a comfortable and secure fit

Resistor: 1 or 2 Megohm

Color: Black/White

Ribbon: 18"/30" long nylon/polyester grounding tab with 8 conductive strands

Elastic Velcro: 3/4" Black, Blue or Green

Sole Interior: Non-Marking

Sole Exterior: $<10^5$ ohms

Cross-Linked tire grade rubber

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)



ITEM

DESCRIPTION

FG101-1M-BK	Heel Grounder, cup style, black Hook and elastic Loop, 1meg resistor
FG101-2M-BK	Heel Grounder, cup style, black Hook and elastic Loop, 2meg resistor
FG101-1M-BL	Heel Grounder, cup style, blue Hook and elastic Loop, 1meg resistor
FG101-2M-BL	Heel Grounder, cup style, blue Hook and elastic Loop, 2meg resistor
FG101-1M-GR	Heel Grounder, cup style, green Hook and elastic Loop, 1meg resistor
FG101-2M-GR	Heel Grounder, cup style, green Hook and elastic Loop, 2meg resistor