
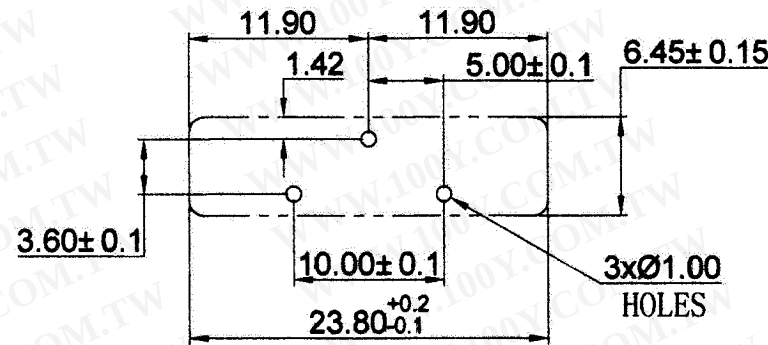
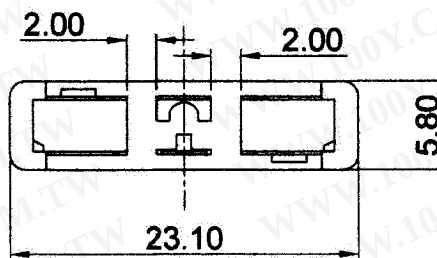
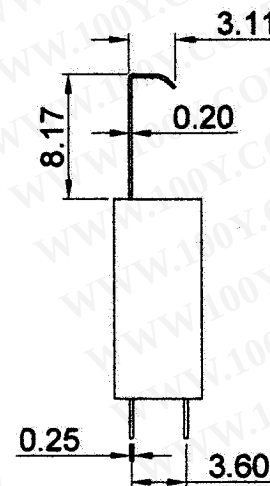


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

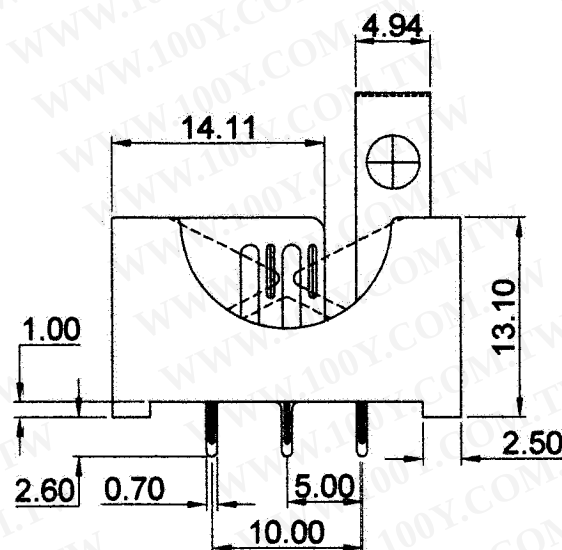

# NOTES:

## 1. MATERIAL:

HOUSING: PA66+30%GF UL94V0 BLACK COLOR  
 CONTACT: PHOSPHOR BRONZE 0.2MM THK  
 TIN PLATED OVER NICKEL

2. CURRENT RATING : 3A (AC/DC)

3. VOLTAGE RATING : 250V (AC/DC)

4. CONTACT RESISTANCE: 30 MILLIOHMS




5. INSULATION RESISTANCE: 1000 MEGAOHMS

6. TEMPERATURE RANGE: -55°C TO +85°C

7. HUMIDITY: 40°C AND 90-95% RH FOR 96 HOURS

8. RoHS COMPLIANT

PCB MOUNTING LAYOUT

| 3                                                                                                                                                                 |              |      |       |                                |       |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-------|--------------------------------|-------|---------------------------------------------------------------------------------------|
| 2                                                                                                                                                                 |              |      |       |                                |       |                                                                                       |
| 1                                                                                                                                                                 |              |      |       |                                |       |                                                                                       |
| NO.                                                                                                                                                               | MODIFICATION | DATE | NAME  | COIN CELL HOLDER: CH243-2032LF |       |                                                                                       |
|  General Tolerance<br>Dim: 0.0 ±0.30<br>0.00 ±0.20<br>Angle: ±3° 0.000 ±0.10 |              |      | SCALE | 2:1                            | APPD  |  |
|                                                                                                                                                                   |              |      | UNIT  | MM                             | CHKD  |  |
|                                                                                                                                                                   |              |      | MAT'L | AS NOTES                       | DWN   | HUHONGWEI                                                                             |
|                                                                                                                                                                   |              |      | DATE  | MAR. 25. 2008                  | DR NO | CH243-0308                                                                            |