

Features

- Wide 4 : 1 Input Voltage Range(9~36V,18~75V)
- High Efficiency up to 91%
- Remote On/Off
- Input / Output Isolation Voltage: 1.5kVDC
- Extended Operating Temperature Range: -40°C to+85°C
- Output Short Circuit Protection:
Hiccup, continuous & Auto Recovery
- Over Voltage Protection: Clamp Mode
- Shielded Metal Case with Insulated Baseplate
- Lead Free Design, RoHS Compliant
- 6 pin DIP Package with Industry-Standard Footprint
- Standard 1"X1" Package
- Customer Design Available



Description

The BRA20WHS Series are isolated 20W DC/DC converters. Designed with highly efficiency, allow the operating temperature range of these units to be -40°C to +85°C (with derating) in a 6 pin DIP package with industry-standard footprint. Further features include wide 4 : 1 input voltage range, remote on/off control, trimmable output, short-circuit protection and over voltage protection.

Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Technical Specification

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

Model Number	Input Voltage Range	Output Voltage (V)	Output Current (mA)		Input Current (mA)		Eff. ⁽²⁾ (%)	Capacitive Load, max. ⁽³⁾ (uF)
			Min. Load ⁽¹⁾	Full. Load	No Load	Full Load		
BRA20-24S0WHS	9~36V Nominal:24V	3.3	0	4500	63	755	86	24700
BRA20-24S1WHS		5	0	4000	65	992	88	14700
BRA20-24S2WHS		12	0	1670	83	970	90	4700
BRA20-24S3WHS		15	0	1330	70	967	90	2200
BRA20-24D2WHS		±12	±40	±833	60	992	88	2200
BRA20-24D3WHS		±15	±60	±667	83	981	89	1000
BRA20-48S0WHS	18~75V Nominal:48V	3.3	0	4500	29	373	87	32200
BRA20-48S1WHS		5	0	4000	30	490	89	23300
BRA20-48S2WHS		12	0	1670	38	486	90	3300
BRA20-48S3WHS		15	0	1330	32	477	91	1000
BRA20-48D2WHS		±12	0	±833	35	490	89	680
BRA20-48D3WHS		±15	0	±667	36	490	89	470

Input Specifications

Input Voltage	24V nominal input	9-36V
	48V nominal input	18-75V
Input filter		Pi Type
Input surge voltage (100ms max.)	24V nominal input	50V
	48V nominal input	100V
Input reflected ripple current	Nominal Vin and full load	60mA _{p-p} max.
Start up time	Nominal Vin and constant resistive load	76ms typ.
Remote ON/OFF	Converter: ON	Open or $3.5V < V_r < 12V$
	Converter: OFF	Short ⁽⁴⁾ or $0V < V_r < 0.7V$
Sourcing current of remote control pin	Nominal Vin	< 0.2 mA
Idle input current (at Remote OFF state)	Nominal Vin	< 12 mA

Environmental Specifications

Operating ambient temperature	-40°C to +85°C (with derating)	
Maximum case temperature	+105°C max.	
Storage temperature range	-55°C to +125°C	
Relative humidity	95% RH max.	
Temperature coefficient	±0.02% / °C max.	

Output Specifications





Output power	20 Watts max.	
Voltage accuracy	Full load and nominal Vin	±1%
Minimum load	See table	
Line regulation	LL to HL at full load	±1.0%
	25% load to full load	Single ±1.0%
Load Regulation	Balanced load	Dual ±0.5%
	Unbalanced load 25% to 100% full load	±5%
Ripple and Noise	20MHz bandwidth	80mV _{p-p} max.
Over voltage protection (Zener Diode Clamp)	3.3V _{out} models	3.9V
	5.1V _{out} models	6.2V
	12V _{out} models	15V
	15V _{out} models	18V
Capacitive load	See table	
Over load protection	% of full load at nominal input	110% min.
Short circuit protection	Hiccup, continuous (Auto Recovery)	
Transient response settling time	50% load step change	700μs max.
		(1.4ms for 3.3V _{out})
Transient response over shoot	di/dt=0.8A/μs	≤ ±5% of V _o
		(≤ ±6% for 3.3V _{out})

General Specifications

Efficiency	Nominal input	See table
Isolation voltage	Input to output	1500VDC
Isolation resistance	500VDC	10^9 Ohms min.
Isolation capacitance		450pF typ.
Switching frequency		330kHz typ.
Reliability, calculated MTBF		0.35×10^6 Hrs

Physical Specifications


Case material	Nickel-coated copper
Base material	Non conductive FR4
Potting material	Silicon rubber (UL94V-0)
Dimensions	1.0 × 1.0 × 0.4 Inch (25.4 × 25.4 × 10.2 mm)
Weight	19.2g (0.68oz) typ.

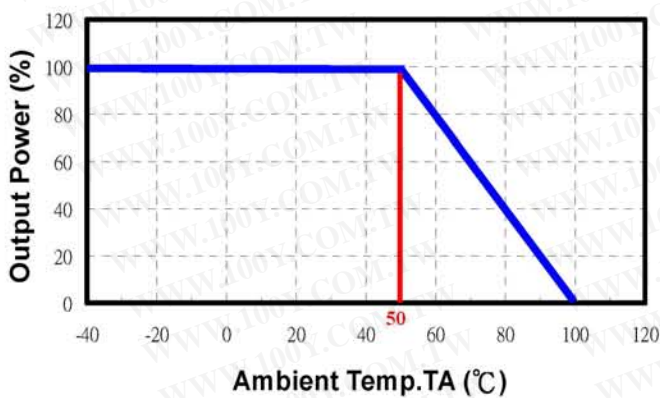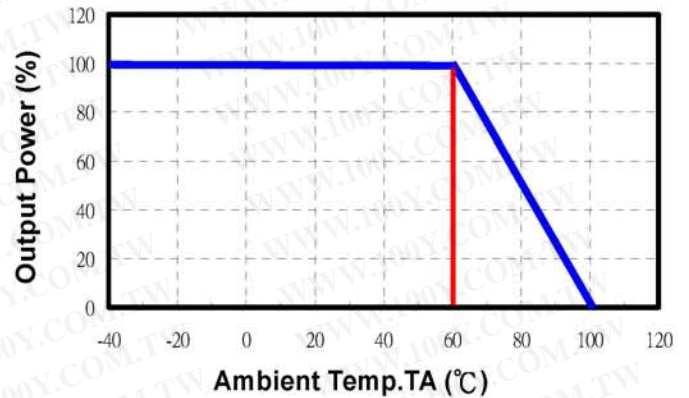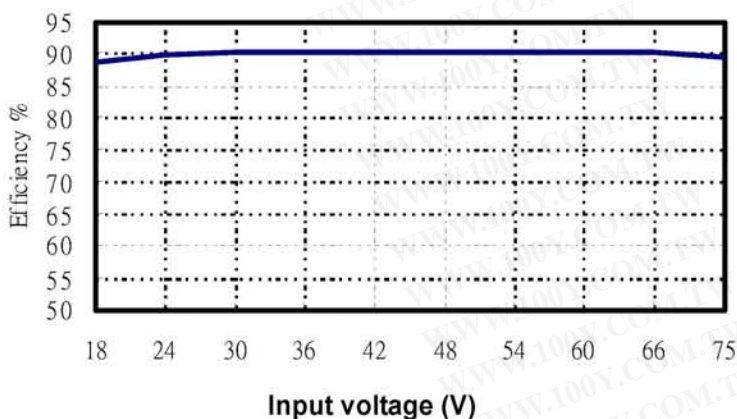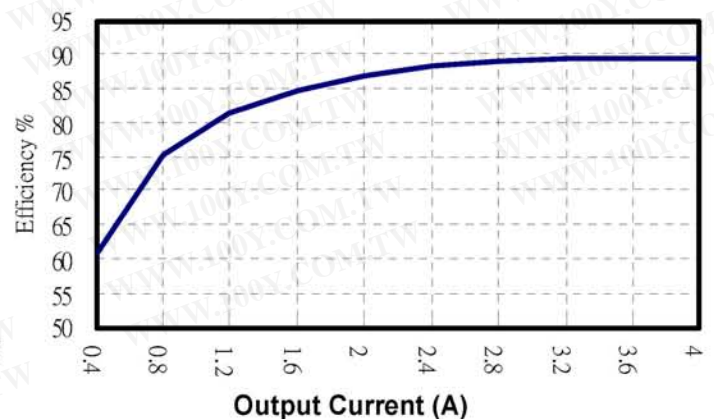Power Derating Curve (Without Heatsink)

Power Derating Curve (With Heatsink)

BRA20-48S1WHS
Input voltage vs. Efficiency

BRA20-48S1WHS
Output Current vs. Efficiency

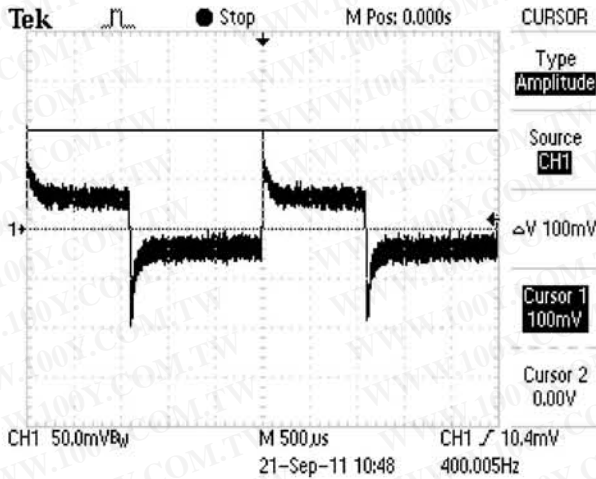


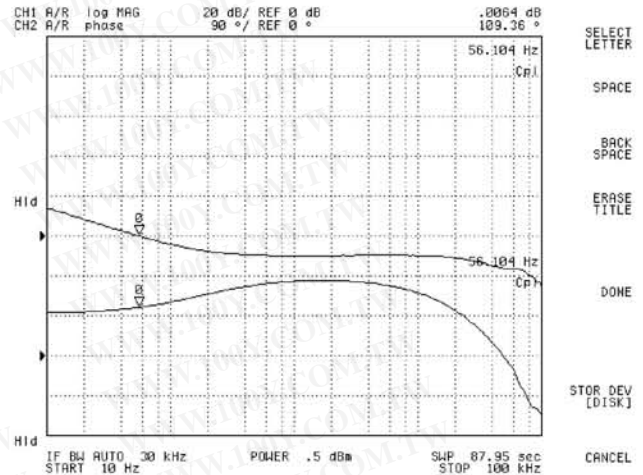
BRA20-48S1WHS

Transient Response at 50%~100% Max Load



BRA20-48S1WHS


Loop Gain & Phase at Vi=48V, Full Load



Note

1. Lo below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.
4. Short to -Vin (Pin 2).

Mechanical Dimensions

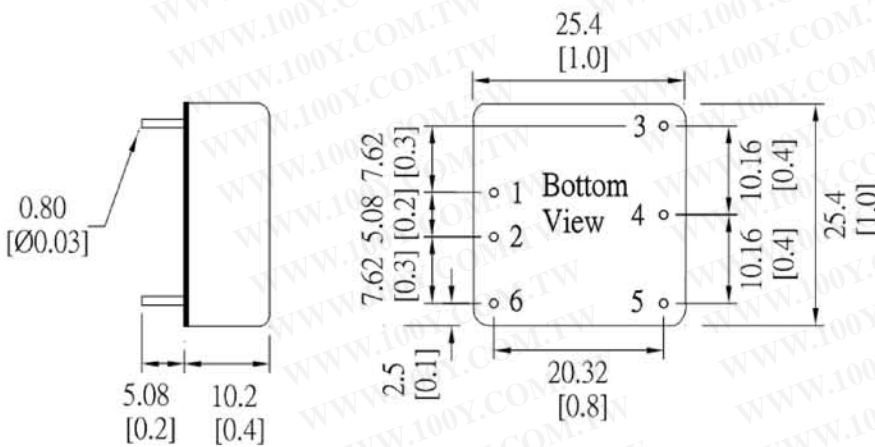

Pin Assignment		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off (optional)	

Unit: mm [inch]
Tolerance: ±0.5 [0.02]

Specifications subject to change without noticed.



Heat-sink

Material: Aluminum



Weight: 4.2g (0.15oz)

Note:

The product label on converter has to be removed before mounting the heat-sink.

For volume orders, converters will be supplied with heat-sink already mounted. Please contact factory for quotation.


Separate heat-sinks are only available for prototypes and small quantity orders.

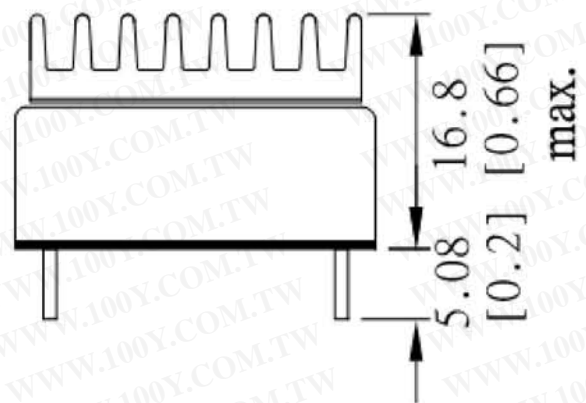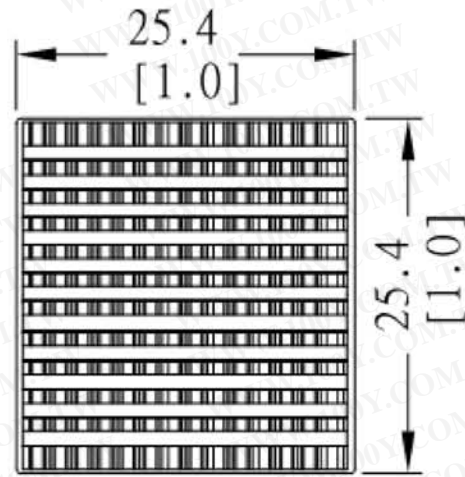

Specifications subject to change without notice.

Test Configurations

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

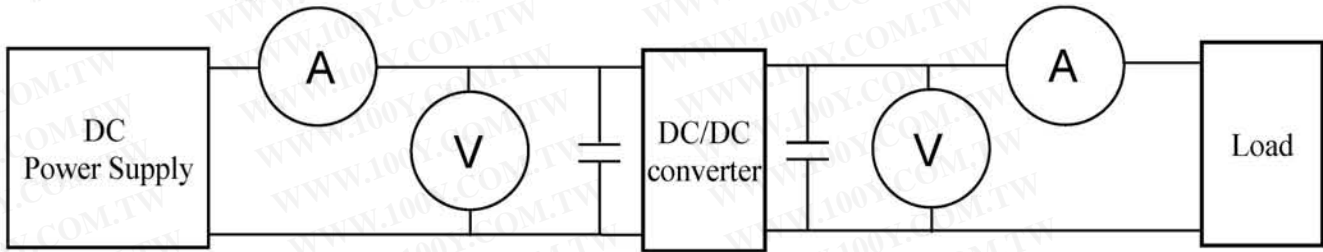

⊙DC Power Supply: It offers a wide voltage and current range precisely.

⊙Current meter (A): Accuracy → 200μA ~ 200mA 4 ranges $\pm(0.2\% \text{ rdg} + 2 \text{ digits})$

2000mA ~ 20A 2 ranges $\pm(0.3\% \text{ rdg} + 2 \text{ digits})$.

⊙Voltage meter (V): Accuracy → $\pm(0.03\% \text{ rdg} + 4 \text{ digits})$.

⊙Load: At full load.

⊙Wires: The resistance of the wires must be small.

1. **Input voltage range:** Narrow input voltage range ($\pm 10\%$) · wide input voltage range (2:1 and 4:1) ·

EX: Narrow input voltage range ($\pm 10\%$)

5V nominal input	→	4.5~5.5V
12V nominal input	→	10.8~13.2V
24V nominal input	→	21.6~26.4V

Wide input voltage range 2:1

5V nominal input	→	4.5~9V
12V nominal input	→	9~18V
24V nominal input	→	18~36V
48V nominal input	→	36~75V

Wide input voltage range 4:1 (W)

24V nominal input	→	9~36V
48V nominal input	→	18~75V

2. **Input power :**

$$P_{in} = V_{in} \times I_{in}$$

V_{in} : Input voltage

I_{in} : Input current

3. **Output power :**

$$P_{out} = V_{out} \times I_{out}$$

V_{out} : Output voltage

I_{out} : Output current

4. **Efficiency :**

$$\text{Efficiency} = \frac{P_{out}}{P_{in}} \times 100\%$$

P_{out} : Output power

P_{in} : Input power

5. **Voltage accuracy:**

$$\frac{|V_{out} - V_{out(nominal)}|}{V_{out}} \times 100\%$$

V_{out} : Output voltage

$V_{out(nominal)}$: Nominal output voltage

6. **Line regulation:** (1) Wide input voltage range and regulated output voltage series.

$$\frac{|V_{out(LL)} - V_{out(HL)}|}{V_{out(LL)}} \times 100\%$$

LL: Low Line input voltage
HL: High Line input voltage

(2) Narrow input voltage range ($\pm 10\%$) and unregulated output voltage series.

$$\text{Line regulation} = \frac{\Delta V_{out}}{\Delta V_{in}}$$

$$\Delta V_{out} = \frac{V_{out(+10\%)} - V_{out(-10\%)}}{V_{out}} \times 100\%$$

$V_{out(+10\%)}$: Output voltage at $V_{in} = 1.1 \times V_{in}(\text{nominal})$ & full load

$V_{out(-10\%)}$: Output voltage at $V_{in} = 0.9 \times V_{in}(\text{nominal})$ & full load

V_{out} : Output voltage at $V_{in} = V_{in}(\text{nominal})$ & full load

$$\Delta V_{in} = \frac{V_{in(+10\%)} - V_{in(-10\%)}}{V_{in}(\text{nominal})} \times 100\%$$

$V_{in(+10\%)}$: Input voltage = $1.1 \times V_{in}(\text{nominal})$

$V_{in(-10\%)}$: Input voltage = $0.9 \times V_{in}(\text{nominal})$

$V_{in}(\text{nominal})$: Nominal Input voltage


7. **Load regulation :**

$$\frac{|V_{out(FL)} - V_{out(NL)}|}{V_{out(FL)}} \times 100\%$$


$V_{out(FL)}$: Output voltage at full load

$V_{out(NL)}$: Output voltage at 25% full load or 10% full load

8. **Ripple and Noise:** as shown below. The bandwidth is 0-20MHz.

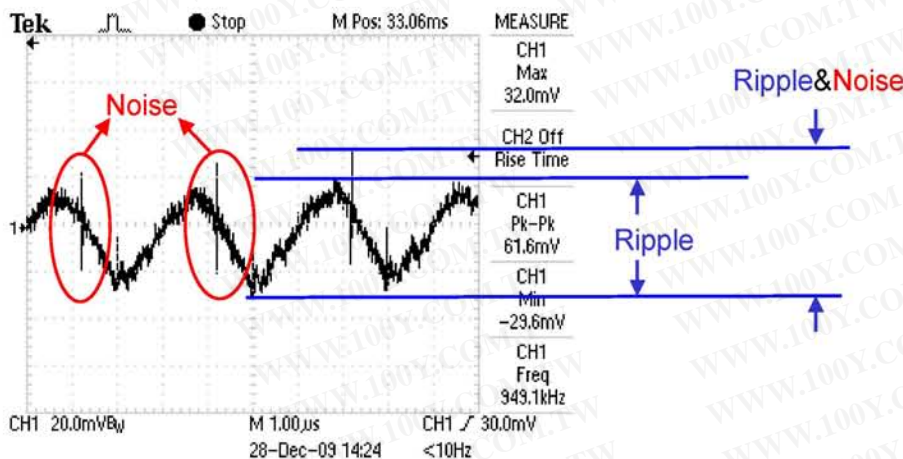


Output Ripple&Noise measurement test circuit: as shown below.

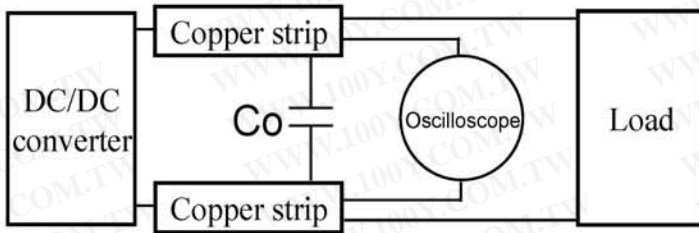

Co: usually 0.47uF.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

9. **Temperature derating curve:** The DC-DC converter will operate over a wider temperature range if less power is drawn from the output and the device is already running. The temperature derating curve shows the operating power-temperature range. As shown below.

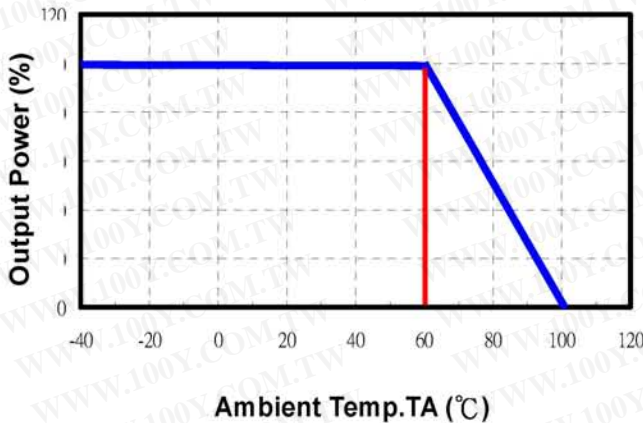

10. **Switching frequency:** The nominal operating frequency of the DC-DC converters.
11. **Input to output isolation:** The dielectric breakdown strength test between input and output circuits. This is the isolation voltage the device is capable of withstanding for a specified time, usually 1 second or 1 minute.