


DURACELL®

Lithium/Manganese Dioxide


2/3A

Li/MnO₂

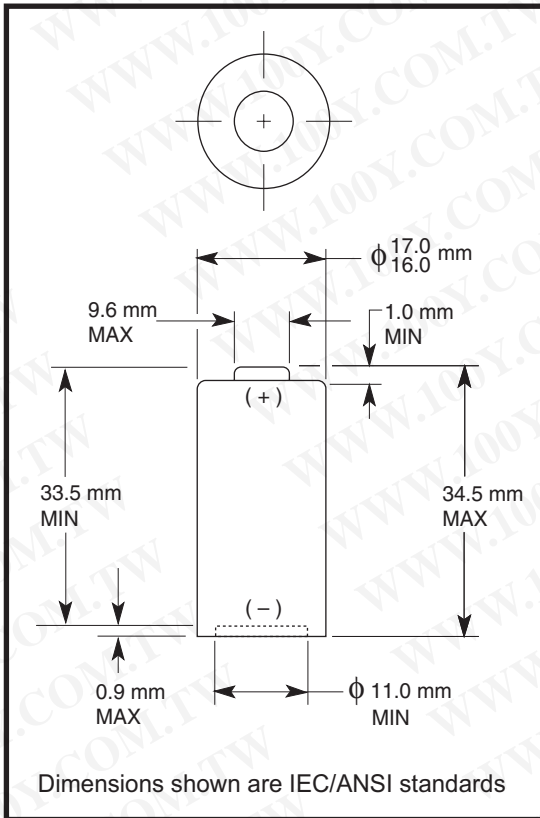


Nominal Voltage:	3.0 V
Typical Voltage:	3.2-3.3 V
Nominal Internal Impedance:	0.25 ohm @ 1kHz
Average Weight:	17.0 gm
Volume:	7.18 cm ³
Terminals:	Flat, Recessed Negative Terminal, Nickel Plated Steel
Operating Temperature Range:	-20°C to 75°C (-4°F to 167°F)
ANSI:	5018LC
IEC:	CR17345

Delivered Energy vs. Power Drain
@ Various Cutoff Voltage - Room Temperature

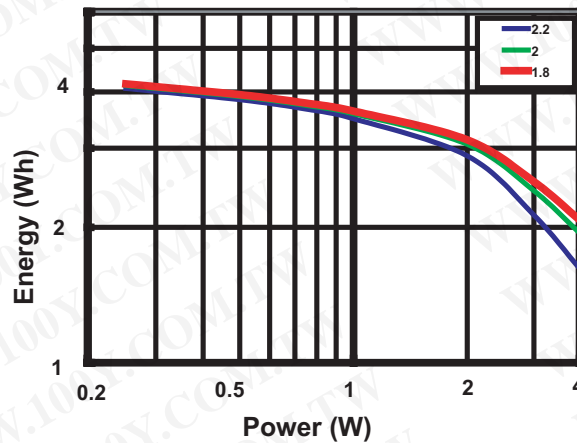

Duracell 2/3A Typical Performance

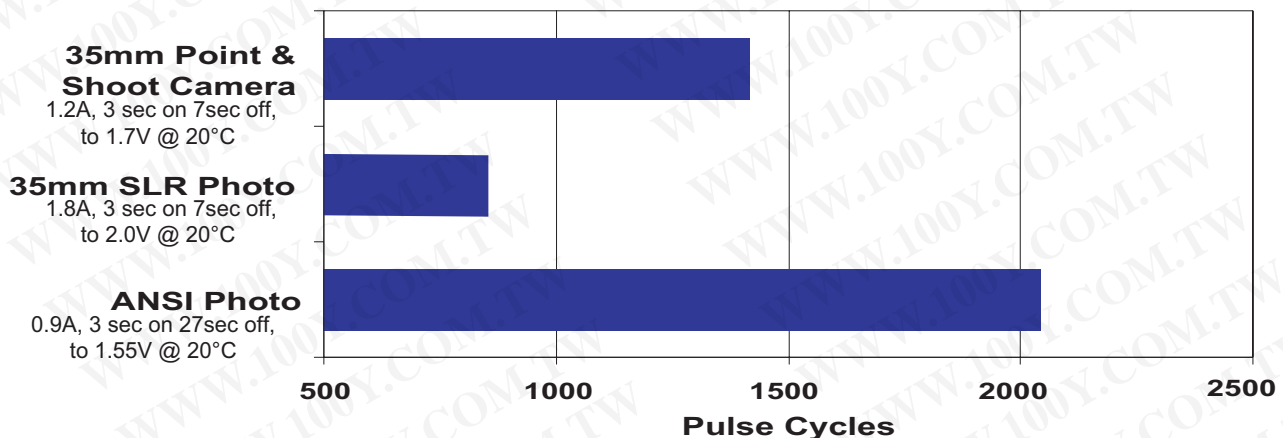

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


DURACELL®

Lithium/Manganese Dioxide


2/3A

Li/MnO₂


1.8 Amp 3 sec on / 7 sec off
@ Various Temperatures

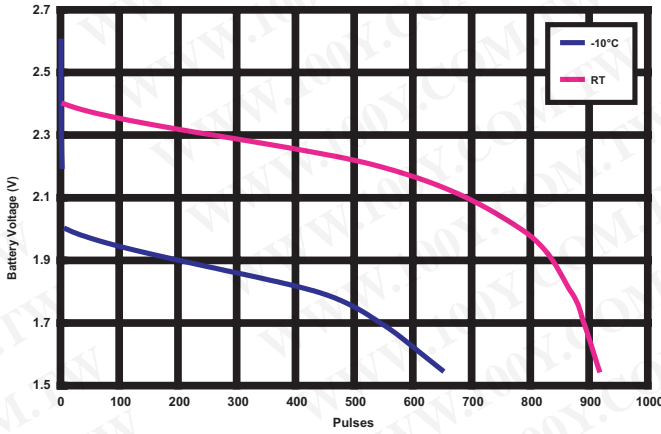


1.2 Amp, 3 sec on / 7 sec off
@ Various Temperatures

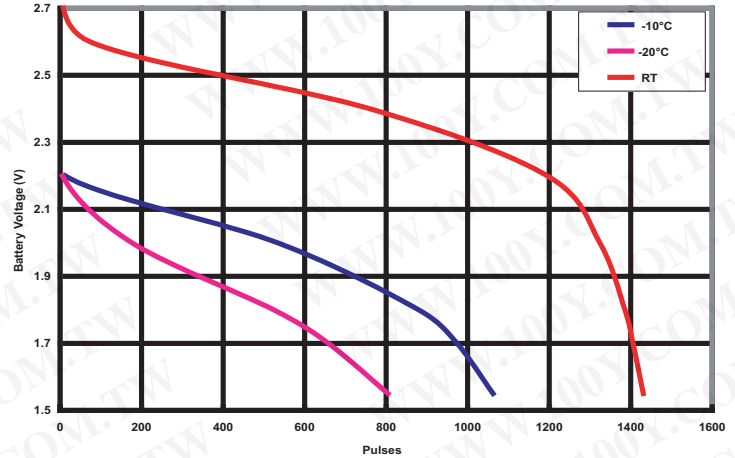

Continuous Discharge
RT to 1.55 Volts

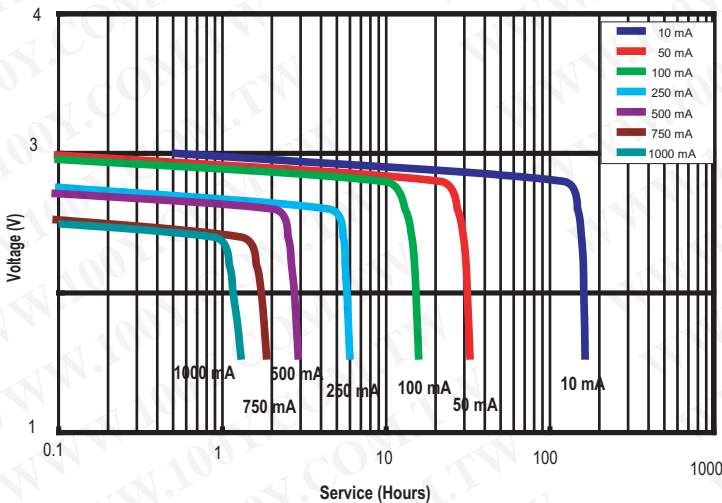

0.9 Amp, 3 sec on / 27 sec off
@ Various Temperatures

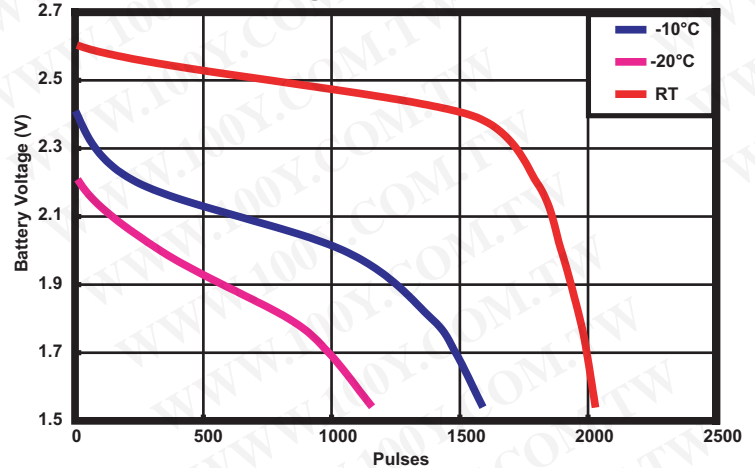

DURACELL®

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.