


battery type: np1.2-6

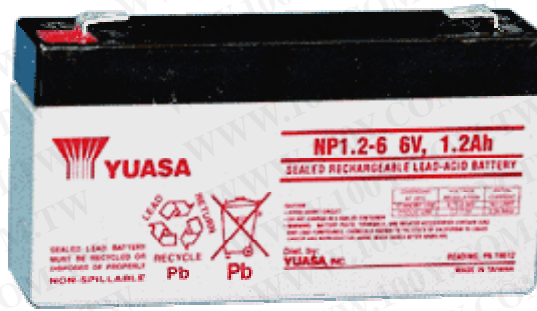

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1.	公稱電壓 nominal voltage:	6v
2.	尺寸 dimension	
	長度 length:	97.0±1 mm
	寬度 width:	25.0±1 mm
	高度 height:	51.0±1 mm
	總高 total height:	54.5±2 mm
3.	重量 weight(approx.)	0.64pounds(0.29kg)
4.	公稱容量 nominal capacity:	
	20 小時率 20hr rate of 0.06a to 5.25v	1.2ah
	3 小時率 3hr rate of 0.30a to 5.01v	0.9ah
	1 小時率 1hr rate of 0.72a to 4.80v	0.72ah
5.	內部阻抗 internal resistance:	42~60mΩ
6.	最大充電電流 max charged current:	0.25ca (0.3a)
	最大放電電流 max discharged current:	18a(5 秒)
7.	操作溫度範圍 operation temperature range	
	充電 charge	5°F to 104°F(-15°C to 40°C)
	放電 discharge	5°F to 122°F(-15°C to 50°C)
8.	保存溫度範圍 storage temperature range	5°F to 104°F(-15°C to 40°C)
9.	浮充 floating charge:	6.825±0.07v
10.	壽命 expected life(25°C)	3~5 years in float charging
11.	密閉構造 sealed construction	
	can be operated, charged or stored in any position without leakage.	
	can not be charged while the terminal is downward.	
12.	標準端子 standard terminal:	faston tab 187
13.	電槽材質 housing material:	abs

np1.2-6 constant wattage-typical run times(25°C, 77°F)

time final voltage	0.5m	1.0m	2.0m	5.0m	10.0m	15.0m	30.0m
4.8v	70w	59.7w	45.9w	28.1w	19.6w	14.3w	7.60w
5.1v	65w	54.4w	41.2w	27.9w	18.0w	13.5w	7.10w
5.4v	51w	44.5w	36.1w	25.6w	16.0w	12.5w	8.30w