



■Specifications


Nominal Voltage		12V
Rated Capacity (20 hour rate)		1.2Ah
Dimensions	Total Height (with terminals)	(60mm)
	Height	(52mm)
	Length	(96mm)
	Width	(42mm)
Weight		Aoorix,8.60 lbs(3900g)

■Specifications

Capacity * 77°F(25°C)	20 hour rate (640mA)	12.8Ah
	10 hour rate (1160mA)	11.6Ah
	5 hour rate (2100mA)	10.5Ah
	1 hour rate (8400mA)	8.4Ah
	1.5 hour discharge to 10.5V	5.8A
Internal Resistance	Full Charged Battery 77°F(25°C)	20mΩ
Capacity affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	63%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	80%
	Capacity after 9 month storage	62%
Charge (Constant Voltage)	Cycle	Initial Charge Current less than 4A Voltage 14.8~15.3V/12V 77°F(25°C)
	Stand By	Voltage 13.8~14.3V/12V 77°F(25°C)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Discharge curves 77°F(25°C)*

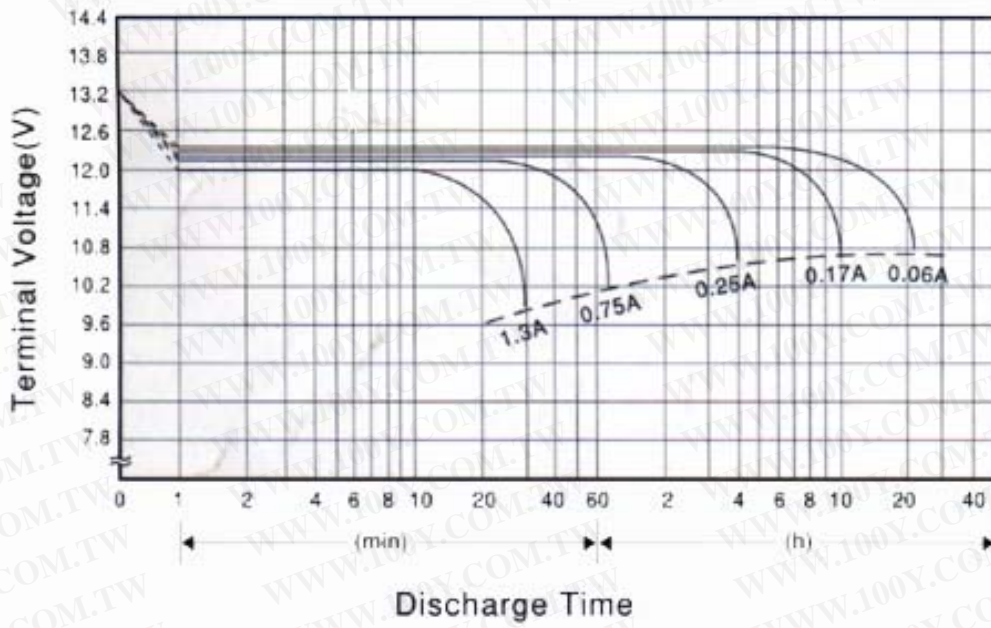

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)