


Art.-Number: 701117

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

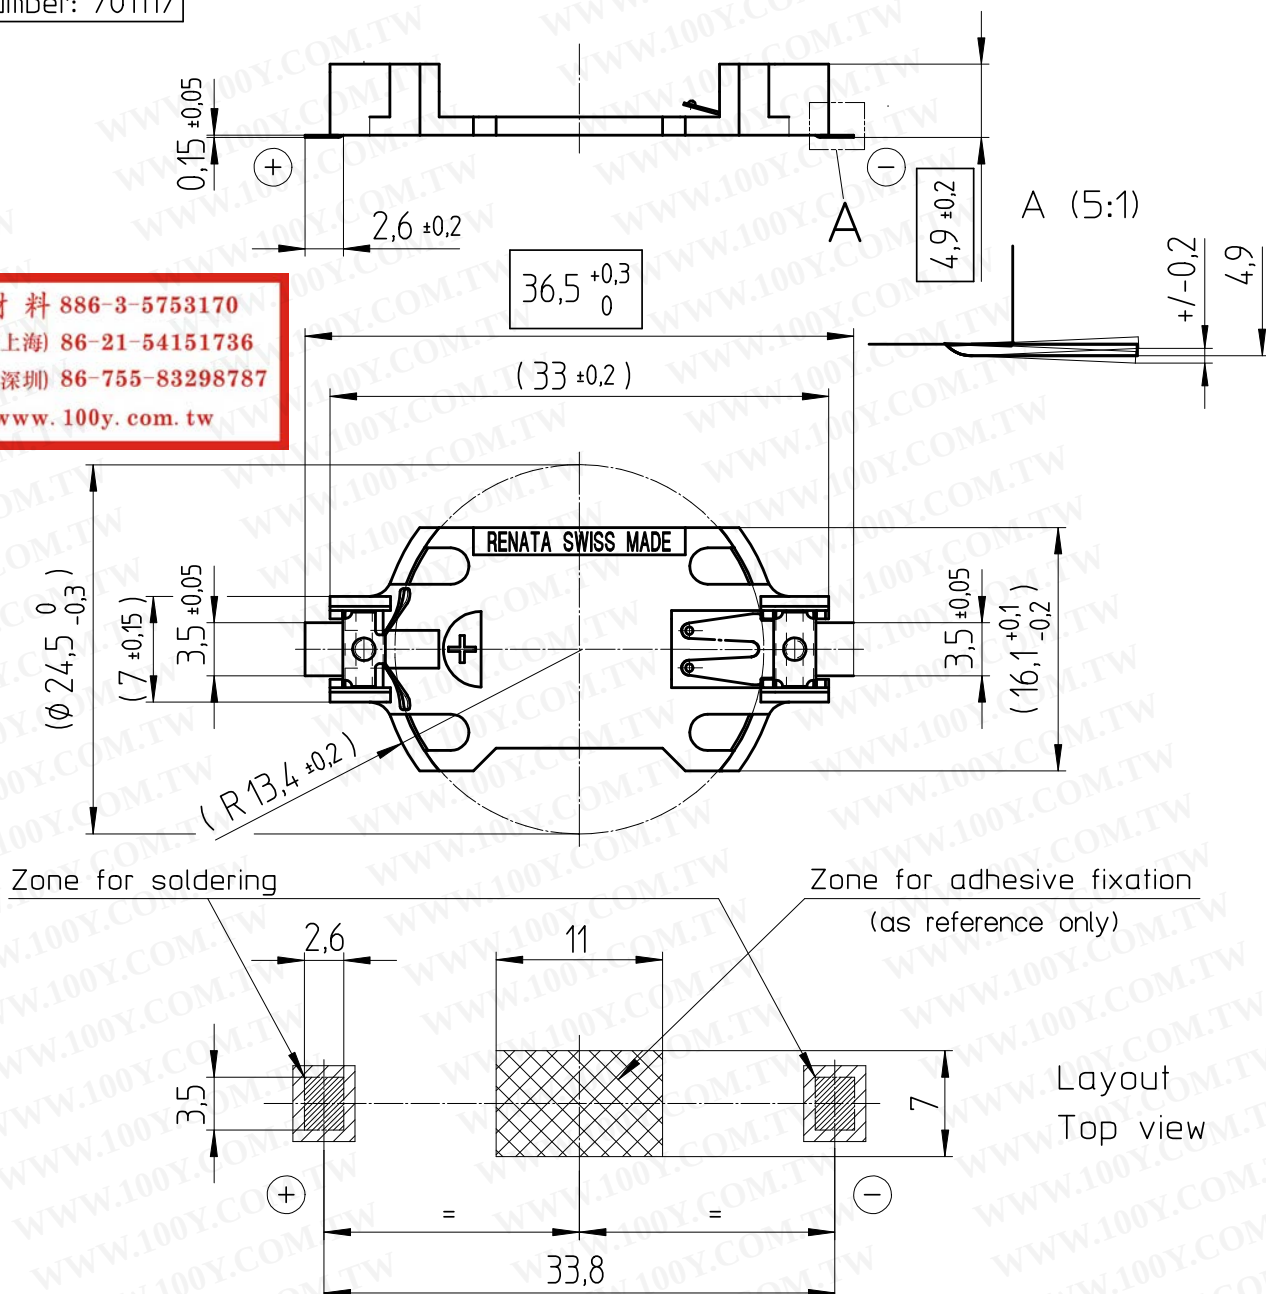

Layout
Top view

Holder material : heat resistant, glass-fiber reinforced LCP

Battery contacts : spring stainless steel 301 nickel plated, thickness 10µm

Solder contacts : spring stainless steel 301 solder plated throughout 100% Sn, thickness 10µm

All framed values will be used for dimension checking !

Rev.	☐			Rev.	☐			 	Customer's Approval			
Rev.	☐			Rev.	☐				Date			
Rev.	☐			Rev.	☐				Signature			
Titel:								Scale 2:1	Drawn	25.01.05	SRi	
SMTU2430-LF									Checked			
									Approved	02.02.05	MHo	
renata  batteries								CH-4452 Itingen Switzerland		3.8761.4-		

Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

Samples can deviate in the execution from the serie.