

Primary lithium batteries

LS 26500

3.6V Primary lithium-thionyl chloride (Li-SOCl₂)

High energy

C-size bobbin cell

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



For applications requesting good voltage response and operating life in -60°C/+85°C environments.

Key features

- High and stable operating voltage
- Low self-discharge rate
(less than 1% after 1 year of storage at +20°C)
- Stainless steel container
- Hermetic glass-to-metal sealing
- Built-in safety vent
- Finish with or without flat positive end
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard and EN 50020 intrinsic safety standard
- Underwriters Laboratories (UL) Component Recognition (File Number MH 12609)
- Restricted for transport (Class 9)

Main applications

- Utility metering
- Automatic meter readers
- Buoys
- Measuring equipment
- Industrial applications
- Professional electronics

etc...

Optional upon request

- Low magnetic version

Cell size references

UM2 - R14 - C

Electrical characteristics

(typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity (at 4 mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).	7.7 Ah
---	--------

Open circuit voltage (at +20°C)	3.67V
---------------------------------	-------

Nominal voltage (at 0.5 mA +20°C)	3.6V
-----------------------------------	------

Pulse capability: Typically up to 300 mA (300 mA/0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 µA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult Saft)

Continuous current permitting 50% of the nominal capacity to be achieved at +20°C with 2.0V cut off. (Higher currents possible, consult Saft)	150 mA
--	--------

Storage (recommended) (for more severe conditions, consult Saft)	+30°C (+86°F) max
---	-------------------

Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult Saft)	-60°C/+85°C (-76°F/+185°F)
---	-------------------------------

Physical characteristics

Diameter (max)	26.0 mm (1.02 in)
----------------	-------------------


Height (max)	49.1 mm or 50.4 mm (1.93 in or 1.98 in) depending on finish type
--------------	--

Typical weight	48 g (1.7 oz)
----------------	---------------


Li metal content	approx. 2.0 g
------------------	---------------

Available termination suffix

CNR	radial tabs
3 PF, 3 PF RP	radial pins
CNA (AX)	axial leads
FL	flying leads... etc.

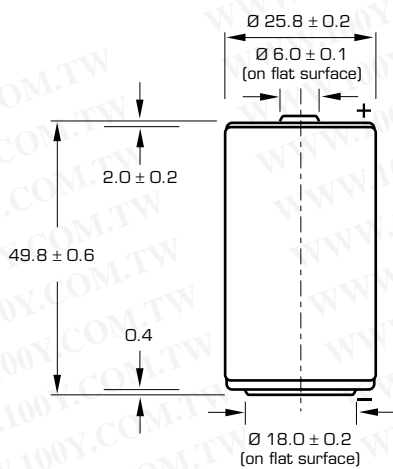

Finished version with protruding positive end cap

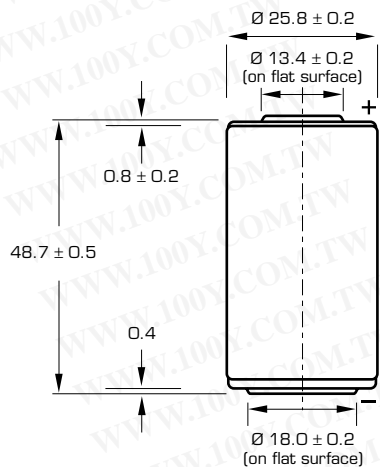

Finished version with flat positive end cap


Dimensions in mm.

Storage


- The storage area should be clean, cool (not exceeding + 30°C), dry and ventilated.

Warning


- Fire, explosion and severe burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C (212°F), incinerate, or expose contents to water.
- Do not solder directly to the cell.

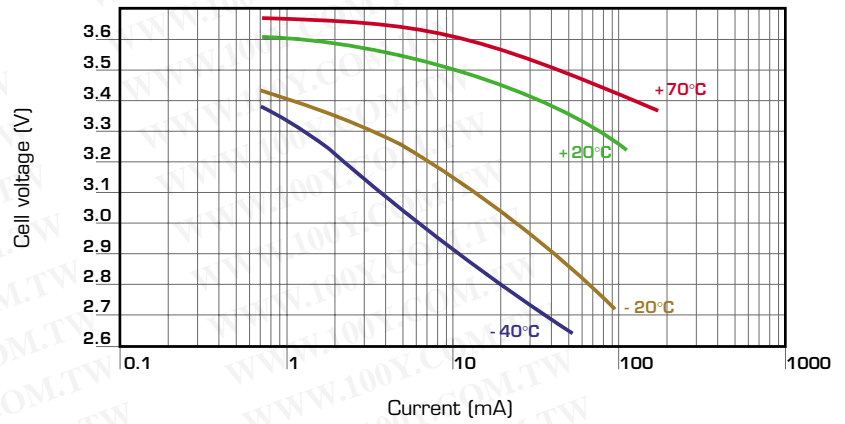

Voltage plateau versus Current and Temperature (at mid-discharge)

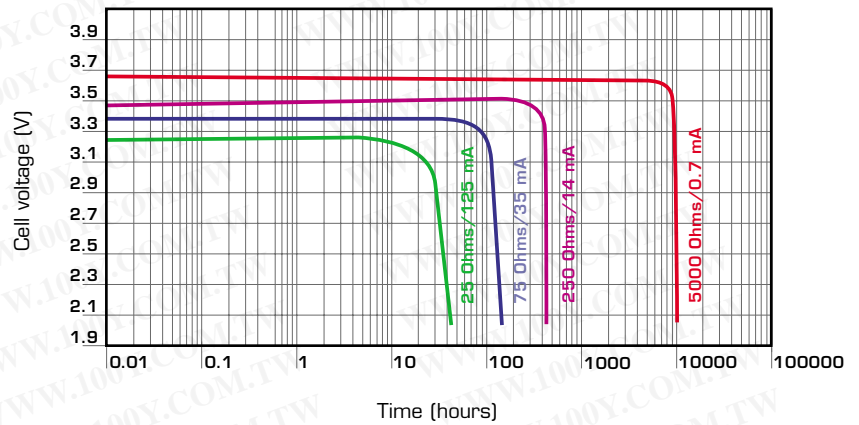

Typical discharge profiles at +20°C

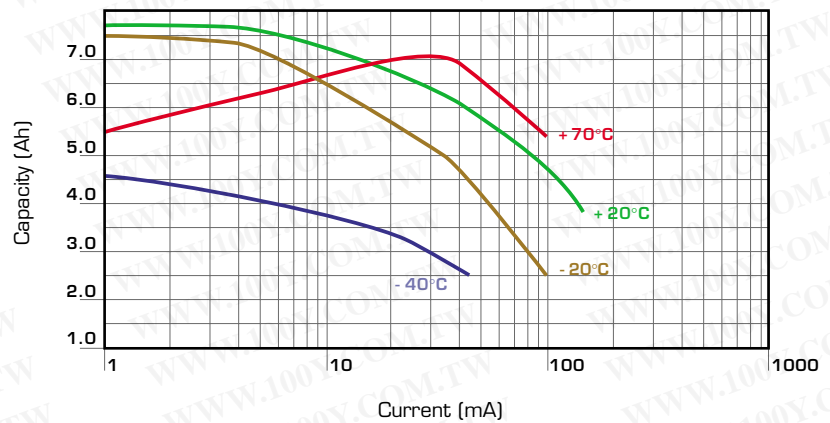

Restored Capacity versus Current and Temperature (2.0V cut off)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)