

## LPV521 Nanopower, 1.8V, RRIO, CMOS Input, Operational Amplifier

Check for Samples: [LPV521](#)


### FEATURES

- For  $V_S = 5V$ , Typical Unless Otherwise Noted
  - Supply Current at  $V_{CM} = 0.3V$  400 nA (Max)
  - Operating Voltage Range 1.6V to 5.5V
  - Low  $TCV_{OS}$  3.5  $\mu V/^\circ C$  (max)
  - $V_{OS}$  1 mV (Max)
  - Input Bias Current 40 fA
  - PSRR 109 dB
  - CMRR 102 dB
  - Open Loop Gain 132 dB
  - Gain Bandwidth Product 6.2 kHz
  - Slew Rate 2.4 V/ms
  - Input Voltage Noise at  $f = 100$  Hz 255 nV/ $\sqrt{Hz}$
  - Temperature Range  $-40^\circ C$  to  $125^\circ C$

### APPLICATIONS

- Wireless Remote Sensors
- Powerline Monitoring
- Power Meters
- Battery Powered Industrial Sensors
- Micropower Oxygen sensor and Gas Sensor
- Active RFID Readers
- Zigbee Based Sensors for HVAC Control
- Sensor Network Powered by Energy Scavenging

### Typical Application

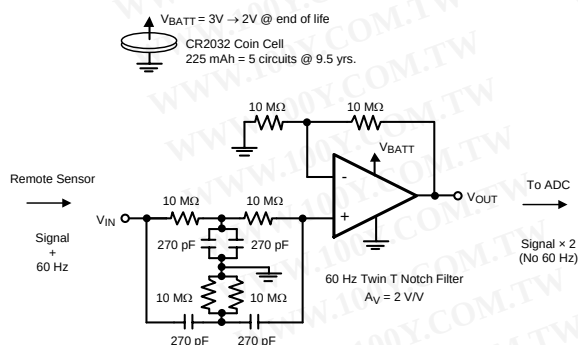


### DESCRIPTION

The LPV521 is a single nanopower 552 nW amplifier designed for ultra long life battery applications. The operating voltage range of 1.6V to 5.5V coupled with typically 351 nA of supply current make it well suited for RFID readers and remote sensor nanopower applications. The device has input common mode voltage 0.1V over the rails, guaranteed  $TCV_{OS}$  and voltage swing to the rail output performance. The LPV521 has a carefully designed CMOS input stage that outperforms competitors with typically 40 fA  $I_{BIAS}$  currents. This low input current significantly reduces  $I_{BIAS}$  and  $I_{OS}$  errors introduced in megohm resistance, high impedance photodiode, and charge sense situations. The LPV521 is a member of the PowerWise® family and has an exceptional power-to-performance ratio.

The wide input common mode voltage range, guaranteed 1 mV  $V_{OS}$  and 3.5  $\mu V/^\circ C$   $TCV_{OS}$  enables accurate and stable measurement for both high side and low side current sensing.

EMI protection was designed into the device to reduce sensitivity to unwanted RF signals from cell phones or other RFID readers.

The LPV521 is offered in the 5-pin SC70 package.

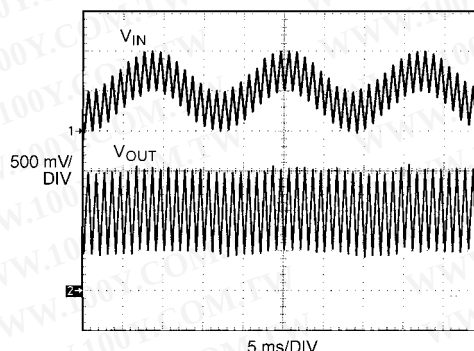

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerWise is a registered trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2009–2013, Texas Instruments Incorporated



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## Absolute Maximum Ratings<sup>(1)(2)</sup>

|                                                                   |                                    |                                              |
|-------------------------------------------------------------------|------------------------------------|----------------------------------------------|
| ESD Tolerance <sup>(3)</sup>                                      | Human Body Model                   | 2000V                                        |
|                                                                   | Machine Model                      | 200V                                         |
|                                                                   | Charge-Device Model                | 1000V                                        |
| Any pin relative to V <sup>-</sup>                                |                                    | 6V, -0.3V                                    |
| IN+, IN-, OUT Pins                                                |                                    | V <sup>+</sup> + 0.3V, V <sup>-</sup> - 0.3V |
| V <sup>+</sup> , V <sup>-</sup> , OUT Pins                        |                                    | 40mA                                         |
| Differential Input Voltage (V <sub>IN+</sub> - V <sub>IN-</sub> ) |                                    | ±300 mV                                      |
| Storage Temperature Range                                         |                                    | -65°C to 150°C                               |
| Junction Temperature <sup>(4)</sup>                               |                                    | 150°C                                        |
| Mounting Temperature                                              | Infrared or Convection (30 sec.)   | 260°C                                        |
|                                                                   | Wave Soldering Lead Temp. (4 sec.) | 260°C                                        |

- (1) Absolute Maximum Ratings indicate limits beyond which damage may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office / Distributors for availability and specifications.
- (3) Human Body Model, applicable std. MIL-STD-883, Method 3015.7. Machine Model, applicable std. JESD22-A115-A (ESD MM std. of JEDEC) Field-Induced Charge-Device Model, applicable std. JESD22-C101-C (ESD FICDM std. of JEDEC).
- (4) The maximum power dissipation is a function of T<sub>J(MAX)</sub>, θ<sub>JA</sub>. The maximum allowable power dissipation at any ambient temperature is P<sub>D</sub> = (T<sub>J(MAX)</sub> - T<sub>A</sub>) / θ<sub>JA</sub>. All numbers apply for packages soldered directly onto a PC Board.

## Operating Ratings<sup>(1)</sup>

|                                                                    |                |
|--------------------------------------------------------------------|----------------|
| Temperature Range <sup>(2)</sup>                                   | -40°C to 125°C |
| Supply Voltage (V <sub>S</sub> = V <sup>+</sup> - V <sup>-</sup> ) | 1.6V to 5.5V   |
| Package Thermal Resistance (θ <sub>JA</sub> ) <sup>(2)</sup>       |                |
| 5-Pin SC70                                                         | 456 °C/W       |

- (1) Absolute Maximum Ratings indicate limits beyond which damage may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and test conditions, see the Electrical Characteristics.
- (2) The maximum power dissipation is a function of T<sub>J(MAX)</sub>, θ<sub>JA</sub>. The maximum allowable power dissipation at any ambient temperature is P<sub>D</sub> = (T<sub>J(MAX)</sub> - T<sub>A</sub>) / θ<sub>JA</sub>. All numbers apply for packages soldered directly onto a PC Board.

## 1.8V DC Electrical Characteristics<sup>(1)</sup>

Unless otherwise specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 1.8\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V_O = V^+/2$ , and  $R_L > 1\text{ M}\Omega$ .

**Boldface** limits apply at the temperature extremes.

| Symbol     | Parameter                                 | Conditions                                                                      | Min<br>(2)      | Typ<br>(3) | Max<br>(2)                                | Units                        |
|------------|-------------------------------------------|---------------------------------------------------------------------------------|-----------------|------------|-------------------------------------------|------------------------------|
| $V_{OS}$   | Input Offset Voltage                      | $V_{CM} = 0.3\text{V}$                                                          |                 | 0.1        | $\pm 1.0$<br><b><math>\pm 1.23</math></b> | mV                           |
|            |                                           | $V_{CM} = 1.5\text{V}$                                                          |                 | 0.1        | $\pm 1.0$<br><b><math>\pm 1.23</math></b> |                              |
| $TCV_{OS}$ | Input Offset Voltage Drift <sup>(4)</sup> |                                                                                 |                 | $\pm 0.4$  | <b><math>\pm 3</math></b>                 | $\mu\text{V}/^\circ\text{C}$ |
| $I_{BIAS}$ | Input Bias Current                        |                                                                                 |                 | 0.01       | $\pm 1$<br><b><math>\pm 50</math></b>     | pA                           |
| $I_{OS}$   | Input Offset Current                      |                                                                                 |                 | 10         |                                           | fA                           |
| CMRR       | Common Mode Rejection Ratio               | $0\text{V} \leq V_{CM} \leq 1.8\text{V}$                                        | 66<br><b>60</b> | 92         |                                           | dB                           |
|            |                                           | $0\text{V} \leq V_{CM} \leq 0.7\text{V}$                                        | 75<br><b>74</b> | 101        |                                           |                              |
|            |                                           | $1.2\text{V} \leq V_{CM} \leq 1.8\text{V}$                                      | 75<br><b>53</b> | 120        |                                           |                              |
| PSRR       | Power Supply Rejection Ratio              | $1.6\text{V} \leq V^+ \leq 5.5\text{V}$<br>$V_{CM} = 0.3\text{V}$               | 85<br><b>76</b> | 109        |                                           | dB                           |
| CMVR       | Common Mode Voltage Range                 | CMRR $\geq 67\text{ dB}$<br>CMRR $\geq 60\text{ dB}$                            | 0<br><b>0</b>   |            | 1.8<br><b>1.8</b>                         | V                            |
| $A_{VOL}$  | Large Signal Voltage Gain                 | $V_O = 0.5\text{V}$ to $1.3\text{V}$<br>$R_L = 100\text{ k}\Omega$ to $V^+/2$   | 74<br><b>73</b> | 125        |                                           | dB                           |
| $V_O$      | Output Swing High                         | $R_L = 100\text{ k}\Omega$ to $V^+/2$<br>$V_{IN}(\text{diff}) = 100\text{ mV}$  |                 | 2          | 50<br><b>50</b>                           | mV from<br>either rail       |
|            | Output Swing Low                          | $R_L = 100\text{ k}\Omega$ to $V^+/2$<br>$V_{IN}(\text{diff}) = -100\text{ mV}$ |                 | 2          | 50<br><b>50</b>                           |                              |
| $I_O$      | Output Current <sup>(5)</sup>             | Sourcing, $V_O$ to $V^-$<br>$V_{IN}(\text{diff}) = 100\text{ mV}$               | 1<br><b>0.5</b> | 3          |                                           | mA                           |
|            |                                           | Sinking, $V_O$ to $V^+$<br>$V_{IN}(\text{diff}) = -100\text{ mV}$               | 1<br><b>0.5</b> | 3          |                                           |                              |
| $I_S$      | Supply Current                            | $V_{CM} = 0.3\text{V}$                                                          |                 | 345        | 400<br><b>580</b>                         | nA                           |
|            |                                           | $V_{CM} = 1.5\text{V}$                                                          |                 | 472        | 600<br><b>850</b>                         |                              |

- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that  $T_J = T_A$ . No guarantee of parametric performance is indicated in the electrical tables under conditions of internal self-heating where  $T_J > T_A$ . Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) All limits are guaranteed by testing, statistical analysis or design.
- (3) Typical values represent the most likely parametric norm at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.
- (4) The offset voltage average drift is determined by dividing the change in  $V_{OS}$  at the temperature extremes by the total temperature change.
- (5) The short circuit test is a momentary open loop test.



## 1.8V AC Electrical Characteristics<sup>(1)</sup>

Unless otherwise specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 1.8\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_L > 1\text{M}\Omega$ .

**Boldface** limits apply at the temperature extremes.

| Symbol     | Parameter                            | Conditions                                                  | Min<br>(2)   | Typ<br>(3) | Max<br>(2) | Units                        |
|------------|--------------------------------------|-------------------------------------------------------------|--------------|------------|------------|------------------------------|
| GBW        | Gain-Bandwidth Product               | $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$           |              | 6.1        |            | kHz                          |
| SR         | Slew Rate                            | $A_V = +1$ ,<br>$V_{\text{IN}} = 0\text{V to } 1.8\text{V}$ | Falling Edge | 2.9        |            | V/ms                         |
|            |                                      |                                                             | Rising Edge  | 2.3        |            |                              |
| $\theta_m$ | Phase Margin                         | $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$           |              | 72         |            | deg                          |
| $G_m$      | Gain Margin                          | $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$           |              | 19         |            | dB                           |
| $e_n$      | Input-Referred Voltage Noise Density | $f = 100\text{ Hz}$                                         |              | 265        |            | $\text{nV}/\sqrt{\text{Hz}}$ |
|            | Input-Referred Voltage Noise         | 0.1 Hz to 10 Hz                                             |              | 24         |            | $\mu\text{V}_{\text{PP}}$    |
| $i_n$      | Input-Referred Current Noise         | $f = 100\text{ Hz}$                                         |              | 100        |            | $\text{fA}/\sqrt{\text{Hz}}$ |

- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that  $T_J = T_A$ . No guarantee of parametric performance is indicated in the electrical tables under conditions of internal self-heating where  $T_J > T_A$ . Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) All limits are guaranteed by testing, statistical analysis or design.
- (3) Typical values represent the most likely parametric norm at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.

## 3.3V DC Electrical Characteristics<sup>(1)</sup>

Unless otherwise specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 3.3\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_L > 1\text{M}\Omega$ .

**Boldface** limits apply at the temperature extremes.

| Symbol                   | Parameter                                 | Conditions                                                                          | Min<br>(2)       | Typ<br>(3) | Max<br>(2)                                | Units                        |
|--------------------------|-------------------------------------------|-------------------------------------------------------------------------------------|------------------|------------|-------------------------------------------|------------------------------|
| $V_{\text{OS}}$          | Input Offset Voltage                      | $V_{\text{CM}} = 0.3\text{V}$                                                       |                  | 0.1        | $\pm 1.0$<br><b><math>\pm 1.23</math></b> | mV                           |
|                          |                                           | $V_{\text{CM}} = 3\text{V}$                                                         |                  | 0.1        | $\pm 1.0$<br><b><math>\pm 1.23</math></b> |                              |
| $\text{TCV}_{\text{OS}}$ | Input Offset Voltage Drift <sup>(4)</sup> |                                                                                     |                  | $\pm 0.4$  | <b><math>\pm 3</math></b>                 | $\mu\text{V}/^\circ\text{C}$ |
| $I_{\text{BIAS}}$        | Input Bias Current                        |                                                                                     |                  | 0.01       | $\pm 1$<br><b><math>\pm 50</math></b>     | pA                           |
| $I_{\text{OS}}$          | Input Offset Current                      |                                                                                     |                  | 20         |                                           | fA                           |
| CMRR                     | Common Mode Rejection Ratio               | $0\text{V} \leq V_{\text{CM}} \leq 3.3\text{V}$                                     | 72<br><b>70</b>  | 97         |                                           | dB                           |
|                          |                                           | $0\text{V} \leq V_{\text{CM}} \leq 2.2\text{V}$                                     | 78<br><b>75</b>  | 106        |                                           |                              |
|                          |                                           | $2.7\text{V} \leq V_{\text{CM}} \leq 3.3\text{V}$                                   | 77<br><b>76</b>  | 121        |                                           |                              |
| PSRR                     | Power Supply Rejection Ratio              | $1.6\text{V} \leq V^+ \leq 5.5\text{V}$<br>$V_{\text{CM}} = 0.3\text{V}$            | 85<br><b>76</b>  | 109        |                                           | dB                           |
| CMVR                     | Common Mode Voltage Range                 | CMRR $\geq 72\text{ dB}$<br>CMRR $\geq 70\text{ dB}$                                | -0.1<br><b>0</b> |            | 3.4<br><b>3.3</b>                         | V                            |
| $A_{\text{VOL}}$         | Large Signal Voltage Gain                 | $V_O = 0.5\text{V to } 2.8\text{V}$<br>$R_L = 100\text{ k}\Omega \text{ to } V^+/2$ | 82<br><b>76</b>  | 120        |                                           | dB                           |

- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that  $T_J = T_A$ . No guarantee of parametric performance is indicated in the electrical tables under conditions of internal self-heating where  $T_J > T_A$ . Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) All limits are guaranteed by testing, statistical analysis or design.
- (3) Typical values represent the most likely parametric norm at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.
- (4) The offset voltage average drift is determined by dividing the change in  $V_{\text{OS}}$  at the temperature extremes by the total temperature change.

### 3.3V DC Electrical Characteristics<sup>(1)</sup> (continued)

Unless otherwise specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 3.3\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V_O = V^+/2$ , and  $R_L > 1\text{M}\Omega$ .

**Boldface** limits apply at the temperature extremes.

| Symbol | Parameter                     | Conditions                                                                      | Min<br>(2)    | Typ<br>(3) | Max<br>(2)        | Units                     |
|--------|-------------------------------|---------------------------------------------------------------------------------|---------------|------------|-------------------|---------------------------|
| $V_O$  | Output Swing High             | $R_L = 100\text{ k}\Omega$ to $V^+/2$<br>$V_{IN}(\text{diff}) = 100\text{ mV}$  |               | 3          | 50<br><b>50</b>   | mV<br>from either<br>rail |
|        | Output Swing Low              | $R_L = 100\text{ k}\Omega$ to $V^+/2$<br>$V_{IN}(\text{diff}) = -100\text{ mV}$ |               | 2          | 50<br><b>50</b>   |                           |
| $I_O$  | Output Current <sup>(5)</sup> | Sourcing, $V_O$ to $V^-$<br>$V_{IN}(\text{diff}) = 100\text{ mV}$               | 5<br><b>4</b> | 11         |                   | mA                        |
|        |                               | Sinking, $V_O$ to $V^+$<br>$V_{IN}(\text{diff}) = -100\text{ mV}$               | 5<br><b>4</b> | 12         |                   |                           |
| $I_S$  | Supply Current                | $V_{CM} = 0.3\text{V}$                                                          |               | 346        | 400<br><b>600</b> | nA                        |
|        |                               | $V_{CM} = 3\text{V}$                                                            |               | 471        | 600<br><b>860</b> |                           |

(5) The short circuit test is a momentary open loop test.

### 3.3V AC Electrical Characteristics<sup>(1)</sup>

Unless otherwise is specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 3.3\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V_O = V^+/2$ , and  $R_L > 1\text{M}\Omega$ .

**Boldface** limits apply at the temperature extremes.

| Symbol     | Parameter                            | Conditions                                           | Min<br>(2) | Typ<br>(3) | Max<br>(2) | Units                        |
|------------|--------------------------------------|------------------------------------------------------|------------|------------|------------|------------------------------|
| GBW        | Gain-Bandwidth Product               | $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$    |            | 6.2        |            | kHz                          |
| SR         | Slew Rate                            | $A_V = +1$ ,<br>$V_{IN} = 0\text{V to } 3.3\text{V}$ |            | 2.9        |            | V/ms                         |
|            |                                      | Falling Edge<br>Rising Edge                          |            | 2.5        |            |                              |
| $\theta_m$ | Phase Margin                         | $C_L = 20\text{ pF}$ , $R_L = 10\text{ k}\Omega$     |            | 73         |            | deg                          |
| $G_m$      | Gain Margin                          | $C_L = 20\text{ pF}$ , $R_L = 10\text{ k}\Omega$     |            | 19         |            | dB                           |
| $e_n$      | Input-Referred Voltage Noise Density | $f = 100\text{ Hz}$                                  |            | 259        |            | $\text{nV}/\sqrt{\text{Hz}}$ |
|            | Input-Referred Voltage Noise         | 0.1 Hz to 10 Hz                                      |            | 22         |            | $\mu\text{V}_{PP}$           |
| $i_n$      | Input-Referred Current Noise         | $f = 100\text{ Hz}$                                  |            | 100        |            | $\text{fA}/\sqrt{\text{Hz}}$ |

- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that  $T_J = T_A$ . No guarantee of parametric performance is indicated in the electrical tables under conditions of internal self-heating where  $T_J > T_A$ . Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) All limits are guaranteed by testing, statistical analysis or design.
- (3) Typical values represent the most likely parametric norm at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.

### 5V DC Electrical Characteristics<sup>(1)</sup>

Unless otherwise specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V_O = V^+/2$ , and  $R_L > 1\text{M}\Omega$ . **Boldface** limits apply at the temperature extremes.

| Symbol   | Parameter            | Conditions             | Min<br>(2) | Typ<br>(3) | Max<br>(2)                                | Units |
|----------|----------------------|------------------------|------------|------------|-------------------------------------------|-------|
| $V_{OS}$ | Input Offset Voltage | $V_{CM} = 0.3\text{V}$ |            | 0.1        | $\pm 1.0$<br><b><math>\pm 1.23</math></b> | mV    |
|          |                      | $V_{CM} = 4.7\text{V}$ |            | 0.1        | $\pm 1.0$<br><b><math>\pm 1.23</math></b> |       |

- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that  $T_J = T_A$ . No guarantee of parametric performance is indicated in the electrical tables under conditions of internal self-heating where  $T_J > T_A$ . Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) All limits are guaranteed by testing, statistical analysis or design.
- (3) Typical values represent the most likely parametric norm at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.

## 5V DC Electrical Characteristics<sup>(1)</sup> (continued)

Unless otherwise specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_L > 1\text{M}\Omega$ . **Boldface** limits apply at the temperature extremes.

| Symbol                   | Parameter                                 | Conditions                                                                             | Min<br>(2)       | Typ<br>(3) | Max<br>(2)                            | Units                        |
|--------------------------|-------------------------------------------|----------------------------------------------------------------------------------------|------------------|------------|---------------------------------------|------------------------------|
| $\text{TCV}_{\text{OS}}$ | Input Offset Voltage Drift <sup>(4)</sup> |                                                                                        |                  | $\pm 0.4$  | <b><math>\pm 3.5</math></b>           | $\mu\text{V}/^\circ\text{C}$ |
| $I_{\text{BIAS}}$        | Input Bias Current                        |                                                                                        |                  | 0.04       | $\pm 1$<br><b><math>\pm 50</math></b> | pA                           |
| $I_{\text{OS}}$          | Input Offset Current                      |                                                                                        |                  | 60         |                                       | fA                           |
| CMRR                     | Common Mode Rejection Ratio               | $0\text{V} \leq V_{\text{CM}} \leq 5.0\text{V}$                                        | 75<br><b>74</b>  | 102        |                                       | dB                           |
|                          |                                           | $0\text{V} \leq V_{\text{CM}} \leq 3.9\text{V}$                                        | 84<br><b>80</b>  | 108        |                                       |                              |
|                          |                                           | $4.4\text{V} \leq V_{\text{CM}} \leq 5.0\text{V}$                                      | 77<br><b>76</b>  | 115        |                                       |                              |
| PSRR                     | Power Supply Rejection Ratio              | $1.6\text{V} \leq V^+ \leq 5.5\text{V}$<br>$V_{\text{CM}} = 0.3\text{V}$               | 85<br><b>76</b>  | 109        |                                       | dB                           |
| CMVR                     | Common Mode Voltage Range                 | CMRR $\geq 75$ dB<br>CMRR $\geq 74$ dB                                                 | -0.1<br><b>0</b> |            | 5.1<br><b>5</b>                       | V                            |
| $A_{\text{VOL}}$         | Large Signal Voltage Gain                 | $V_O = 0.5\text{V}$ to $4.5\text{V}$<br>$R_L = 100\text{ k}\Omega$ to $V^+/2$          | 84<br><b>76</b>  | 132        |                                       | dB                           |
| $V_O$                    | Output Swing High                         | $R_L = 100\text{ k}\Omega$ to $V^+/2$<br>$V_{\text{IN}}(\text{diff}) = 100\text{ mV}$  |                  | 3          | 50<br><b>50</b>                       | mV from either rail          |
|                          | Output Swing Low                          | $R_L = 100\text{ k}\Omega$ to $V^+/2$<br>$V_{\text{IN}}(\text{diff}) = -100\text{ mV}$ |                  | 3          | 50<br><b>50</b>                       |                              |
| $I_O$                    | Output Current <sup>(5)</sup>             | Sourcing, $V_O$ to $V^-$<br>$V_{\text{IN}}(\text{diff}) = 100\text{ mV}$               | 15<br><b>8</b>   | 23         |                                       | mA                           |
|                          |                                           | Sinking, $V_O$ to $V^+$<br>$V_{\text{IN}}(\text{diff}) = -100\text{ mV}$               | 15<br><b>8</b>   | 22         |                                       |                              |
| $I_S$                    | Supply Current                            | $V_{\text{CM}} = 0.3\text{V}$                                                          |                  | 351        | 400<br><b>620</b>                     | nA                           |
|                          |                                           | $V_{\text{CM}} = 4.7\text{V}$                                                          |                  | 475        | 600<br><b>870</b>                     |                              |

(4) The offset voltage average drift is determined by dividing the change in  $V_{\text{OS}}$  at the temperature extremes by the total temperature change.

(5) The short circuit test is a momentary open loop test.

## 5V AC Electrical Characteristics<sup>(1)</sup>

Unless otherwise specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_L > 1\text{M}\Omega$ . **Boldface** limits apply at the temperature extremes.

| Symbol     | Parameter              | Conditions                                                 | Min<br>(2)   | Typ<br>(3)        | Max<br>(2) | Units |
|------------|------------------------|------------------------------------------------------------|--------------|-------------------|------------|-------|
| GBW        | Gain-Bandwidth Product | $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$          |              | 6.2               |            | kHz   |
| SR         | Slew Rate              | $A_V = +1$ ,<br>$V_{\text{IN}} = 0\text{V}$ to $5\text{V}$ | Falling Edge | 1.1<br><b>1.2</b> | 2.7        | V/ms  |
|            |                        |                                                            | Rising Edge  | 1.1<br><b>1.2</b> | 2.4        |       |
| $\theta_m$ | Phase Margin           | $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$          |              | 73                |            | deg   |
| $G_m$      | Gain Margin            | $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$          |              | 20                |            | dB    |

(1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that  $T_J = T_A$ . No guarantee of parametric performance is indicated in the electrical tables under conditions of internal self-heating where  $T_J > T_A$ . Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.

(2) All limits are guaranteed by testing, statistical analysis or design.

(3) Typical values represent the most likely parametric norm at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.


## 5V AC Electrical Characteristics<sup>(1)</sup> (continued)

Unless otherwise specified, all limits guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_L > 1\text{M}\Omega$ . **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter                                                           | Conditions                                                                              | Min<br>(2) | Typ<br>(3) | Max<br>(2) | Units                        |
|--------|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------|------------|------------|------------|------------------------------|
| $e_n$  | Input-Referred Voltage Noise Density                                | $f = 100\text{ Hz}$                                                                     |            | 255        |            | $\text{nV}/\sqrt{\text{Hz}}$ |
|        | Input-Referred Voltage Noise                                        | $0.1\text{ Hz to }10\text{ Hz}$                                                         |            | 22         |            | $\mu\text{V}_{\text{PP}}$    |
| $i_n$  | Input-Referred Current Noise                                        | $f = 100\text{ Hz}$                                                                     |            | 100        |            | $\text{fA}/\sqrt{\text{Hz}}$ |
| EMIRR  | EMI Rejection Ratio, $\text{IN}^+$ and $\text{IN}^-$ <sup>(4)</sup> | $V_{\text{RF\_PEAK}} = 100\text{ mV}_P$ ( $-20\text{ dB}_P$ ),<br>$f = 400\text{ MHz}$  |            | 121        |            | dB                           |
|        |                                                                     | $V_{\text{RF\_PEAK}} = 100\text{ mV}_P$ ( $-20\text{ dB}_P$ ),<br>$f = 900\text{ MHz}$  |            | 121        |            |                              |
|        |                                                                     | $V_{\text{RF\_PEAK}} = 100\text{ mV}_P$ ( $-20\text{ dB}_P$ ),<br>$f = 1800\text{ MHz}$ |            | 124        |            |                              |
|        |                                                                     | $V_{\text{RF\_PEAK}} = 100\text{ mV}_P$ ( $-20\text{ dB}_P$ ),<br>$f = 2400\text{ MHz}$ |            | 142        |            |                              |

(4) The EMI Rejection Ratio is defined as  $\text{EMIRR} = 20\log(V_{\text{RF\_PEAK}}/\Delta V_{\text{OS}})$ .

### CONNECTION DIAGRAM

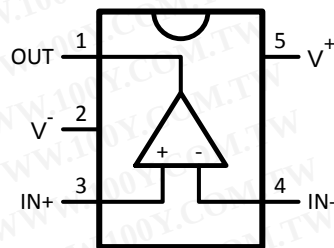

**Figure 1. 5-Pin SC70  
Top View**



## Typical Performance Characteristics

At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

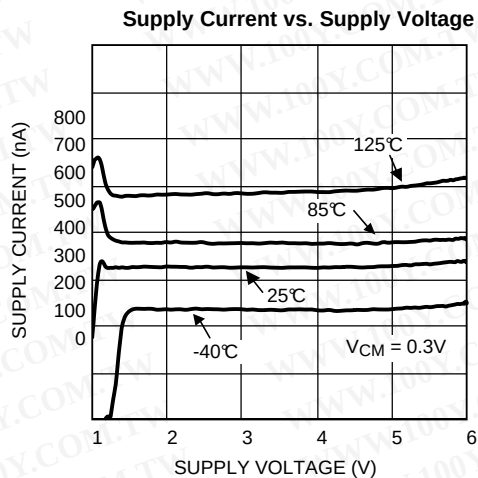


Figure 2.

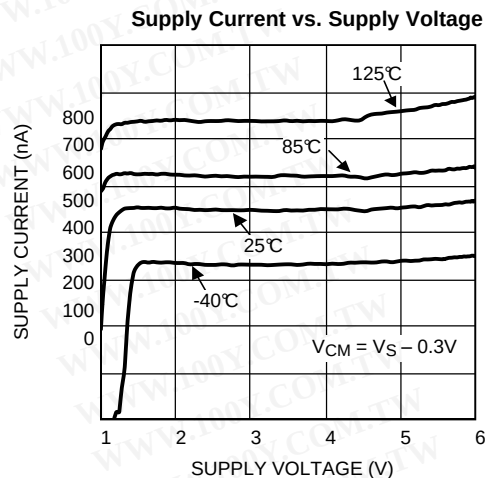


Figure 3.

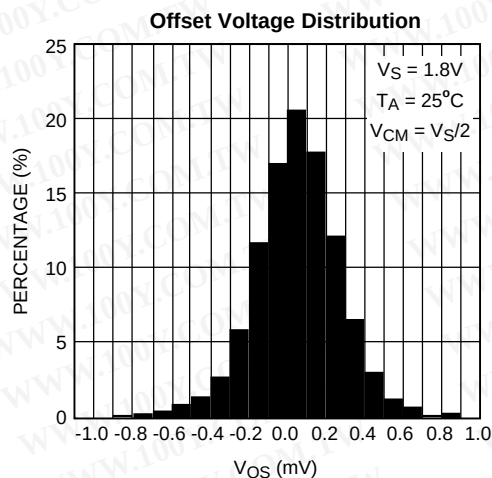


Figure 4.

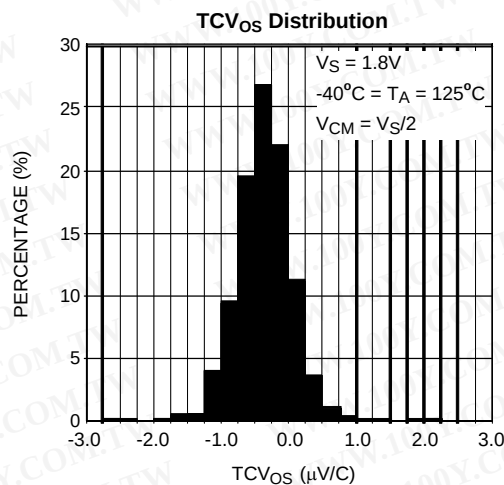


Figure 5.

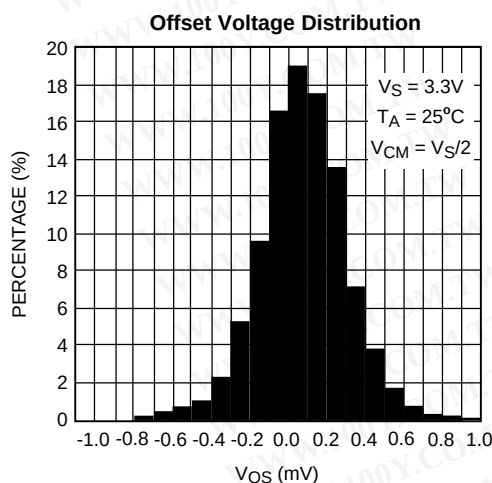


Figure 6.

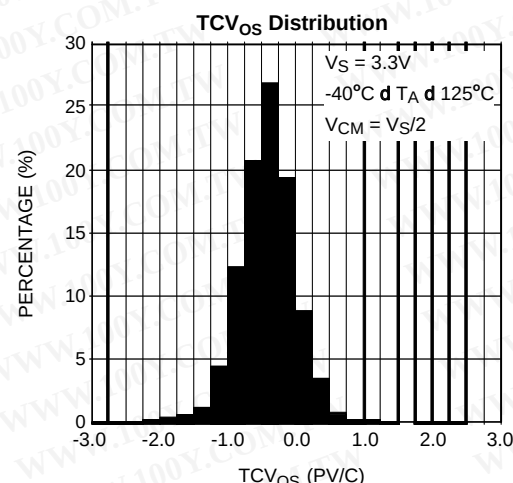



Figure 7.



## Typical Performance Characteristics (continued)


At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

**Offset Voltage Distribution**

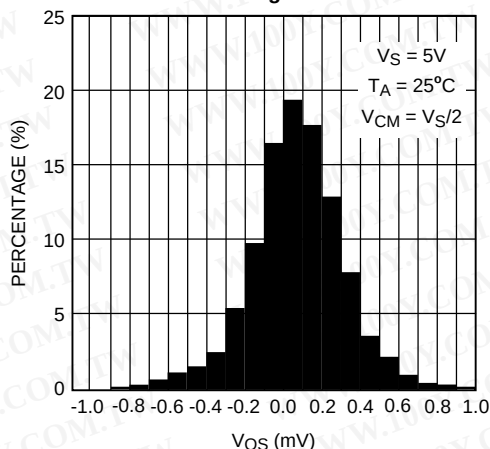


**Figure 8.**

**TCV<sub>OS</sub> Distribution**

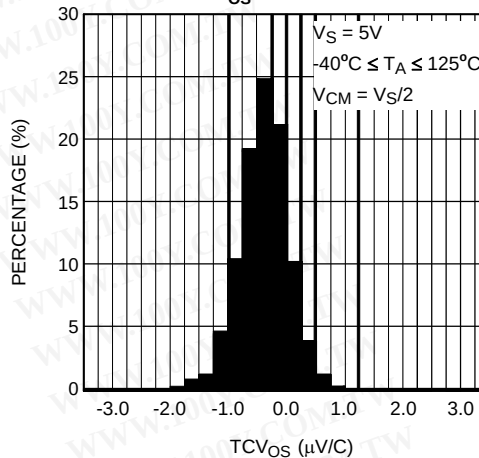


**Figure 9.**

**Input Offset Voltage vs. Input Common Mode**

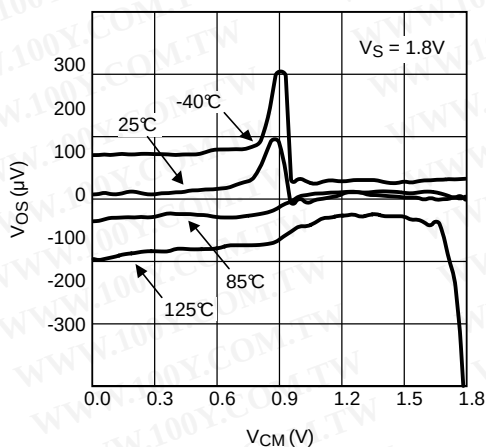


**Figure 10.**

**Input Offset Voltage vs. Input Common Mode**

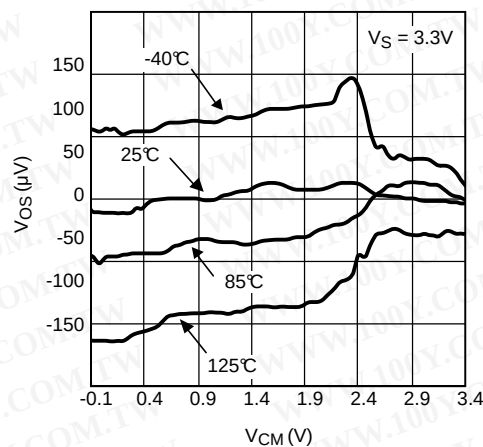


**Figure 11.**

**Input Offset Voltage vs. Input Common Mode**

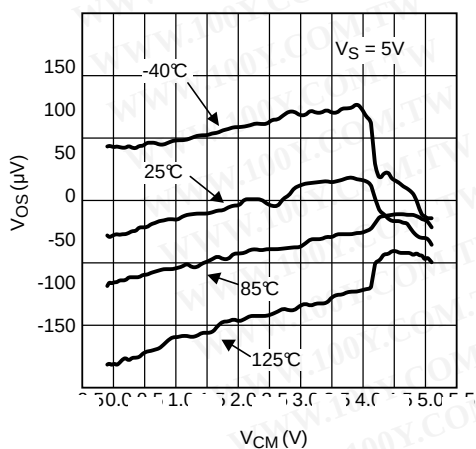

**Figure 12.**

**Input Offset Voltage vs. Supply Voltage**

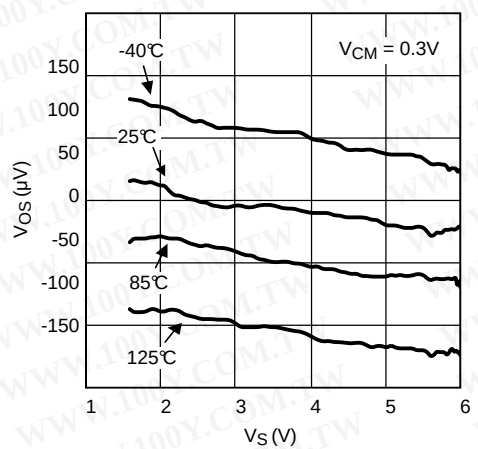


**Figure 13.**

## Typical Performance Characteristics (continued)


At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

**Input Offset Voltage vs. Supply Voltage**

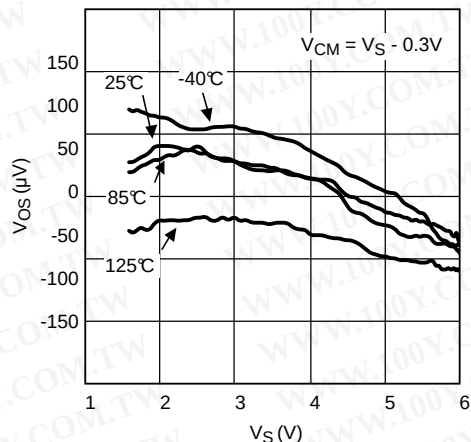


**Figure 14.**

**Input Offset Voltage vs. Output Voltage**

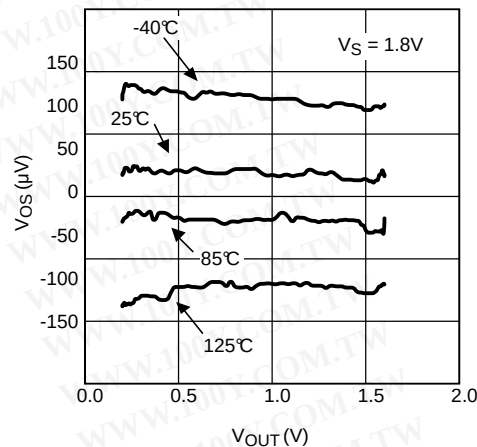


**Figure 15.**

**Input Offset Voltage vs. Output Voltage**

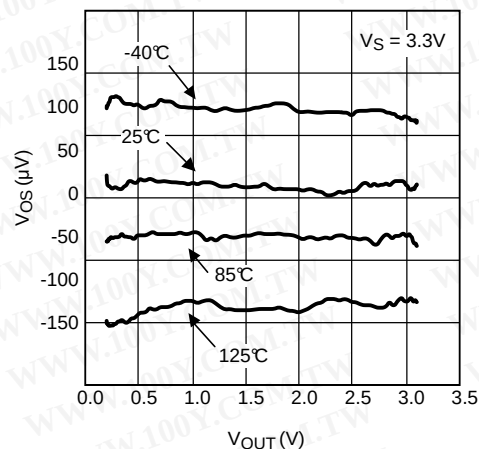


**Figure 16.**

**Input Offset Voltage vs. Output Voltage**

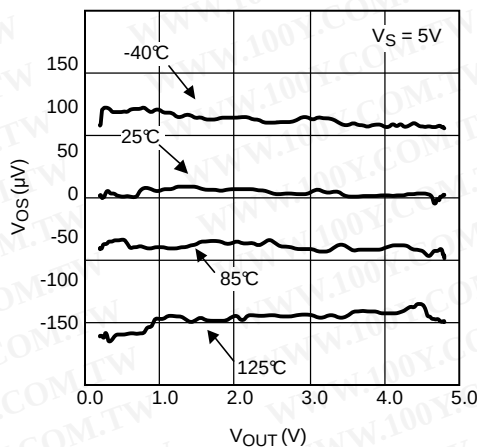


**Figure 17.**

**Input Offset Voltage vs. Sourcing Current**

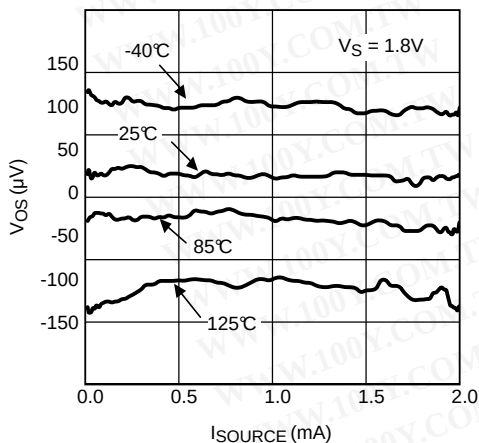

**Figure 18.**

**Input Offset Voltage vs. Sourcing Current**

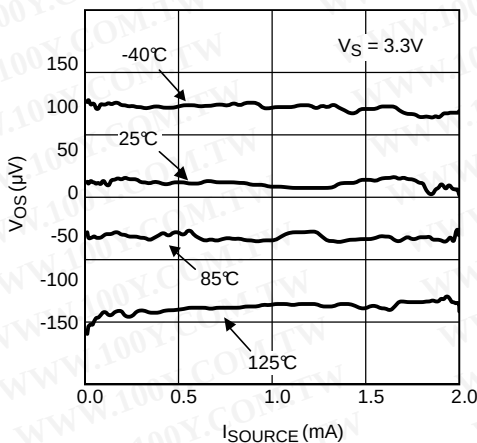


**Figure 19.**

## Typical Performance Characteristics (continued)


At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

**Input Offset Voltage vs. Sourcing Current**

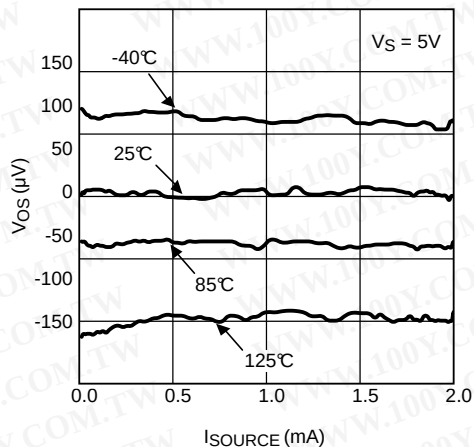


**Figure 20.**

**Input Offset Voltage vs. Sinking Current**

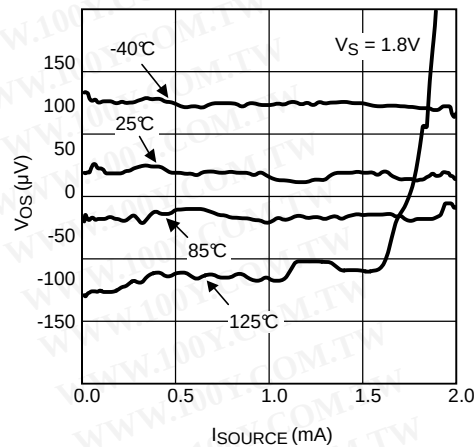


**Figure 21.**

**Input Offset Voltage vs. Sinking Current**

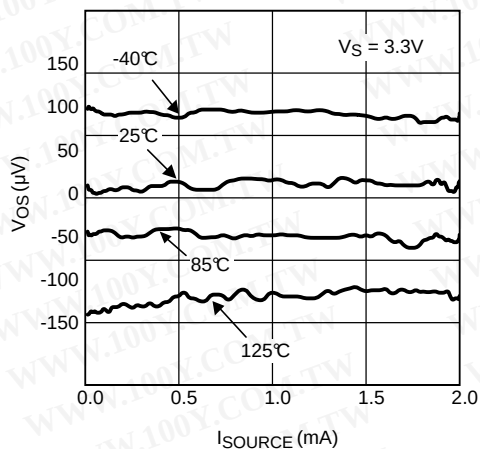


**Figure 22.**

**Input Offset Voltage vs. Sinking Current**

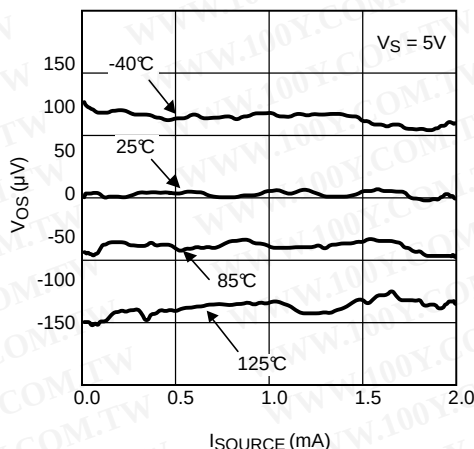


**Figure 23.**

**Sourcing Current vs. Output Voltage**

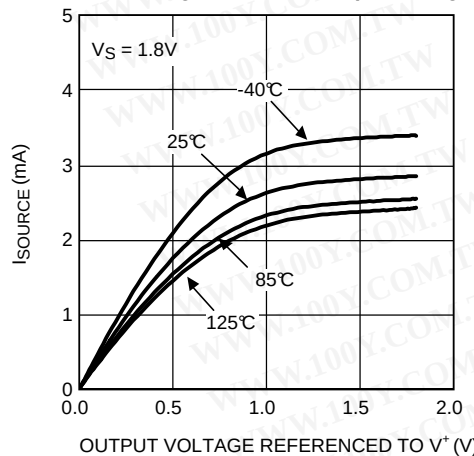

**Figure 24.**

**Sinking Current vs. Output Voltage**

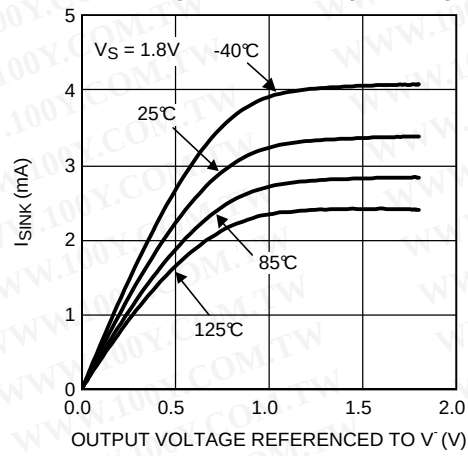

**Figure 25.**

## Typical Performance Characteristics (continued)

At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

**Sourcing Current vs. Output Voltage**

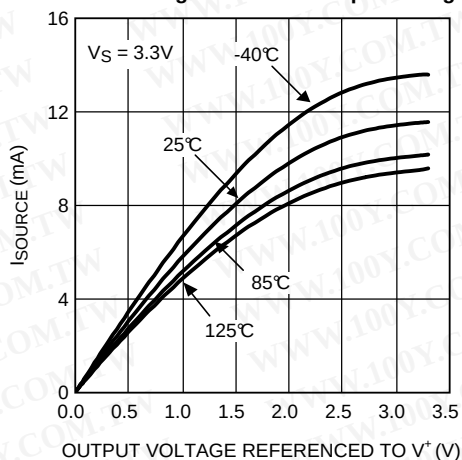


Figure 26.

**Sinking Current vs. Output Voltage**

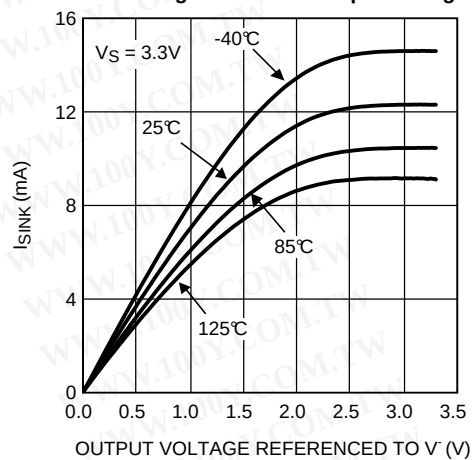


Figure 27.

**Sourcing Current vs. Output Voltage**

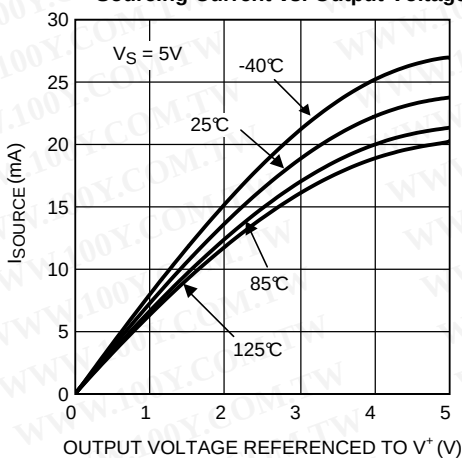


Figure 28.

**Sinking Current vs. Output Voltage**

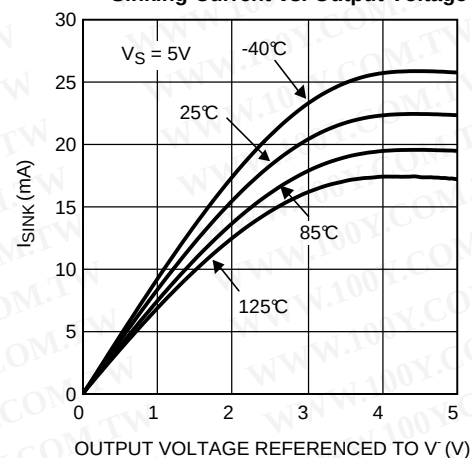


Figure 29.

**Sourcing Current vs. Supply Voltage**

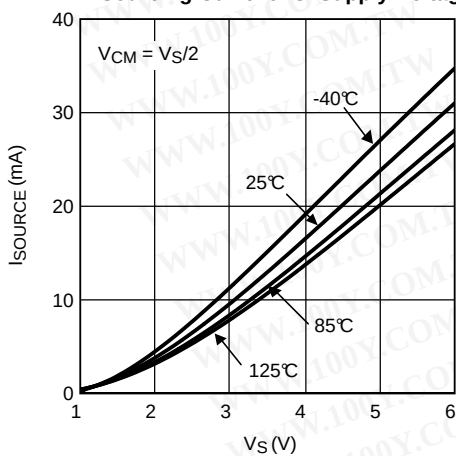


Figure 30.

**Sinking Current vs. Supply Voltage**

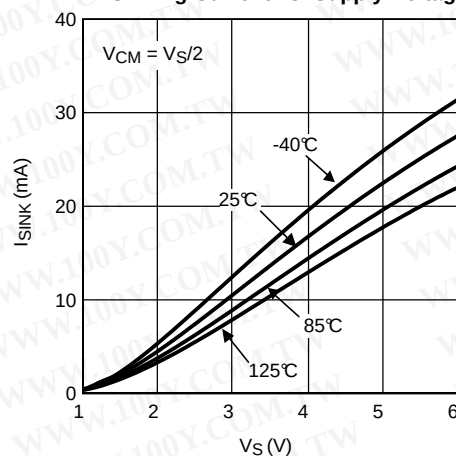


Figure 31.



## Typical Performance Characteristics (continued)

At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

Output Swing High vs. Supply Voltage

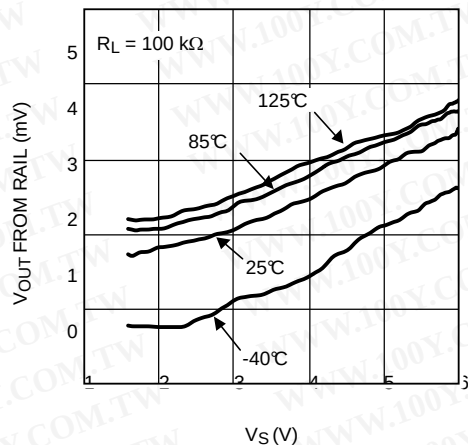


Figure 32.

Output Swing Low vs. Supply Voltage

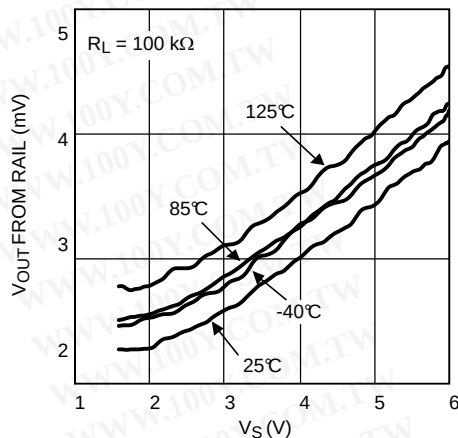


Figure 33.

Input Bias Current vs. Common Mode Voltage

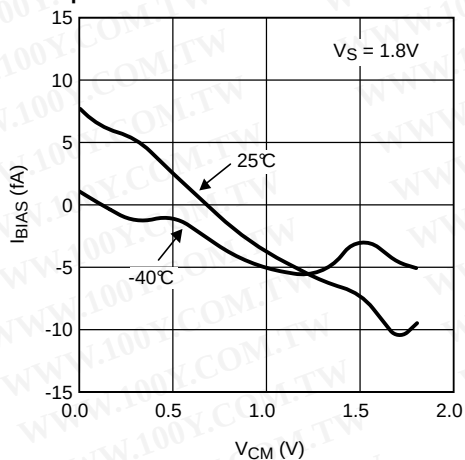


Figure 34.

Input Bias Current vs. Common Mode Voltage

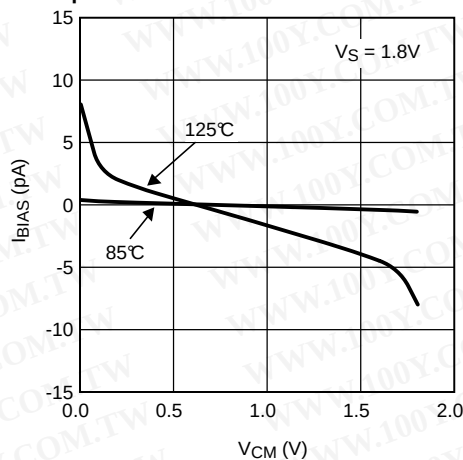


Figure 35.

Input Bias Current vs. Common Mode Voltage

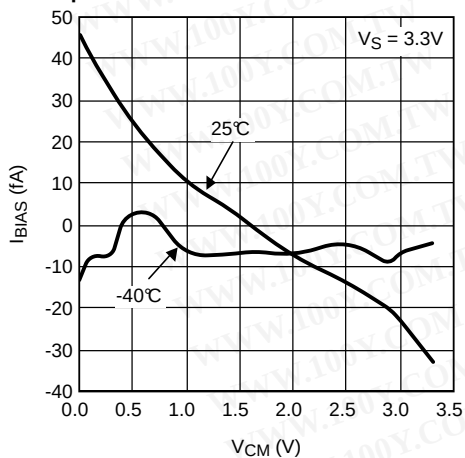


Figure 36.

Input Bias Current vs. Common Mode Voltage

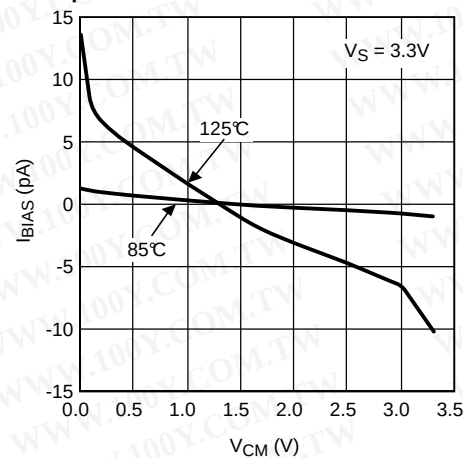


Figure 37.

## Typical Performance Characteristics (continued)

At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

**Input Bias Current vs. Common Mode Voltage**

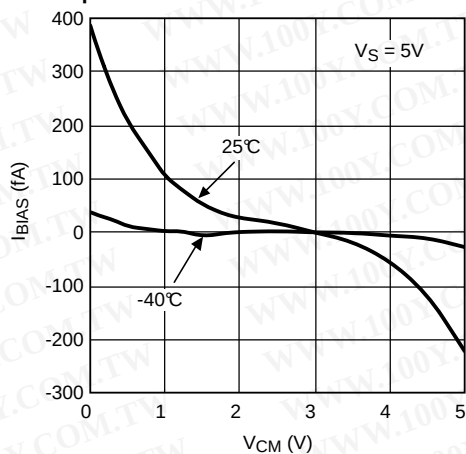


Figure 38.

**Input Bias Current vs. Common Mode Voltage**

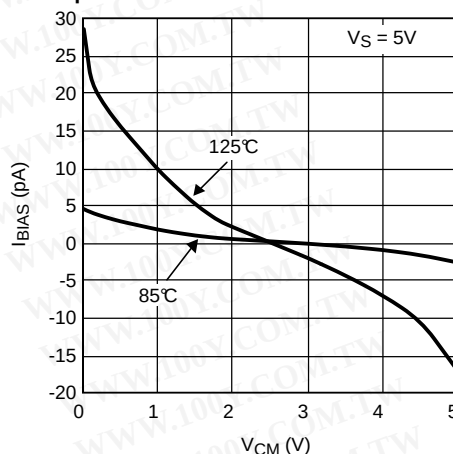


Figure 39.

**PSRR vs. Frequency**

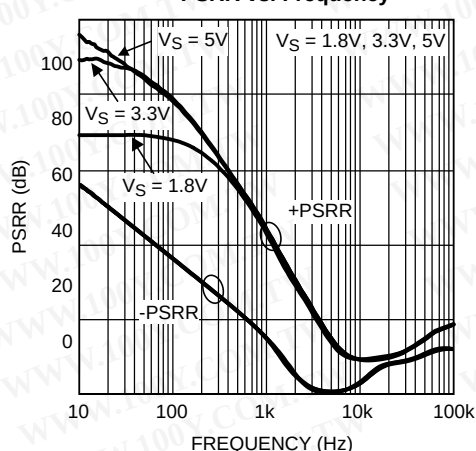


Figure 40.

**CMRR vs. Frequency**

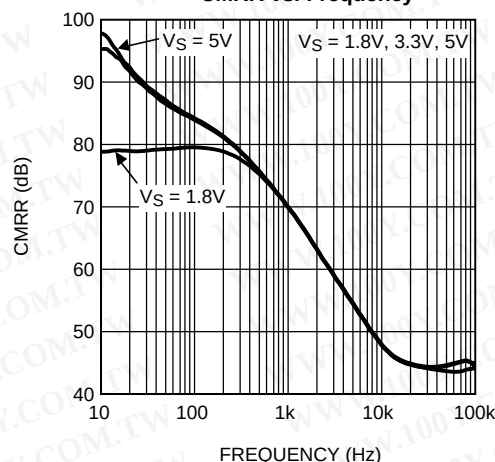


Figure 41.

**Frequency Response vs. Temperature**

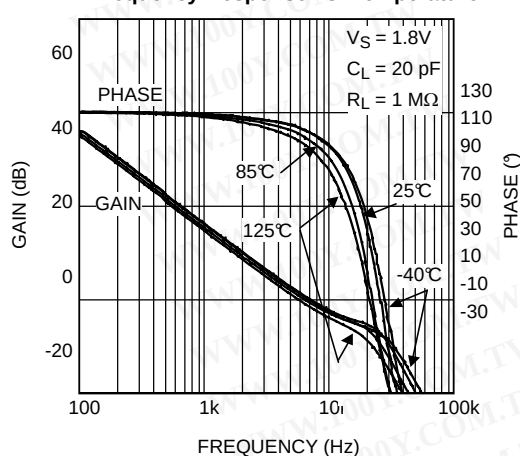


Figure 42.

**Frequency Response vs. Temperature**

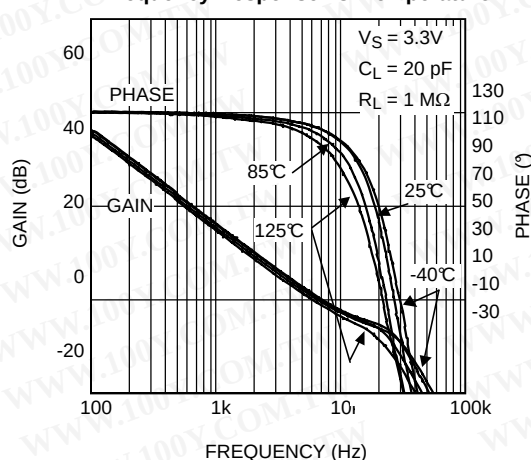


Figure 43.

## Typical Performance Characteristics (continued)

At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

Frequency Response vs. Temperature

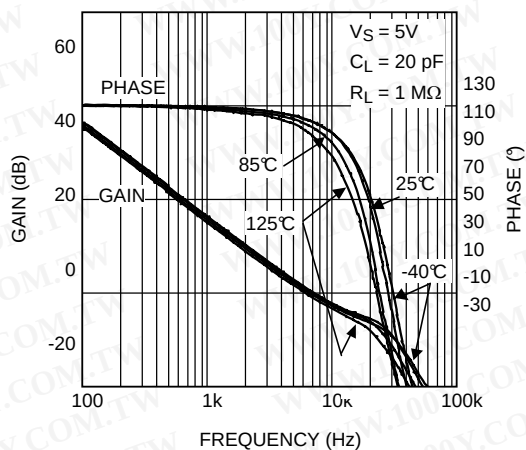


Figure 44.

Frequency Response vs.  $R_L$

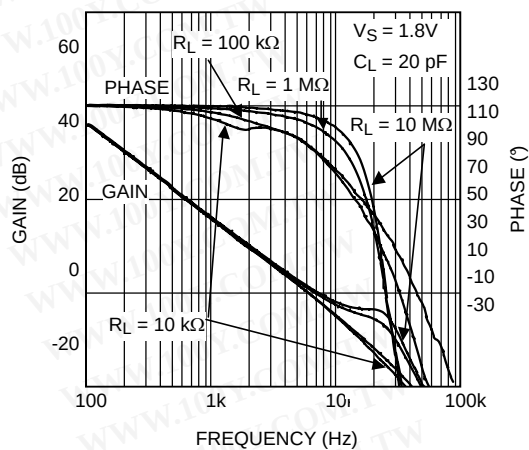


Figure 45.

Frequency Response vs.  $R_L$

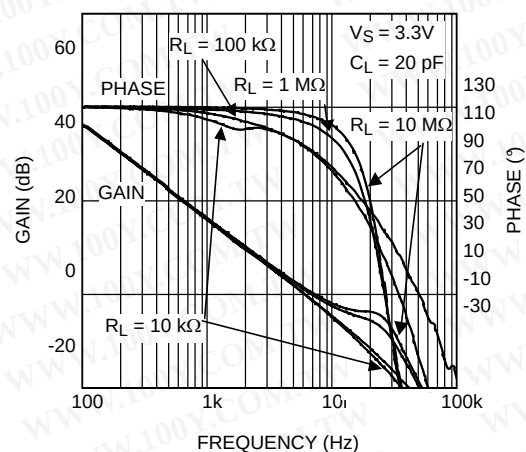


Figure 46.

Frequency Response vs.  $R_L$

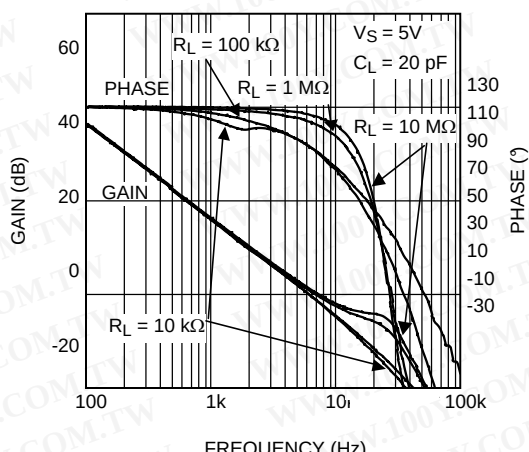


Figure 47.

Frequency Response vs.  $C_L$

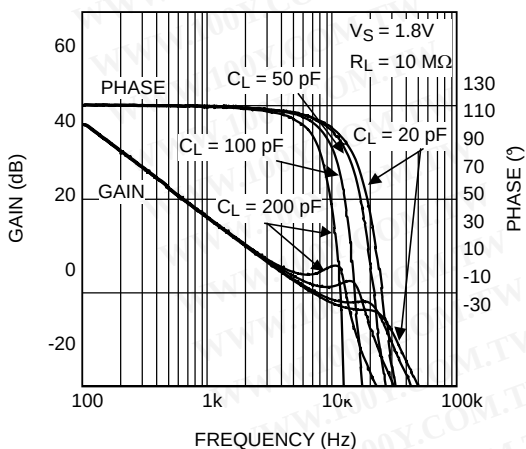


Figure 48.

Frequency Response vs.  $C_L$

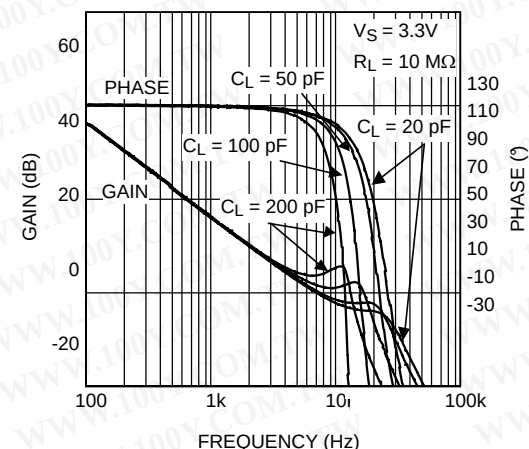


Figure 49.

## Typical Performance Characteristics (continued)

At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

**Frequency Response vs.  $C_L$**

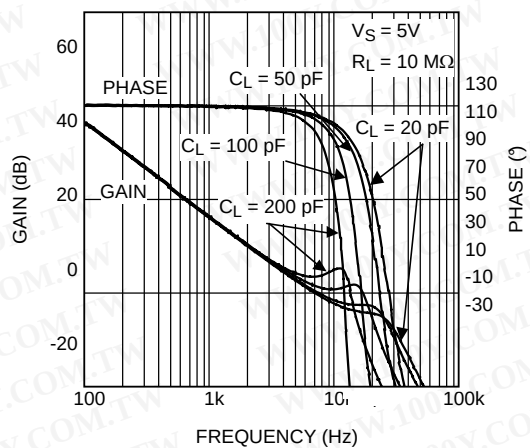


Figure 50.

**Slew Rate vs. Supply Voltage**

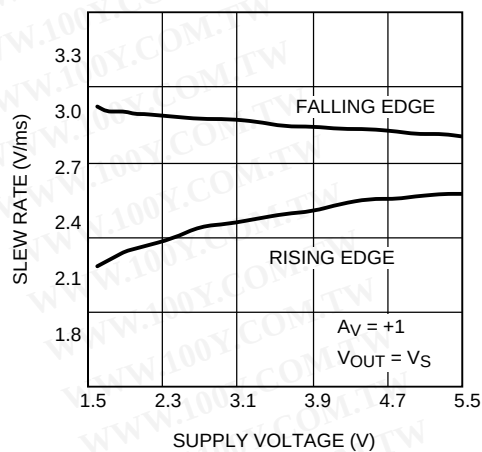


Figure 51.

**Voltage Noise vs. Frequency**

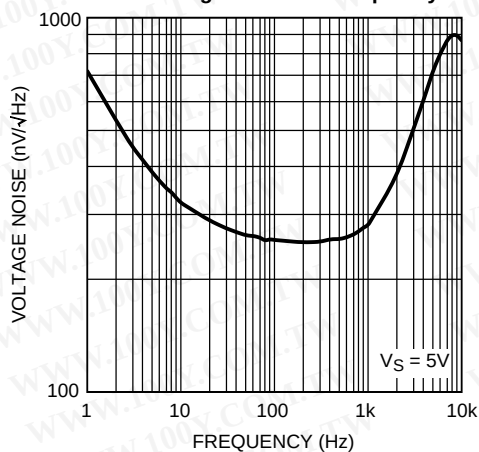


Figure 52.

**0.1 to 10 Hz Time Domain Voltage Noise**

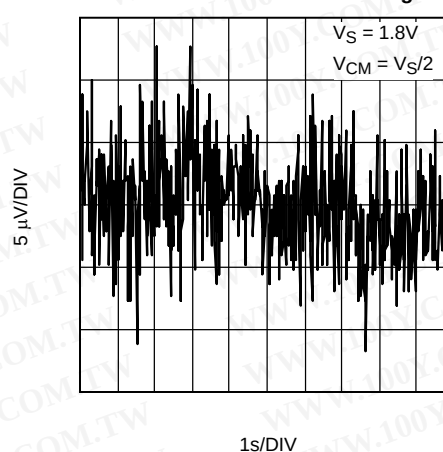


Figure 53.

**0.1 to 10 Hz Time Domain Voltage Noise**

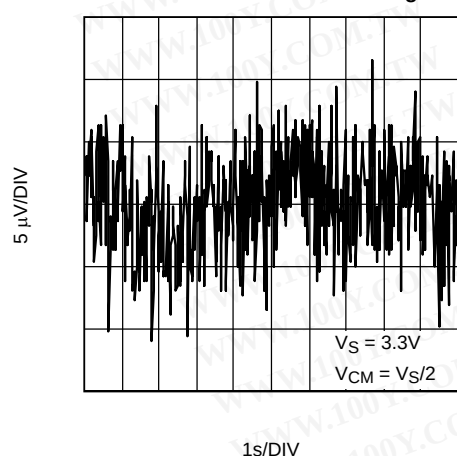


Figure 54.

**0.1 to 10 Hz Time Domain Voltage Noise**

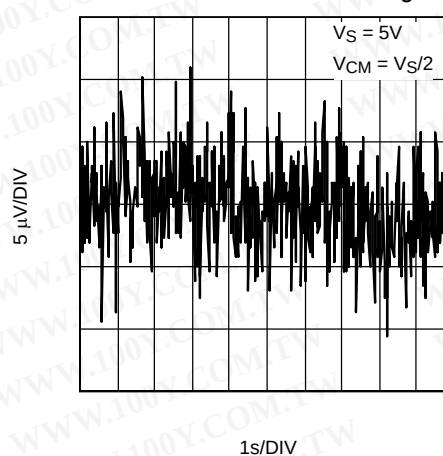



Figure 55.



## Typical Performance Characteristics (continued)


At  $T_J = 25^\circ\text{C}$ , unless otherwise specified.

**Small Signal Pulse Response**

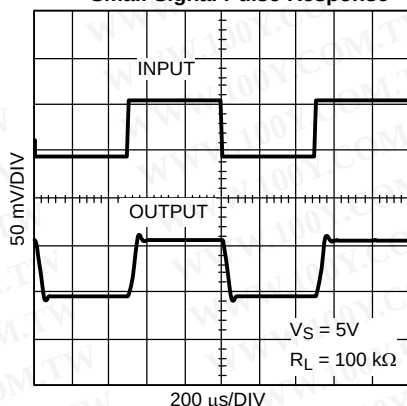


**Figure 56.**

**Small Signal Pulse Response**

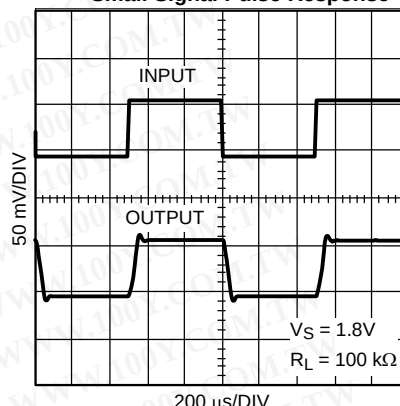


**Figure 57.**

**Large Signal Pulse Response**

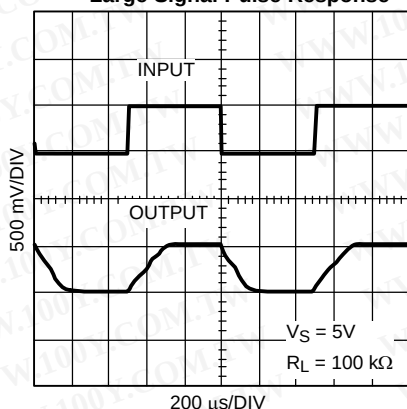


**Figure 58.**

**Large Signal Pulse Response**

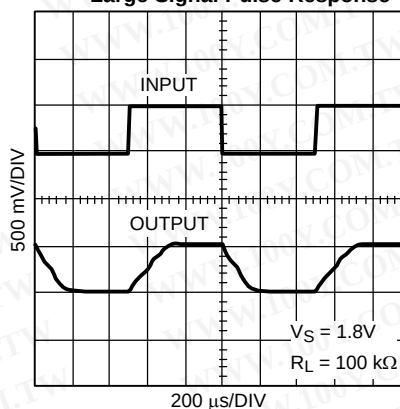


**Figure 59.**

**Overload Recovery Waveform**

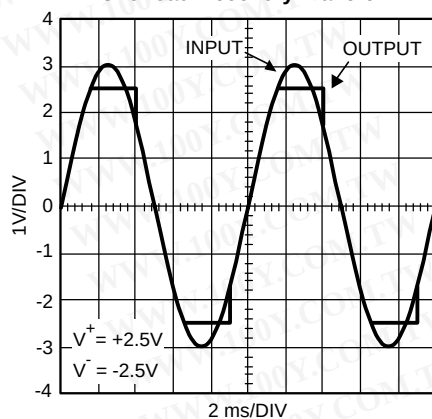

**Figure 60.**

**EMIRR vs. Frequency**

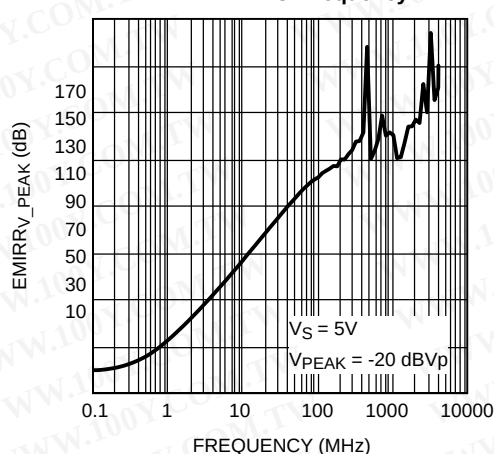

**Figure 61.**

## APPLICATION INFORMATION

The LPV521 is fabricated with Texas Instruments' state-of-the-art VIP50 process. This proprietary process dramatically improves the performance of Texas Instruments' low-power and low-voltage operational amplifiers. The following sections showcase the advantages of the VIP50 process and highlight circuits which enable ultra-low power consumption.

### 60 HZ TWIN T NOTCH FILTER

Small signals from transducers in remote and distributed sensing applications commonly suffer strong 60 Hz interference from AC power lines. The circuit of [Figure 62](#) notches out the 60 Hz and provides a gain  $A_V = 2$  for the sensor signal represented by a 1 kHz sine wave. Similar stages may be cascaded to remove 2<sup>nd</sup> and 3<sup>rd</sup> harmonics of 60 Hz. Thanks to the nA power consumption of the LPV521, even 5 such circuits can run for 9.5 years from a small CR2032 lithium cell. These batteries have a nominal voltage of 3V and an end of life voltage of 2V. With an operating voltage from 1.6V to 5.5V the LPV521 can function over this voltage range.

The notch frequency is set by  $F_0 = 1/2\pi RC$ . To achieve a 60 Hz notch use  $R = 10\text{ M}\Omega$  and  $C = 270\text{ pF}$ . If eliminating 50 Hz noise, which is common in European systems, use  $R = 11.8\text{ M}\Omega$  and  $C = 270\text{ pF}$ .

The Twin T Notch Filter works by having two separate paths from  $V_{IN}$  to the amplifier's input. A low frequency path through the resistors  $R - R$  and another separate high frequency path through the capacitors  $C - C$ . However, at frequencies around the notch frequency, the two paths have opposing phase angles and the two signals will tend to cancel at the amplifier's input.

To ensure that the target center frequency is achieved and to maximize the notch depth (Q factor) the filter needs to be as balanced as possible. To obtain circuit balance, while overcoming limitations of available standard resistor and capacitor values, use passives in parallel to achieve the  $2C$  and  $R/2$  circuit requirements for the filter components that connect to ground.

To make sure passive component values stay as expected clean board with alcohol, rinse with deionized water, and air dry. Make sure board remains in a relatively low humidity environment to minimize moisture which may increase the conductivity of board components. Also large resistors come with considerable parasitic stray capacitance which effects can be reduced by cutting out the ground plane below components of concern.

Large resistors are used in the feedback network to minimize battery drain. When designing with large resistors, resistor thermal noise, op amp current noise, as well as op amp voltage noise, must be considered in the noise analysis of the circuit. The noise analysis for the circuit in [Figure 62](#) can be done over a bandwidth of 5 kHz, which takes the conservative approach of overestimating the bandwidth (LPV521 typical  $GBW/A_V$  is lower). The total noise at the output is approximately 800  $\mu\text{Vpp}$ , which is excellent considering the total consumption of the circuit is only 540 nA. The dominant noise terms are op amp voltage noise (550  $\mu\text{Vpp}$ ), current noise through the feedback network (430  $\mu\text{Vpp}$ ), and current noise through the notch filter network (280  $\mu\text{Vpp}$ ). Thus the total circuit's noise is below 1/2 LSB of a 10 bit system with a 2 V reference, which is 1 mV.

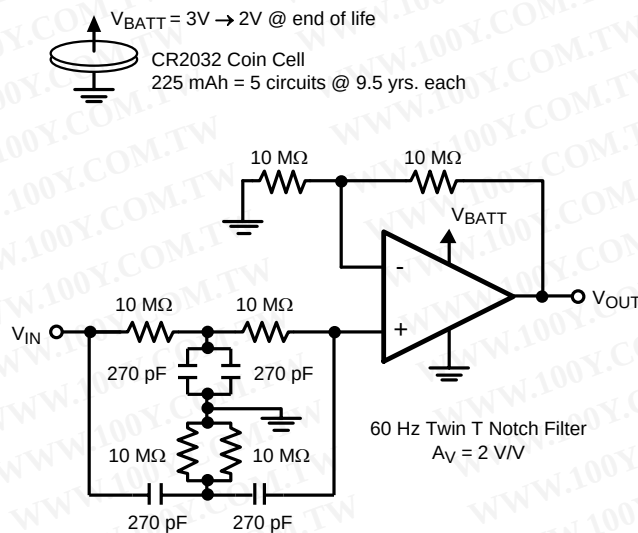


Figure 62. 60 Hz Notch Filter

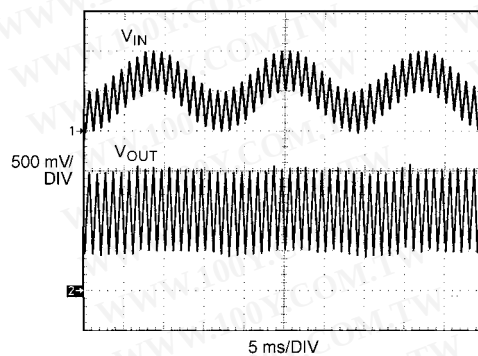


Figure 63. 60 Hz Notch Filter Waveform

## BATTERY CURRENT SENSING

The rail-to-rail common mode input range and the very low quiescent current make the LPV521 ideal to use in high side and low side battery current sensing applications. The high side current sensing circuit in Figure 64 is commonly used in a battery charger to monitor the charging current in order to prevent over charging. A sense resistor  $R_{SENSE}$  is connected in series with the battery. The theoretical output voltage of the circuit is  $V_{OUT} = [(R_{SENSE} \times R_3) / R_1] \times I_{CHARGE}$ . In reality, however, due to the finite Current Gain,  $\beta$ , of the transistor the current that travels through  $R_3$  will not be  $I_{CHARGE}$ , but instead, will be  $\alpha \times I_{CHARGE}$  or  $\beta / (\beta + 1) \times I_{CHARGE}$ . A Darlington pair can be used to increase the  $\beta$  and performance of the measuring circuit. Using the components shown in Figure 64 will result in  $V_{OUT} \approx 4000 \Omega \times I_{CHARGE}$ . This is ideal to amplify a 1 mA  $I_{CHARGE}$  to near full scale of an ADC with  $V_{REF}$  at 4.1V. A resistor,  $R_2$  is used at the non-inverting input of the amplifier, with the same value as  $R_1$  to minimize offset voltage. Selecting values per Figure 64 will limit the current traveling through the  $R_1 - Q1 - R_3$  leg of the circuit to under 1  $\mu A$  which is on the same order as the LPV521 supply current. Increasing resistors  $R_1$ ,  $R_2$ , and  $R_3$  will decrease the measuring circuit supply current and extend battery life. Decreasing  $R_{SENSE}$  will minimize error due to resistor tolerance, however, this will also decrease  $V_{SENSE} = I_{CHARGE} \times R_{SENSE}$ , and in turn the amplifier offset voltage will have a more significant contribution to the total error of the circuit. With the components shown in Figure 64 the measurement circuit supply current can be kept below 1.5  $\mu A$  and measure 100  $\mu A$  to 1 mA..

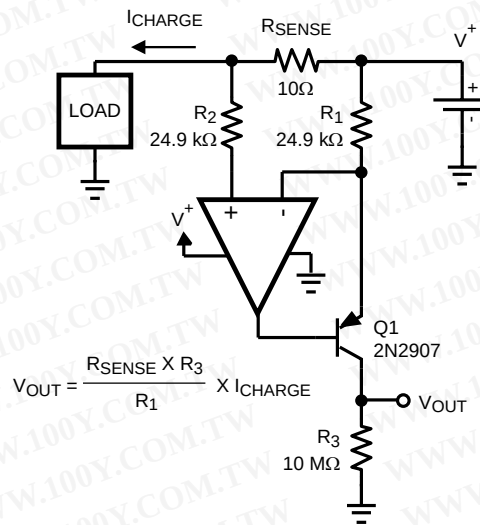


Figure 64. High Side Current Sensing

## PORTABLE GAS DETECTION SENSOR

Gas sensors are used in many different industrial and medical applications. They generate a current which is proportional to the percentage of a particular gas sensed in an air sample. This current goes through a load resistor and the resulting voltage drop is measured. Depending on the sensed gas and sensitivity of the sensor, the output current can be in the order of tens of microamperes to a few milliamperes. Gas sensor datasheets often specify a recommended load resistor value or they suggest a range of load resistors to choose from.

Oxygen sensors are used when air quality or oxygen delivered to a patient needs to be monitored. Fresh air contains 20.9% oxygen. Air samples containing less than 18% oxygen are considered dangerous. Oxygen sensors are also used in industrial applications where the environment must lack oxygen. An example is when food is vacuum packed. There are two main categories of oxygen sensors, those which sense oxygen when it is abundantly present (i.e. in air or near an oxygen tank) and those which detect traces of oxygen in ppm.

Figure 65 shows a typical circuit used to amplify the output of an oxygen detector. The LPV521 makes an excellent choice for this application as it only draws 345 nA of current and operates on supply voltages down to 1.6V. This application detects oxygen in air. The oxygen sensor outputs a known current through the load resistor. This value changes with the amount of oxygen present in the air sample. Oxygen sensors usually recommend a particular load resistor value or specify a range of acceptable values for the load resistor. Oxygen sensors typically have a life of one to two years. The use of the nanopower LPV521 means minimal power usage by the op amp and it enhances the battery life. With the components shown in Figure 65 the circuit can consume less than 0.5  $\mu$ A of current ensuring that even batteries used in compact portable electronics, with low mAh charge ratings, could last beyond the life of the oxygen sensor. The precision specifications of the LPV521, such as its very low offset voltage, low  $TCV_{OS}$ , low input bias current, high CMRR, and high PSRR are other factors which make the LPV521 a great choice for this application.



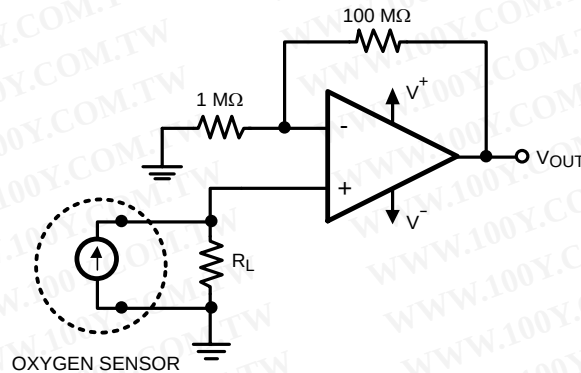


Figure 65. Precision Oxygen Sensor

## INPUT STAGE

The LPV521 has a rail-to-rail input which provides more flexibility for the system designer. Rail-to-rail input is achieved by using in parallel, one PMOS differential pair and one NMOS differential pair. When the common mode input voltage ( $V_{CM}$ ) is near  $V+$ , the NMOS pair is on and the PMOS pair is off. When  $V_{CM}$  is near  $V-$ , the NMOS pair is off and the PMOS pair is on. When  $V_{CM}$  is between  $V+$  and  $V-$ , internal logic decides how much current each differential pair will get. This special logic ensures stable and low distortion amplifier operation within the entire common mode voltage range.

Because both input stages have their own offset voltage ( $V_{OS}$ ) characteristic, the offset voltage of the LPV521 becomes a function of  $V_{CM}$ .  $V_{OS}$  has a crossover point at 1.0V below  $V+$ . Refer to the ' $V_{OS}$  vs.  $V_{CM}$ ' curve in the Typical Performance Characteristics section. Caution should be taken in situations where the input signal amplitude is comparable to the  $V_{OS}$  value and/or the design requires high accuracy. In these situations, it is necessary for the input signal to avoid the crossover point. In addition, parameters such as PSRR and CMRR which involve the input offset voltage will also be affected by changes in  $V_{CM}$  across the differential pair transition region.

## OUTPUT STAGE


The LPV521 output voltage swings 3 mV from rails at 3.3V supply, which provides the maximum possible dynamic range at the output. This is particularly important when operating on low supply voltages.

The LPV521 Maximum Output Voltage Swing defines the maximum swing possible under a particular output load. The LPV521 output swings 50 mV from the rail at 5V supply with an output load of 100 kΩ.

## DRIVING CAPACITIVE LOAD

The LPV521 is internally compensated for stable unity gain operation, with a 6.2 kHz typical gain bandwidth. However, the unity gain follower is the most sensitive configuration to capacitive load. The combination of a capacitive load placed at the output of an amplifier along with the amplifier's output impedance creates a phase lag, which reduces the phase margin of the amplifier. If the phase margin is significantly reduced, the response will be under damped which causes peaking in the transfer and, when there is too much peaking, the op amp might start oscillating.


In order to drive heavy capacitive loads, an isolation resistor,  $R_{ISO}$ , should be used, as shown in Figure 66. By using this isolation resistor, the capacitive load is isolated from the amplifier's output. The larger the value of  $R_{ISO}$ , the more stable the amplifier will be. If the value of  $R_{ISO}$  is sufficiently large, the feedback loop will be stable, independent of the value of  $C_L$ . However, larger values of  $R_{ISO}$  result in reduced output swing and reduced output current drive.

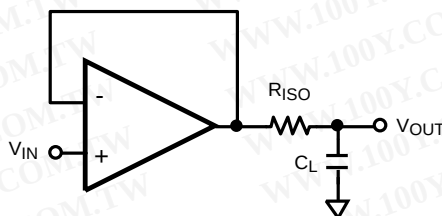

**Figure 66. Resistive Isolation of Capacitive Load**

Recommended minimum values for  $R_{ISO}$  are given in the following table, for 5V supply. Figure 67 shows the typical response obtained with the  $C_L = 50$  pF and  $R_{ISO} = 154$  k $\Omega$ . The other values of  $R_{ISO}$  in the table were chosen to achieve similar dampening at their respective capacitive loads. Notice that for the LPV521 with larger  $C_L$  a smaller  $R_{ISO}$  can be used for stability. However, for a given  $C_L$  a larger  $R_{ISO}$  will provide a more damped response. For capacitive loads of 20 pF and below no isolation resistor is needed.

| $C_L$     | $R_{ISO}$       |
|-----------|-----------------|
| 0 – 20 pF | not needed      |
| 50 pF     | 154 k $\Omega$  |
| 100 pF    | 118 k $\Omega$  |
| 500 pF    | 52.3 k $\Omega$ |
| 1 nF      | 33.2 k $\Omega$ |
| 5 nF      | 17.4 k $\Omega$ |
| 10 nF     | 13.3 k $\Omega$ |

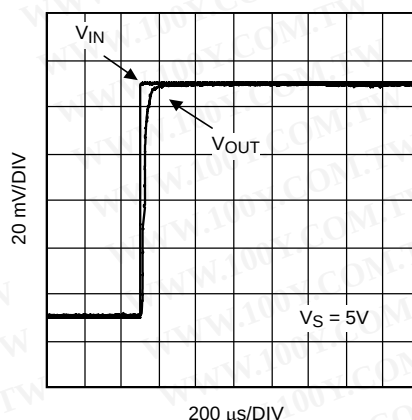

**Figure 67. Step Response**

## EMI SUPPRESSION

The near-ubiquity of cellular, bluetooth, and Wi-Fi signals and the rapid rise of sensing systems incorporating wireless radios make electromagnetic interference (EMI) an evermore important design consideration for precision signal paths. Though RF signals lie outside the op amp band, RF carrier switching can modulate the DC offset of the op amp. Also some common RF modulation schemes can induce down-converted components. The added DC offset and the induced signals are amplified with the signal of interest and thus corrupt the measurement. The LPV521 uses on chip filters to reject these unwanted RF signals at the inputs and power supply pins; thereby preserving the integrity of the precision signal path.

Twisted pair cabling and the active front-end's common-mode rejection provide immunity against low frequency noise (i.e. 60 Hz or 50 Hz mains) but are ineffective against RF interference. Even a few centimeters of PCB trace and wiring for sensors located close to the amplifier can pick up significant 1 GHz RF. The integrated EMI filters of the LPV521 reduce or eliminate external shielding and filtering requirements, thereby increasing system robustness. A larger EMIRR means more rejection of the RF interference. For more information on EMIRR, please refer to AN-1698.

## **POWER SUPPLIES AND LAYOUT**

The LPV521 operates from a single 1.6V to 5.5V power supply. It is recommended to bypass the power supplies with a 0.1  $\mu$ F ceramic capacitor placed close to the  $V^+$  and  $V^-$  pins.

Ground layout improves performance by decreasing the amount of stray capacitance and noise at the op amp's inputs and outputs. To decrease stray capacitance, minimize PC board trace lengths and resistor leads, and place external components close to the op amps' pins.

## REVISION HISTORY

## Changes from Revision B (February 2013) to Revision C

Page

- Changed layout of National Data Sheet to TI format ..... 23



## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| LPV521MG/NOPB    | ACTIVE        | SC70         | DCK                | 5    | 1000           | Green (RoHS<br>& no Sb/Br) | CU SN            | Level-1-260C-UNLIM   | -40 to 125   | AHA                      | <a href="#">Samples</a> |
| LPV521MGE/NOPB   | ACTIVE        | SC70         | DCK                | 5    | 250            | Green (RoHS<br>& no Sb/Br) | CU SN            | Level-1-260C-UNLIM   | -40 to 125   | AHA                      | <a href="#">Samples</a> |
| LPV521MGX/NOPB   | ACTIVE        | SC70         | DCK                | 5    | 3000           | Green (RoHS<br>& no Sb/Br) | CU SN            | Level-1-260C-UNLIM   | -40 to 125   | AHA                      | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.



**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.


**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

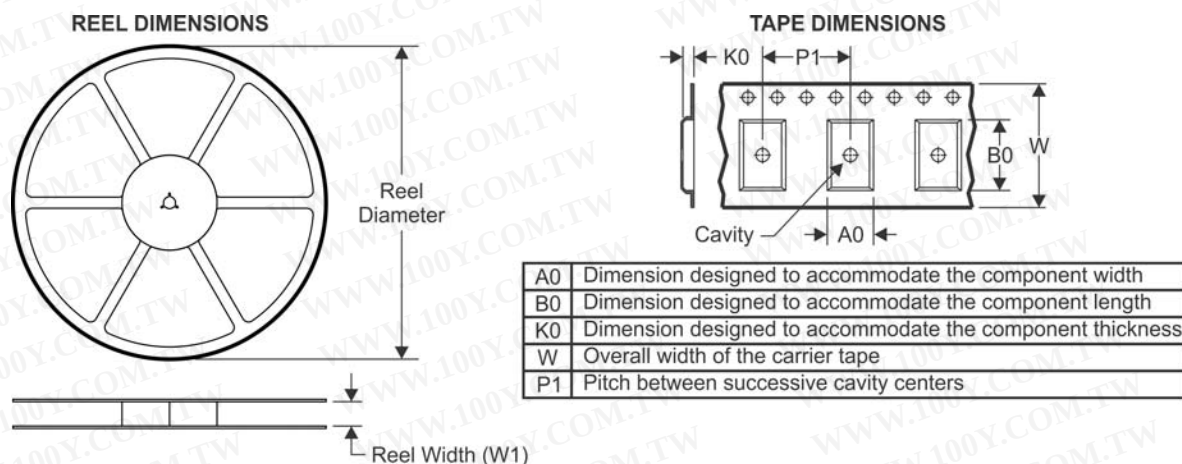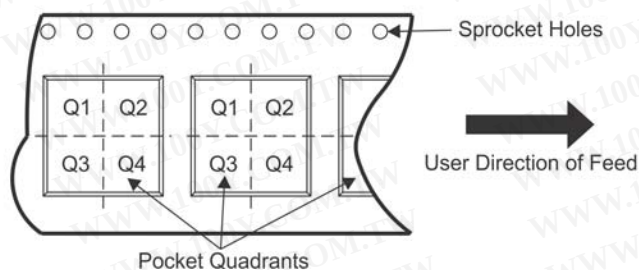**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal
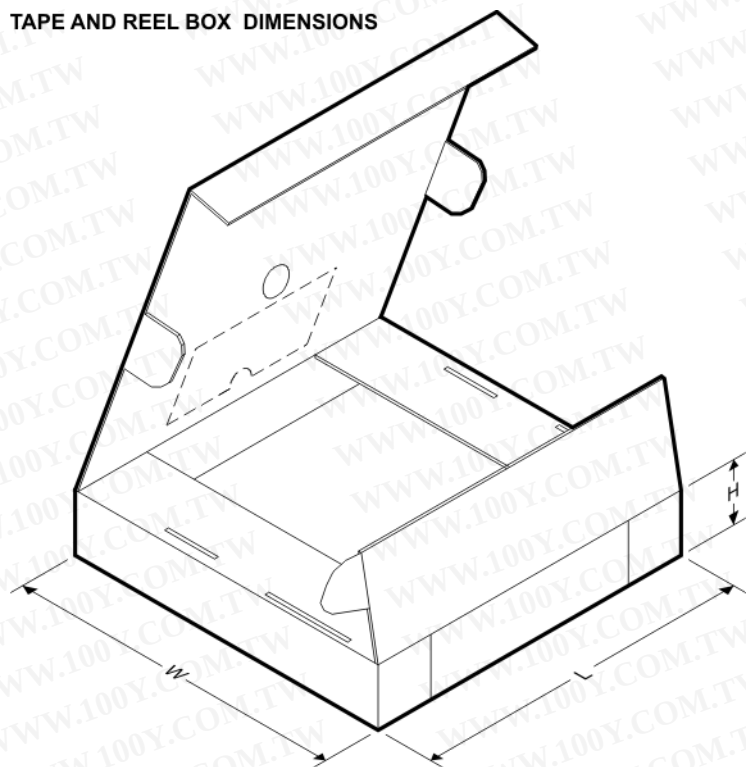
| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LPV521MG/NOPB  | SC70         | DCK             | 5    | 1000 | 178.0              | 8.4                | 2.25    | 2.45    | 1.2     | 4.0     | 8.0    | Q3            |
| LPV521MGE/NOPB | SC70         | DCK             | 5    | 250  | 178.0              | 8.4                | 2.25    | 2.45    | 1.2     | 4.0     | 8.0    | Q3            |
| LPV521MGX/NOPB | SC70         | DCK             | 5    | 3000 | 178.0              | 8.4                | 2.25    | 2.45    | 1.2     | 4.0     | 8.0    | Q3            |


**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LPV521MG/NOPB  | SC70         | DCK             | 5    | 1000 | 210.0       | 185.0      | 35.0        |
| LPV521MGE/NOPB | SC70         | DCK             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| LPV521MGX/NOPB | SC70         | DCK             | 5    | 3000 | 210.0       | 185.0      | 35.0        |

DCK (R-PDSO-G5)

PLASTIC SMALL-OUTLINE PACKAGE

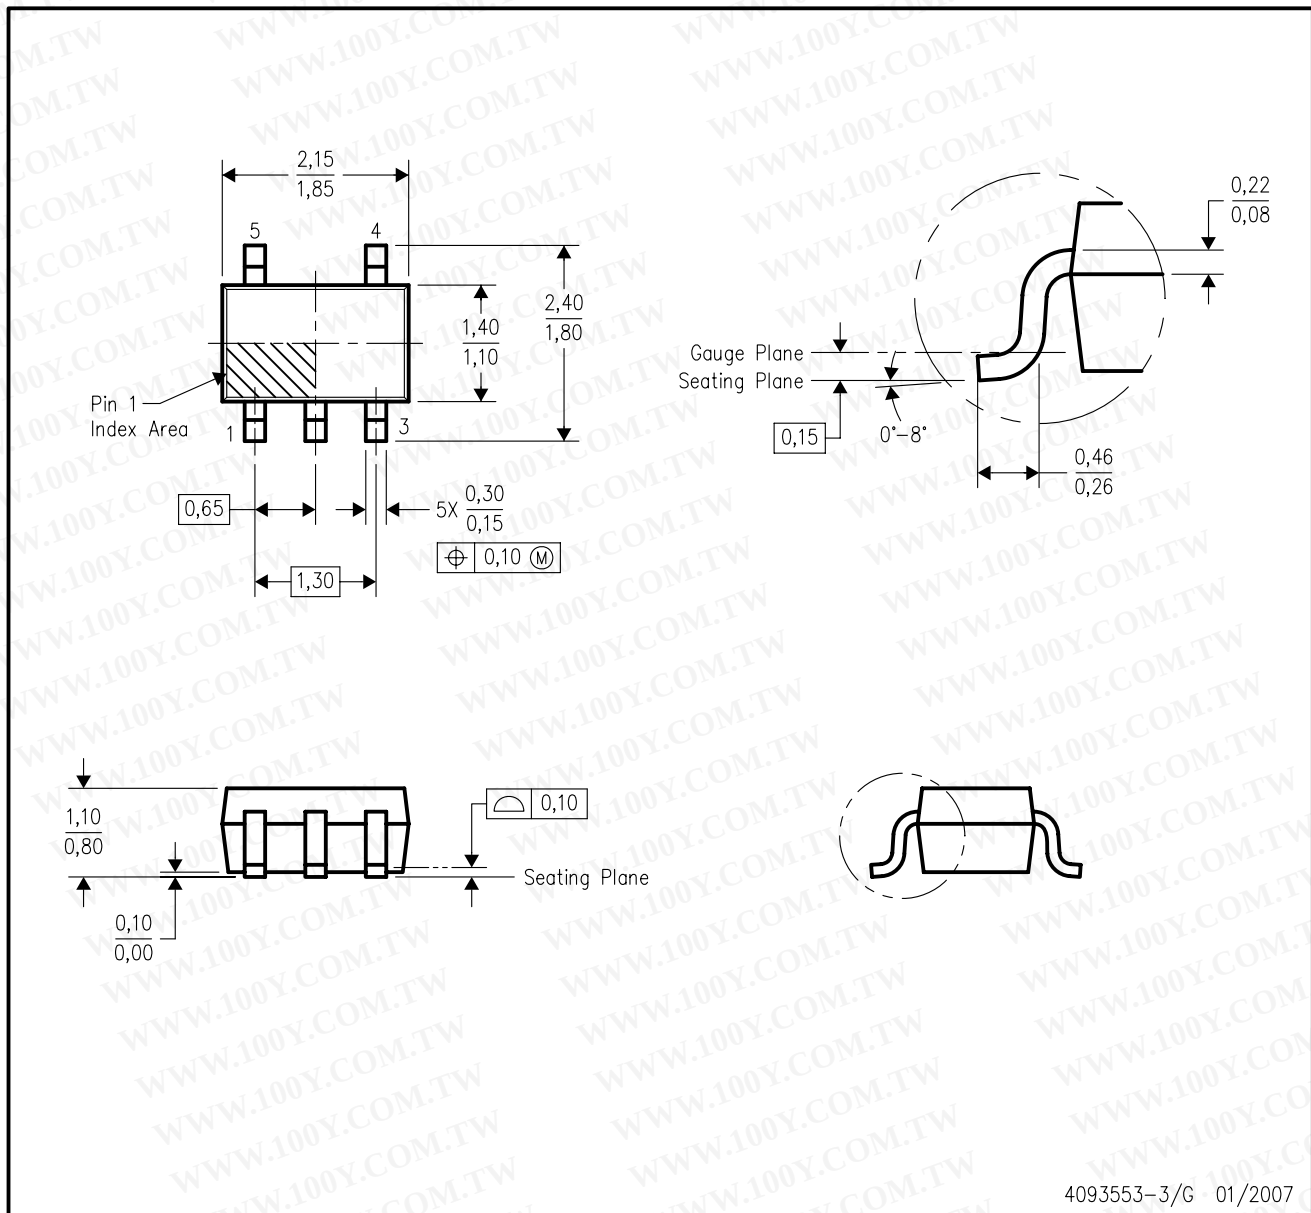

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - D. Falls within JEDEC MO-203 variation AA.



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)