



# ANLY COUNTER

## H8DA MULTI-FUNCTION DIGITAL COUNTER / TIMER

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



### CHARACTERISTICS :

- Counter or Timer function selectable
- Scroll-through menu for all parameters
- Proximity and photoelectric switches compatible
- High-speed response allows 10k counts per second
- Online change of set value possible
- 4 levels of key protection provided
- 3 user selectable mode : Count Up, Count Down and Count Up/Down
- Memory function available
- CE certified


### SPECIFICATION :

Operating voltage	AC/DC(V): 12~48 AC/DC(V): 100~240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Count speed	MAX 30, 1k, 5k or 10k cps
Reset time	MAX 0.1s
Power consumption	Approx. 3.5VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85% RH
Weight	Approx. 260g

### TIME RANGE :

1	0.001s ~ 999.999s	7	0.1m ~ 99999.9m
2	0.01s ~ 9999.99s	8	1m ~ 999999m
3	0.1s ~ 99999.9s	9	1s ~ 99h59m59s
4	1s ~ 999999s	10	1m ~ 9999h59m
5	0.01s ~ 99m59.99s	11	0.1h ~ 99999.9h
6	0.1s ~ 999m59.9s	12	1h ~ 999999h

### CONNECTION :

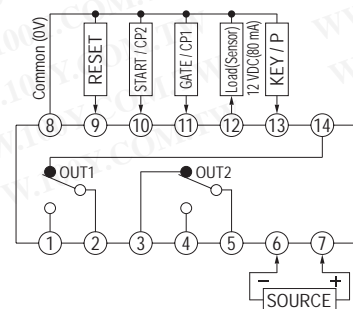


# TIMING CHART : (Counter)


## Input / Output Mode Setting




**Output mode N** : Output and present value display are maintained until reset.

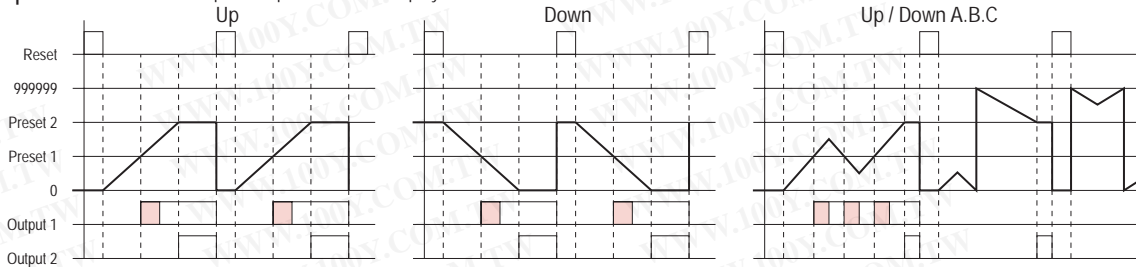


**Output mode F** : Present value display runs continuously. Outputs are maintained until reset.

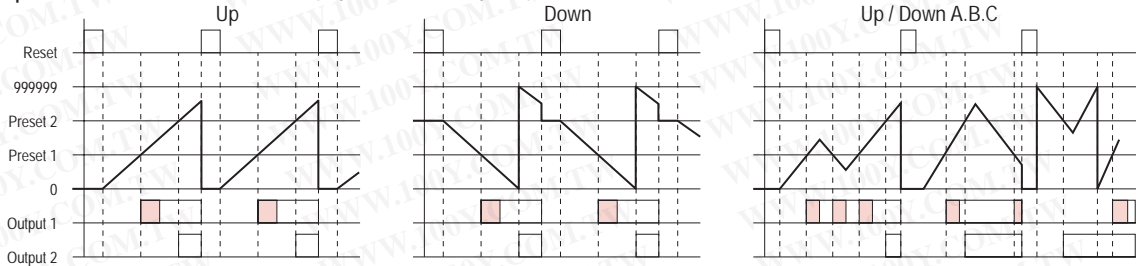


**Output mode C** : Present value is placed in reset start status as soon as count up is reached. The count up is not displayed. Outputs are 1-shot and operate repeatedly. Output 1 is self-holding, and goes off after expiration of the 1-shot period for Output 2. One-shot time periods for Output 1 and 2 are independent.

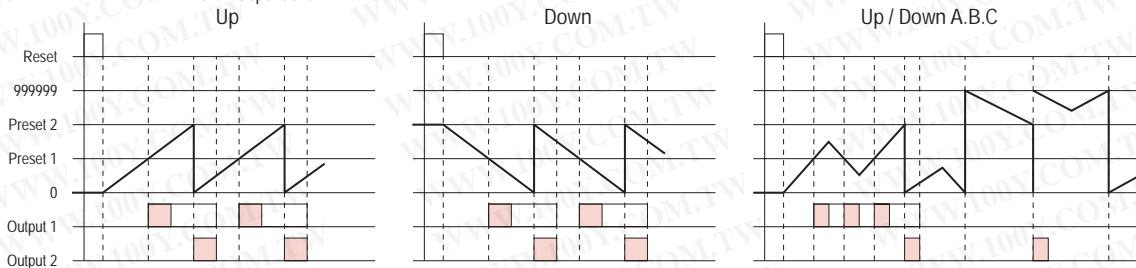


**Output mode R** : Present value is placed in reset start status as soon as count up is reached. Outputs are 1-shot and operate repeatedly. Output 1 is self-holding, and goes off after expiration of the 1-shot period for Output 2. One-shot time periods for Output 1 and 2 are independent.

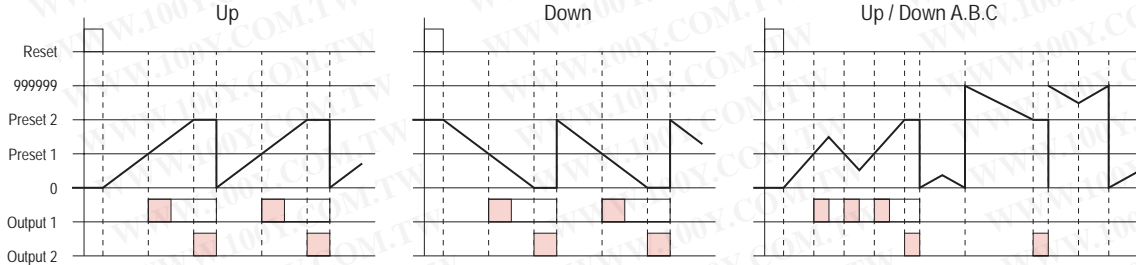


**Output mode K** : Present value runs continuously. Output 1 is self-holding, and goes off after expiration of the 1-shot period for Output 2. One-shot time periods for Output 1 and 2 are independent.

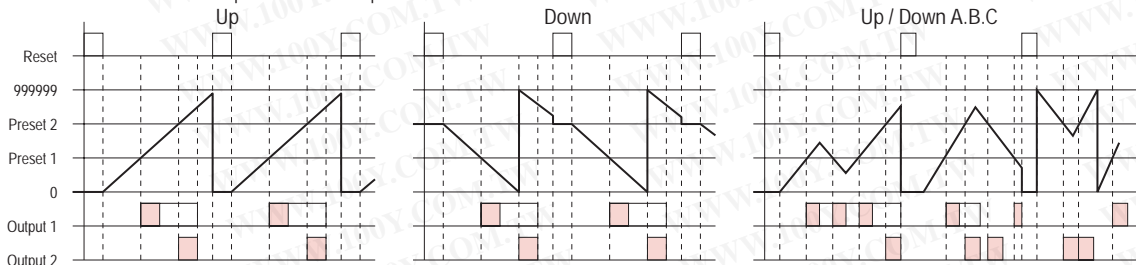


**Output mode P** : Present value display does not change during 1-shot time period, but reset start status is returned to as soon as count is reached. Outputs are 1-shot and operate repeatedly. Output 1 is self-holding, and goes off after expiration of the 1-shot period for Output 2. One-shot time periods for Output 1 and 2 are independent.

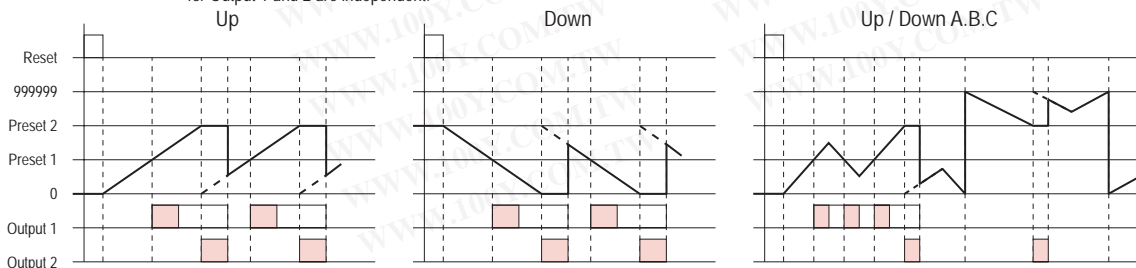

**Output mode Q** : Present value runs continuously through 1-shot time period and returns to reset start status immediately afterward. Outputs are 1-shot and operate repeatedly. Output 1 is self-holding, and goes off after expiration of the 1-shot period for Output 2. One-shot time periods for Output 1 and 2 are independent.

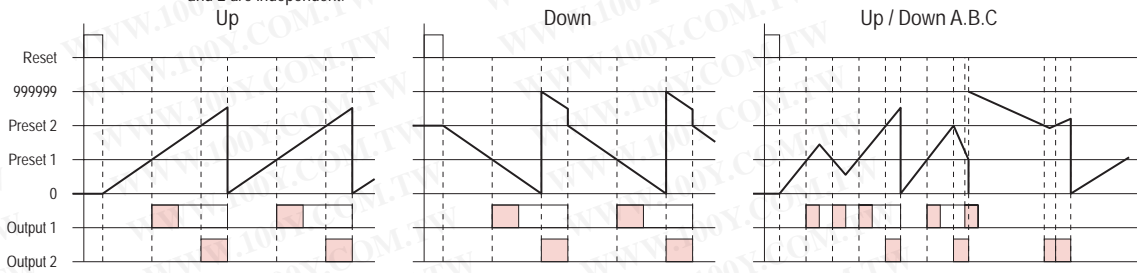


**Output mode A** : Present value and output 1 maintain status until reset. Output 1 and 2 operate independently.

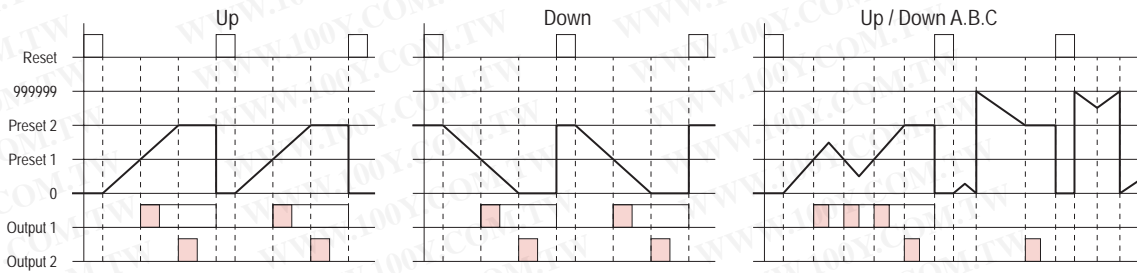


## TIMING CHART : (Timer)


**Output mode A : Signal ON delay 1**  
(Timer resets when power comes ON.)

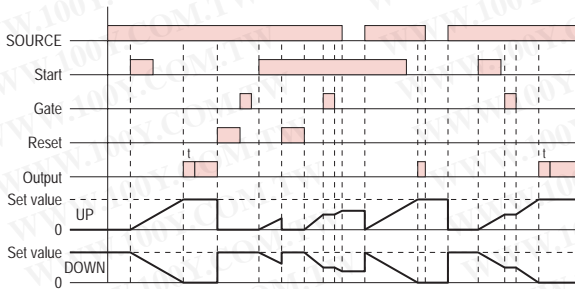


**Output mode A-1 : Signal ON delay 2**  
(Timer resets when power comes ON.)

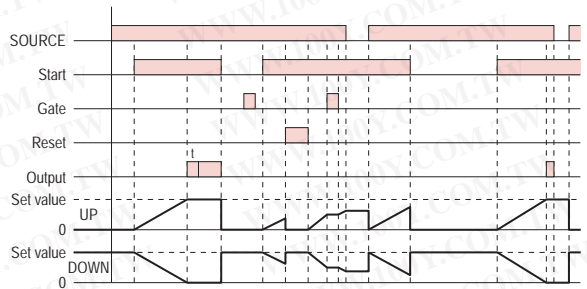


**Output mode A-2 : Power ON delay 1**  
(Timer resets when power comes ON.)

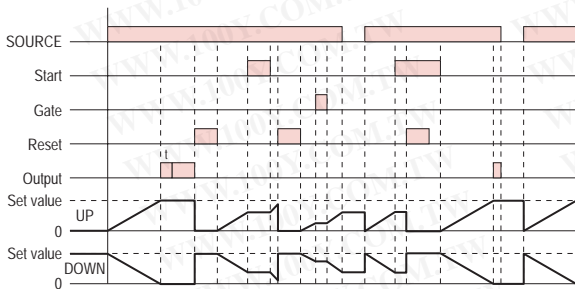


**Output mode A-3 : Power ON delay 2**  
(Timer dose not reset when power comes ON.)

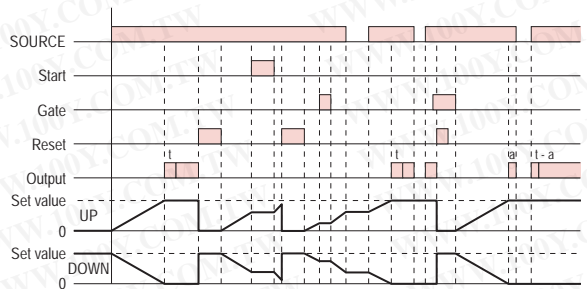

**Output mode B : Repeat cycle 1**  
(Timer resets when power comes ON.)

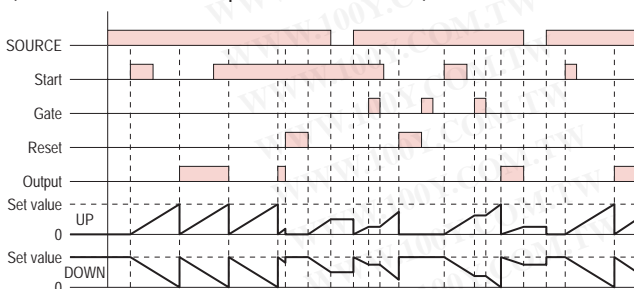


**Output mode B-1 : Repeat cycle 2**  
(Timer dose not reset when power comes ON.)

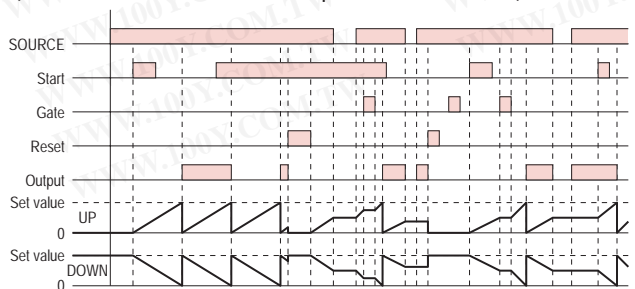


**Note.** In output mode A, A-1, A-2 and A-3, the control output is selectable between the sustained time period or one-shot time period.


Output mode B-2 : Repeat cycle ON start  
(Timer resets when power comes ON.)

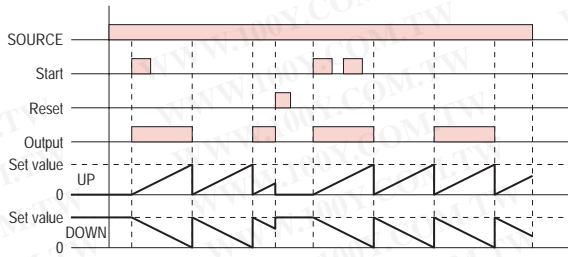


Output mode C : Signal ON/OFF delay  
(Timer resets when power comes ON.)

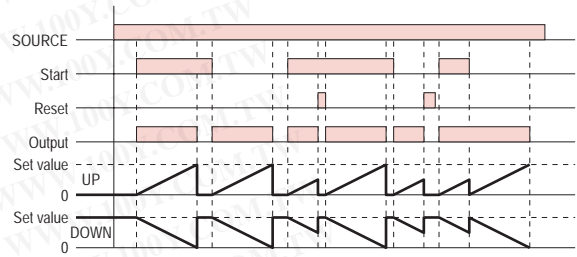


Output mode D : Signal OFF delay  
(Timer resets when power comes ON.)

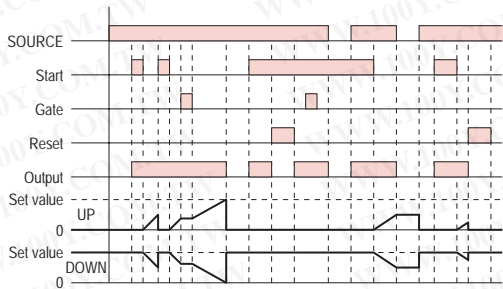

Output mode E : Interval  
(Timer resets when power comes ON.)

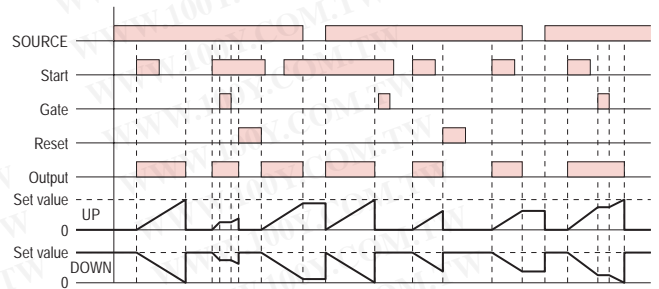


Output mode F : Cumulative  
(Timer does not reset when power comes ON.)

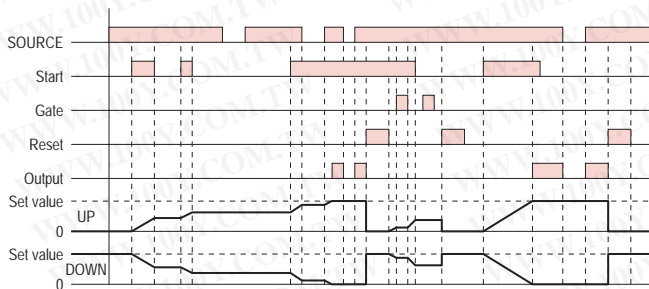

## DIMENSIONS : (mm)

Flush Mounting : Using Clamp

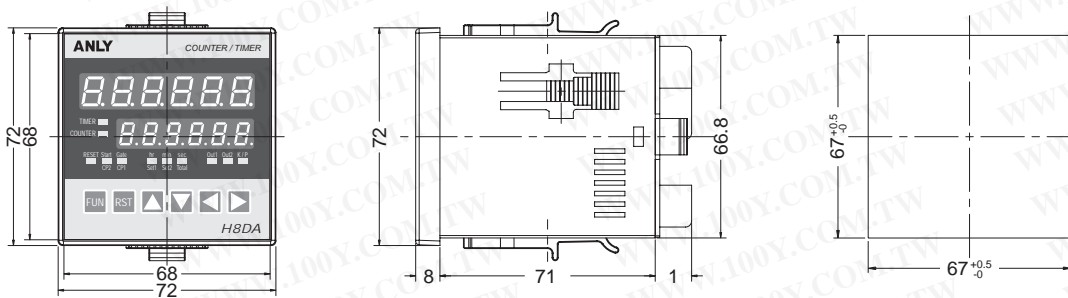

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)