

BAT54 THRU BAT54S

SMALL SIGNAL SCHOTTKY BARRIER DIODES


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FEATURES:

- Extremely fast switching speed
- Very small conduction losses
- Schottky barrier diodes encapsulated in a SOT-23 PACKAGE
- Low forward voltage
- High speed switching applications circuit protection

MECHANICAL DATA

Case : SOT-23 molded plastic

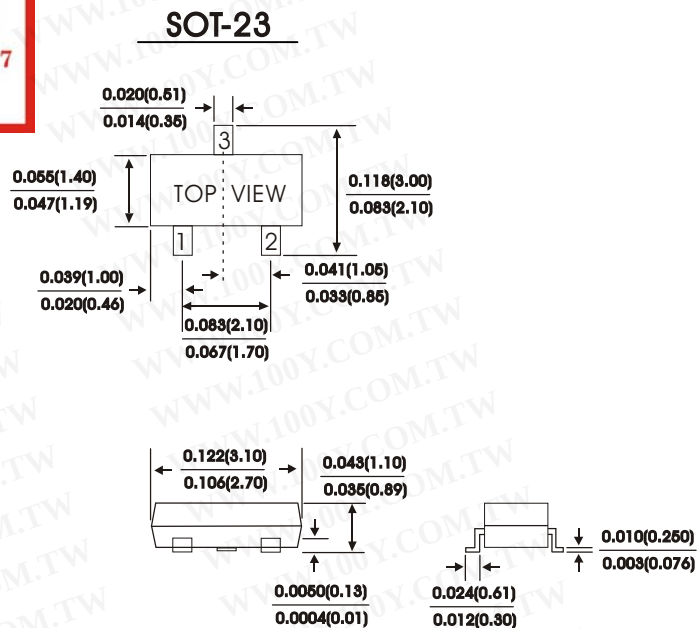

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristic	Symbol	BAT54	BAT54A	BAT54C	BAT54S	Units
Maximum reverse voltage	V_R	30	30	30	30	Volts
Minimum reverse breakdown voltage $I_R = 10\mu A$	$V_{(BR)R}$	30				Volts
Maximum average forward rectified current	$I_{(AV)}$	0.2				Amps
Maximum Peakrepetitive forward current rated V_R , square wave, 20KHZ (Per leg)	I_{FRM}	0.4				Amps
Maximum instantaneous forward voltage (Per leg)	V_F	IF=0.1mA IF=1.0mA IF=10mA IF=30mA IF=100mA 0.24 0.32 0.40 0.50 1.00				Volts
Maximum reverse current at $V_R = 25V$ (Per leg)	I_R	2.0				μA
Maximum reverse recovery time (NOTE 1) (Per leg)	T_{RR}	5.0				nS
Maximum total capacitance (NOTE 2)	C_T	10				P _F
Operating junction temperature range	T_J	-55to + 125				°C
Storage temperature range	T_{Stg}	-55to + 150				°C

NOTES:

(1) Reverse Recovery Test CONDITION : $I_F = I_R = 10mA$, $I_R(REC) = 1.0mA$

(2) Measured at 1MHZ and reverse Voltage of 1.0V

RATINGS AND CHARACTERISTIC CURVES BAT54 THRU BAT54S

Device Marking

Item	Marking	Equivalent Circuit diagram
BAT54	LV 3	
BAT54A	B 6	
BAT54C	KV 3	
BAT54S	LD 3	

FIG.1 - TYPICAL REVERSE CHARACTERISTICS

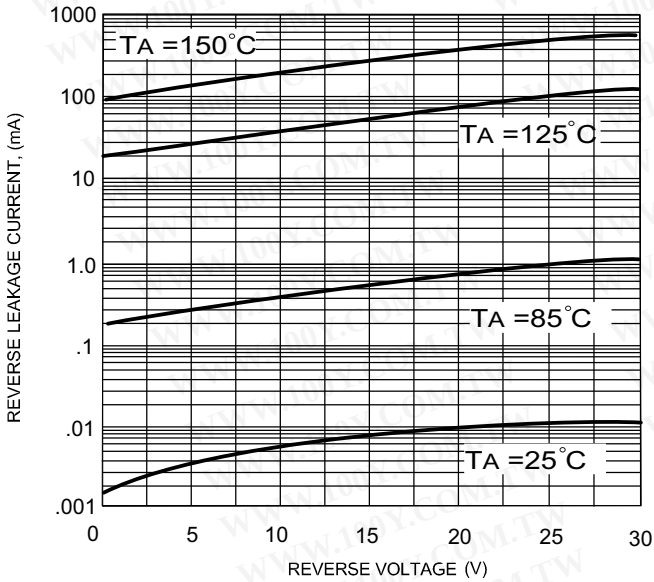


FIG.2 - TYPICAL FORWARD CHARACTERISTICS


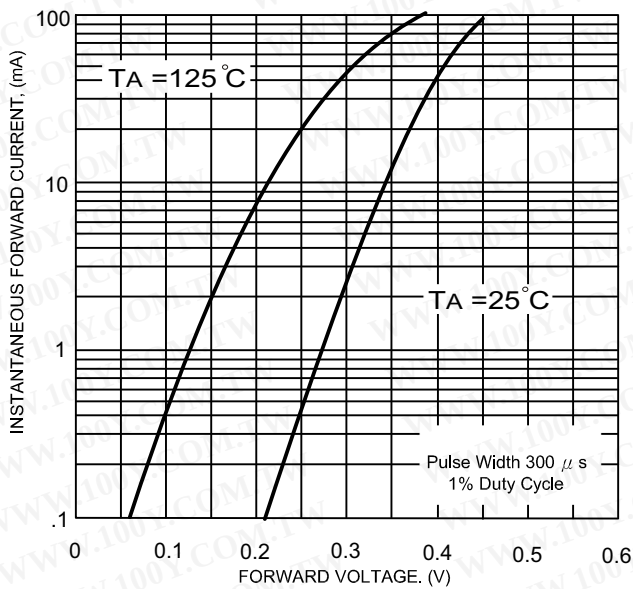


FIG.3- TYPICAL CAPACITANCE

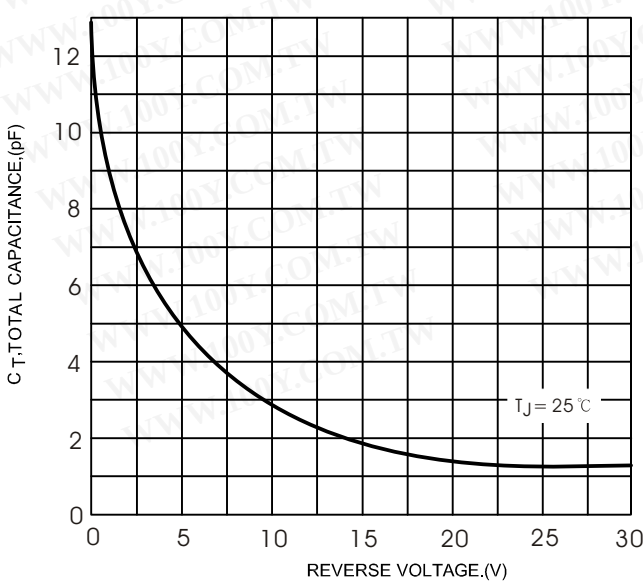


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


RATINGS AND CHARACTERISTIC CURVES BAT54 THRU BAT54S

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Figure 4 Recovery Test equivalent Circuit

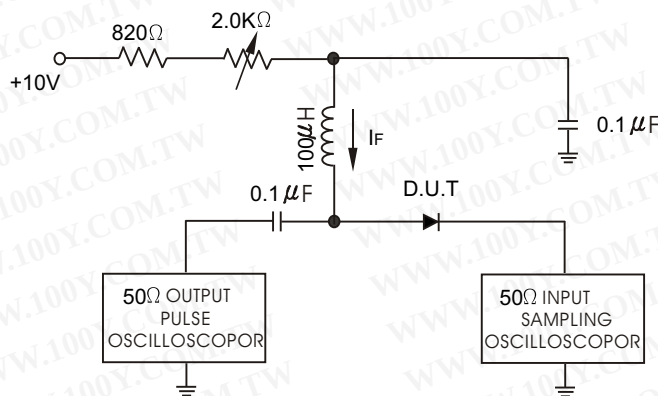

NOTES : 1.A 2.0K Variable resistor for forward current (I_F) of 10mA
 2.Input pulses is adjusted so $I_{R(peak)}$ is equal to 10mA
 3. t_p trr

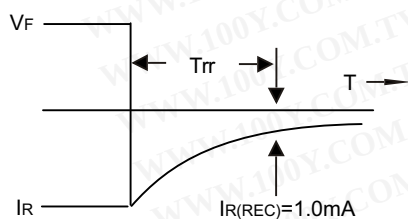

OUTPUT PULSE

($I_F = I_R = 10\text{mA}$, MEASURED
 at $I_{R(REC)} = 1.0\text{mA}$)

