

Dual/Quad Low Power Precision, Picoamp Input Op Amps

FEATURES

- Offset Voltage – Prime Grade: 60 μ V Max
- Offset Voltage – Low Cost Grade (Including Surface Mount Dual/Quad): 75 μ V Max
- Offset Voltage Drift: 0.5 μ V/ $^{\circ}$ C Max
- Input Bias Current: 250pA Max
- 0.1Hz to 10Hz Noise: 0.3 μ V_{P-P}, 2.2pA_{P-P}
- Supply Current per Amplifier: 400 μ A Max
- CMRR: 120dB Min
- Voltage Gain: 1 Million Min
- Guaranteed Specs with ± 1.0 V Supplies
- Guaranteed Matching Specifications
- SO-8 Package – Standard Pinout
- LT1114 in Narrow Surface Mount Package

APPLICATIONS

- Picoampere/Microvolt Instrumentation
- Two and Three Op Amp Instrumentation Amplifiers
- Thermocouple and Bridge Amplifiers
- Low Frequency Active Filters
- Photo Current Amplifiers
- Battery-Powered Systems

DESCRIPTION

The LT[®]1112 dual and LT1114 quad op amps achieve a new standard in combining low cost and outstanding precision specifications.

The performance of the selected prime grades matches or exceeds competitive devices. In the design of the LT1112/LT1114 however, particular emphasis has been placed on optimizing performance in the low cost plastic and SO packages. For example, the 75 μ V maximum offset voltage in these low cost packages is the lowest on any dual or quad non-chopper op amp.


The LT1112/LT1114 also provide a full set of matching specifications, facilitating their use in such matching dependent applications as two and three op amp instrumentation amplifiers.

Another set of specifications is furnished at ± 1 V supplies. This, combined with the low 320 μ A supply current per amplifier, allows the LT1112/LT1114 to be powered by two nearly discharged AA cells.


 LTC and LT are registered trademarks of Linear Technology Corporation.
 Protected by U.S. Patents 4,575,685; 4,775,884 and 4,837,496

TYPICAL APPLICATION

Dual Output, Buffered Reference (On Single 3V Supply)

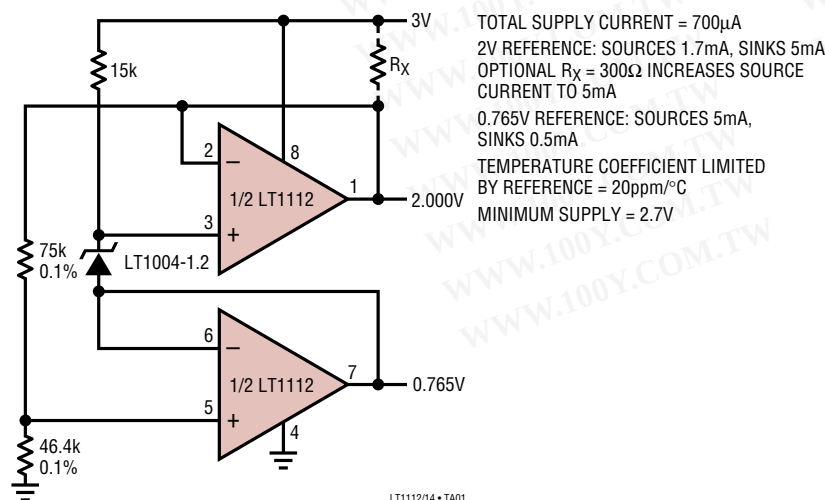

Distribution of Input Offset Voltage (In All Packages)

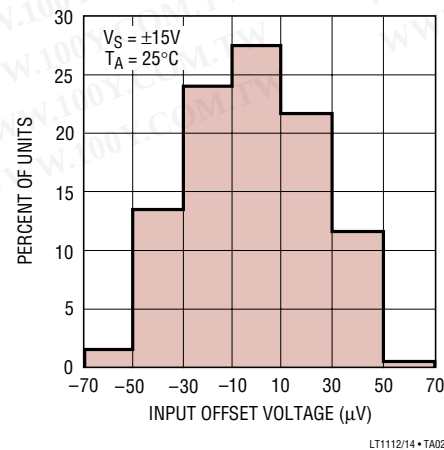

LT1112/LT1114

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage $\pm 20V$
 Differential Input Current (Note 2) $\pm 10mA$
 Input Voltage (Equal to Supply Voltage) $\pm 20V$
 Output Short-Circuit Duration Indefinite
 Storage Temperature Range $-65^{\circ}C$ to $150^{\circ}C$
 Lead Temperature (Soldering, 10 sec) $300^{\circ}C$
 Operating Temperature Range (Note 11)

Specified Temperature Range (Note 12)

LT1112AM/LT1112M
 LT1114AM/LT1114M (**OBSOLETE**)... $-55^{\circ}C$ to $125^{\circ}C$
 LT1112AC/LT1112C/LT1112S8
 LT1114AC/LT1114C/LT1114S $-40^{\circ}C$ to $85^{\circ}C$
 LT1112I/LT1114I $-40^{\circ}C$ to $85^{\circ}C$

LT1112AM/LT1112M
 LT1114AM/LT1114M (**OBSOLETE**)... $-55^{\circ}C$ to $125^{\circ}C$
 LT1112AC/LT1112C/LT1112S8
 LT1114AC/LT1114C/LT1114S $-40^{\circ}C$ to $85^{\circ}C$
 LT1112I/LT1114I $-40^{\circ}C$ to $85^{\circ}C$

PACKAGE/ORDER INFORMATION

N8 PACKAGE 8-LEAD PDIP $T_{JMAX} = 150^{\circ}C$, $\theta_{JA} = 130^{\circ}C/W$	ORDER PART NUMBER LT1112ACN8 LT1112CN8 LT1112IN8	S8 PACKAGE 8-LEAD PLASTIC SO $T_{JMAX} = 150^{\circ}C$, $\theta_{JA} = 190^{\circ}C/W$	ORDER PART NUMBER LT1112S8 LT1112IS8
J8 PACKAGE 8-LEAD Cerdip $T_{JMAX} = 160^{\circ}C$, $\theta_{JA} = 100^{\circ}C/W$ OBSOLETE PACKAGE Consider the N8 Package for Alternate Source	ORDER PART NUMBER LT1112AMJ8 LT1112MJ8		S8 PART MARKING 1112 1112I
N PACKAGE 14-LEAD PDIP $T_{JMAX} = 150^{\circ}C$, $\theta_{JA} = 110^{\circ}C/W$	ORDER PART NUMBER LT1114ACN LT1114CN LT1114IN	S PACKAGE 16-LEAD PLASTIC SO (NARROW) $T_{JMAX} = 150^{\circ}C$, $\theta_{JA} = 150^{\circ}C/W$	ORDER PART NUMBER LT1114S LT1114IS
J PACKAGE 14-LEAD Cerdip $T_{JMAX} = 160^{\circ}C$, $\theta_{JA} = 80^{\circ}C/W$ (J) OBSOLETE PACKAGE Consider the N Package for Alternate Source	ORDER PART NUMBER LT1114AMJ LT1114MJ		

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $V_{CM} = 0V$, $T_A = 25^\circ C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 3)	LT1112AM/AC LT1114AM/AC			LT1112M/C/I LT1114M/C/I			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	$V_S = \pm 1.0V$		20 40	60 110		25 45	75 130	μV μV
$\frac{\Delta V_{OS}}{\Delta \text{Time}}$	Long Term Input Offset Voltage Stability			0.3			0.3		$\mu V/Mo$
I_{OS}	Input Offset Current	LT1114S/LT1114IS		50	180		60 75	230 330	pA pA
I_B	Input Bias Current	LT1114S/LT1114IS		± 70	± 250		± 80 ± 100	± 280 ± 450	pA pA
e_n	Input Noise Voltage	0.1Hz to 10Hz (Note 10)		0.3	0.9		0.3	0.9	μV_{P-P}
	Input Noise Voltage Density	$f_0 = 10\text{Hz}$ (Note 10) $f_0 = 1000\text{Hz}$ (Note 10)		16 14	28 18		16 14	28 18	$nV/\sqrt{Hz}$ $nV/\sqrt{Hz}$
i_n	Input Noise Current	0.1Hz to 10Hz		2.2			2.2		pA_{P-P}
	Input Noise Current Density	$f_0 = 10\text{Hz}$ $f_0 = 1000\text{Hz}$		0.030 0.008			0.030 0.008		$pA/\sqrt{Hz}$ $pA/\sqrt{Hz}$
V_{CM}	Input Voltage Range		± 13.5	± 14.3		± 13.5	± 14.3		V
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13.5V$	120	136		115	136		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 1.0V$ to $\pm 20V$	116	126		114	126		dB
	Minimum Supply Voltage	(Note 5)	± 1.0			± 1.0			V
R_{IN}	Input Resistance Differential Mode Common Mode	(Note 4)	20	50 800		15	40 700		M Ω G Ω
A_{VOL}	Large-Signal Voltage Gain	$V_0 = \pm 12V$, $R_L = 10k\Omega$ $V_0 = \pm 10V$, $R_L = 2k\Omega$	1000 800	5000 1500		800 600	5000 1300		V/mV V/mV
V_{OUT}	Output Voltage Swing	$R_L = 10k\Omega$ $R_L = 2k\Omega$	± 13.0 ± 11.0	± 14.0 ± 12.4		± 13.0 ± 11.0	± 14.0 ± 12.4		V V
SR	Slew Rate		0.16	0.30		0.16	0.30		V/ μs
GBW	Gain-Bandwidth Product	$f_0 = 10\text{kHz}$	450	750		450	750		kHz
I_S	Supply Current per Amplifier	$V_S = \pm 1.0V$		350 320	400 370		350 320	450 420	μA μA
	Channel Separation	$f_0 = 10\text{Hz}$		150			150		dB
ΔV_{OS}	Offset Voltage Match	(Note 6)		35	100		40	130	μV
ΔI_B^+	Noninverting Bias Current Match (Notes 6, 7)	LT1114S/LT1114IS		100	450		100 120	500 680	pA pA
ΔCMRR	Common Mode Rejection Match	(Notes 6, 8)	117	136		113	136		dB
ΔPSRR	Power Supply Rejection Match	(Notes 6, 8)	114	130		112	130		dB

LT1112/LT1114

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range of $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$, otherwise specifications are at $T_A = 25^{\circ}\text{C}$. $V_S = \pm 15\text{V}$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 3)		LT1112AMJ8 LT1114AMJ			LT1112MJ8 LT1114MJ			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	$V_S = \pm 1.2\text{V}$	●	35	120		45	150		μV
			●	60	220		70	260		μV
$\frac{\Delta V_{OS}}{\Delta \text{Temp}}$	Average Input Offset Voltage Drift	(Note 9)	●	0.15	0.5		0.20	0.75		$\mu\text{V}/^{\circ}\text{C}$
I_{OS}	Input Offset Current		●	80	400		100	500		pA
I_B	Input Bias Current		●	± 150	± 600		± 170	± 700		pA
V_{CM}	Input Voltage Range		●	± 13.5	± 14.1		± 13.5	± 14.1		V
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13.5\text{V}$	●	116	130		111	130		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 1.2\text{V}$ to $\pm 20\text{V}$	●	112	124		110	124		dB
A_{VOL}	Large-Signal Voltage Gain	$V_O = \pm 12\text{V}$, $R_L = 10\text{k}\Omega$ $V_O = \pm 10\text{V}$, $R_L = 2\text{k}\Omega$	●	500	2500		400	2500		V/mV
			●	200	600		170	500		V/mV
V_{OUT}	Output Voltage Swing	$R_L = 10\text{k}\Omega$	●	± 13.0	± 13.85		± 13.0	± 13.85		V
SR	Slew Rate		●	0.12	0.22		0.12	0.22		V/ μs
I_S	Supply Current per Amplifier		●	380	460		380	530		μA
ΔV_{OS}	Offset Voltage Match	(Note 6)	●	55	200		70	240		μV
	Offset Voltage Match Drift	(Notes 6, 9)	●	0.2	0.7		0.3	1.0		$\mu\text{V}/^{\circ}\text{C}$
ΔI_B^+	Noninverting Bias Current Match	(Notes 6, 7)	●	150	750		170	850		pA
ΔCMRR	Common Mode Rejection Ratio	(Notes 6, 8)	●	112	130		106	130		dB
ΔPSRR	Power Supply Rejection Ratio	(Notes 6, 8)	●	109	126		106	126		dB

The ● denotes the specifications which apply over the full operating temperature range of $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$, otherwise specifications are at $T_A = 25^{\circ}\text{C}$. $V_S = \pm 15\text{V}$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 3)		LT1112ACN8 LT1114ACN			LT1112CN8/S8/IS8 LT1114CN/S/IS			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	LT1112CN8 LT1112S8, LT1114CN/S $V_S = \pm 1.2\text{V}$	●	27	100		30	125		μV
			●	35	125		45	150		μV
			●	50	175		65	210		μV
$\frac{\Delta V_{OS}}{\Delta \text{Temp}}$	Average Input Offset Voltage Drift (Note 9)	LT1112CN8 LT1112S8, LT1114CN/S	●	0.15	0.5		0.2	0.75		$\mu\text{V}/^{\circ}\text{C}$
			●	0.3	1.1		0.4	1.3		$\mu\text{V}/^{\circ}\text{C}$
I_{OS}	Input Offset Current	LT1114S	●	60	220		70	290		pA
			●				90	420		pA
I_B	Input Bias Current	LT1114S	●	± 80	± 300		± 90	± 350		pA
			●				± 115	± 550		pA
V_{CM}	Input Voltage Range		●	± 13.5	± 14.2		± 13.5	± 14.2		V
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13.5\text{V}$	●	118	133		113	133		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 1.2\text{V}$ to $\pm 20\text{V}$	●	114	125		112	125		dB
A_{VOL}	Large-Signal Voltage Gain	$V_O = \pm 12\text{V}$, $R_L = 10\text{k}\Omega$ $V_O = \pm 10\text{V}$, $R_L = 2\text{k}\Omega$	●	800	4000		650	4000		V/mV
			●	500	1300		400	1000		V/mV
V_{OUT}	Output Voltage Swing	$R_L = 10\text{k}\Omega$	●	± 13.0	± 13.9		± 13.0	± 13.9		V
SR	Slew Rate		●	0.14	0.27		0.14	0.27		V/ μs
I_S	Supply Current per Amplifier		●	370	440		370	500		μA
ΔV_{OS}	Offset Voltage Match (Note 6)	LT1112CN8 LT1112S8, LT1114CN/S	●	45	170		55	210		μV
			●	55	220		70	270		μV

111214fa

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range of $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$, otherwise specifications are at $T_A = 25^{\circ}\text{C}$. $V_S = \pm 15\text{V}$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 3)		LT1112ACN8 LT1114ACN			LT1112CN8/S8/IS8 LT1114CN/S/IS			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
	Offset Voltage Match Drift (Notes 6, 9)	LT1112N8 LT1112S8, LT1114CN/S	● ●		0.2 0.4	0.7 1.6		0.3 0.5	1.0 1.9	$\mu\text{V}/^{\circ}\text{C}$ $\mu\text{V}/^{\circ}\text{C}$
ΔI_B^+	Noninverting Bias Current Match (Notes 6, 7)	LT1114S	● ●		120	530		135 160	620 880	pA pA
ΔCMRR	Common Mode Rejection Ratio	(Notes 6, 8)	●	114	134		109	134		dB
ΔPSRR	Power Supply Rejection Ratio	(Notes 6, 8)	●	110	128		108	128		dB

The ● denotes the specifications which apply over the full operating temperature range of $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$, otherwise specifications are at $T_A = 25^{\circ}\text{C}$. $V_S = \pm 15\text{V}$, unless otherwise noted. (Note 12)

SYMBOL	PARAMETER	CONDITIONS (Note 3)		LT1112ACN8 LT1114ACN			LT1112CN8/IN8/S8/IS8 LT1114CN/S/IS			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	LT1112CN8/IN8 LT1112S8/IS8, LT1114CN/S/IS $V_S = \pm 1.2\text{V}$	● ● ●		30 40 55	110 135 200		35 45 60	135 160 240	μV μV μV
$\frac{\Delta V_{OS}}{\Delta\text{Temp}}$	Average Input Offset Voltage Drift	LT1112CN8/IN8 LT1112S8/IS8, LT1114CN/S/IS	● ●		0.15 0.30	0.50 1.10		0.20 0.40	0.75 1.30	$\mu\text{V}/^{\circ}\text{C}$ $\mu\text{V}/^{\circ}\text{C}$
I_{OS}	Input Offset Current	LT1114S/IS	● ●		70	330		85 110	400 600	pA pA
I_B	Input Bias Current	LT1114S/IS	● ●		± 110	± 500		± 120 ± 150	± 550 ± 800	pA pA
V_{CM}	Input Voltage Range		●	± 13.5	± 14.1		± 13.5	± 14.1		V
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13.5\text{V}$	●	117	132		112	132		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 1.2\text{V}$ to $\pm 20\text{V}$	●	113	125		111	125		dB
A_{VOL}	Large-Signal Voltage Gain	$V_O = \pm 12\text{V}$, $R_L = 10\text{k}\Omega$ $V_O = \pm 10\text{V}$, $R_L = 2\text{k}\Omega$	● ●	700 400	3300 1100		600 300	3300 900		V/mV V/mV
V_{OUT}	Output Voltage Swing	$R_L = 10\text{k}\Omega$	●	± 13.0	± 13.85		± 13.0	± 13.85		V
SR	Slew Rate		●	0.13	0.24		0.13	0.24		V/ μs
I_S	Supply Current per Amplifier		●		370	450		370	510	μA
ΔV_{OS}	Offset Voltage Match (Note 6)	LT1112CN8/IN8 LT1112S8/IS8, LT1114CN/S/IS	● ●		50 60	180 230		60 70	225 270	μV μV
	Offset Voltage Match Drift (Notes 6)	LT1112CN8/IN8 LT1112S8/IS8, LT1114CN/S/IS	● ●		0.2 0.4	0.7 1.6		0.3 0.5	1.0 1.9	$\mu\text{V}/^{\circ}\text{C}$ $\mu\text{V}/^{\circ}\text{C}$
ΔI_B^+	Noninverting Bias Current Match (Notes 6, 7)	LT1114S/IS	● ●		140	660		155 190	770 1300	pA pA
ΔCMRR	Common Mode Rejection Ratio	(Notes 6, 8)	●	113	133		109	133		dB
ΔPSRR	Power Supply Rejection Ratio	(Notes 6, 8)	●	110	127		107	127		dB

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: Differential input voltages greater than 1V will cause excessive current to flow through the input protection diodes unless limiting resistance is used.

Note 3: Typical parameters are defined as the 60% yield of parameter distributions of individual amplifiers; i.e., out of 100 LT1114s (or 100 LT1112s) typically 240 op amps (or 120) will be better than the indicated specification.

Note 4: This parameter is guaranteed by design and is not tested.

Note 5: Offset voltage, supply current and power supply rejection ratio are measured at the minimum supply voltage.

Note 6: Matching parameters are the difference between amplifiers A and D and between B and C on the LT1114; between the two amplifiers on the LT1112.

Note 7: This parameter is the difference between two noninverting input bias currents.

ELECTRICAL CHARACTERISTICS

Note 8: ΔCMRR and ΔPSRR are defined as follows: (1) CMRR and PSRR are measured in $\mu\text{V/V}$ on the individual amplifiers. (2) The difference is calculated between the matching sides in $\mu\text{V/V}$. (3) The result is converted to dB.

Note 9: This parameter is not 100% tested.


Note 10: These parameters are not tested. More than 99% of the op amps tested during product characterization have passed the maximum limits. 100% passed at 1kHz.

Note 11: The LT1112AC/LT1112C/LT1112S8/LT1112I and LT1114AC/LT1114C/LT1114S/LT1114I are guaranteed functional over the temperature range of -40°C to 85°C .

Note 12: The LT1112AC/LT1112C/LT1112S8/LT1114AC/LT1114C/LT1114S are guaranteed to meet specified performance from 0°C to 70°C and are designed, characterized and expected to meet specified performance from -40°C to 85°C , but are not tested or QA sampled at these temperatures. The LT1112I/LT1114I are guaranteed to meet specified performance from -40°C to 85°C .


TYPICAL PERFORMANCE CHARACTERISTICS

Input Bias and Offset Current,
Noninverting Bias Current Match
vs Temperature

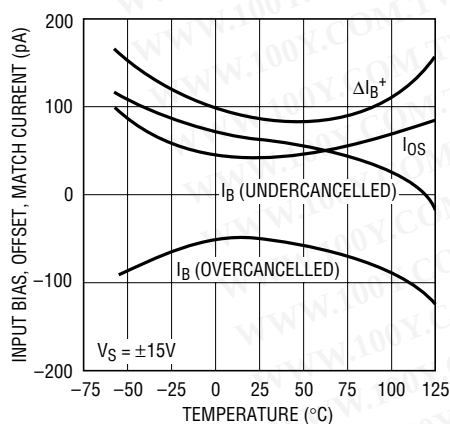


LT1112/14 • TPC01

Input Bias Current Over
Common Mode Range

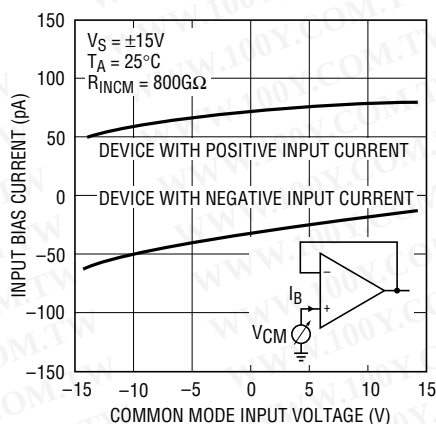


LT1112/14 • TPC02

Distribution of Input Bias Current
(In All Packages Except LT1114S)

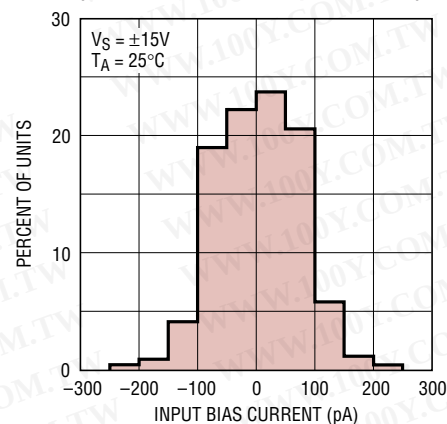


LT1112/14 • TPC03

Drift with Temperature
LT1112N8/J8, LT1114J

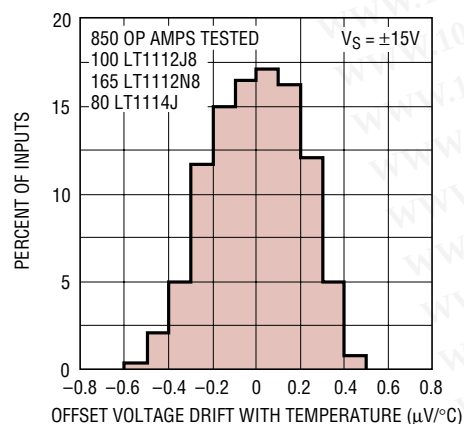


LT1112/14 • TPC04

Drift with Temperature
LT1112S8, LT1114N/S

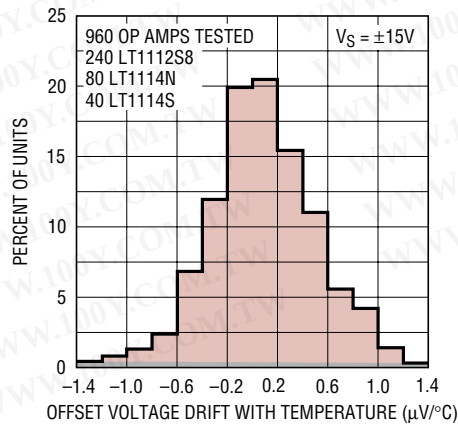

LT1112/14 • TPC05


Distribution of Offset Voltage at
 $V_S = \pm 1.0\text{V}$ (In All Packages)

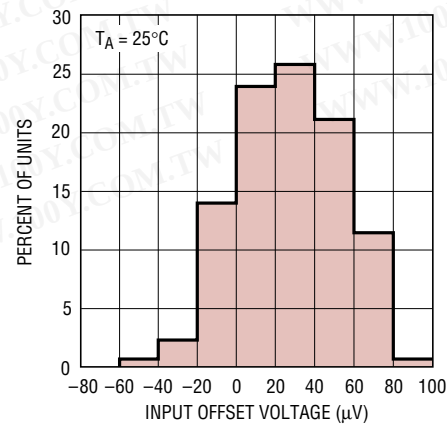


LT1112/14 • TPC06

TYPICAL PERFORMANCE CHARACTERISTICS


Distribution of Offset Voltage Match

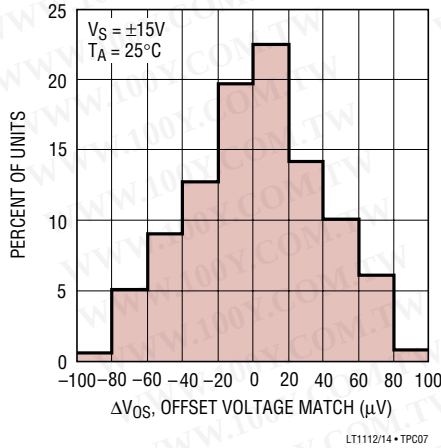


Distribution of Offset Voltage Match Drift (LT1112J8, LT1112N8, LT1114J Packages)

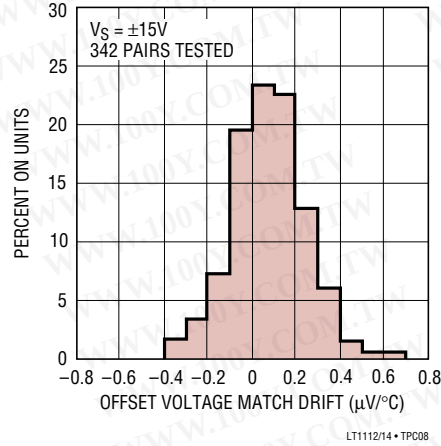


Distribution of Offset Voltage Match Drift (LT1112S8, LT1114N, LT1114S Packages)

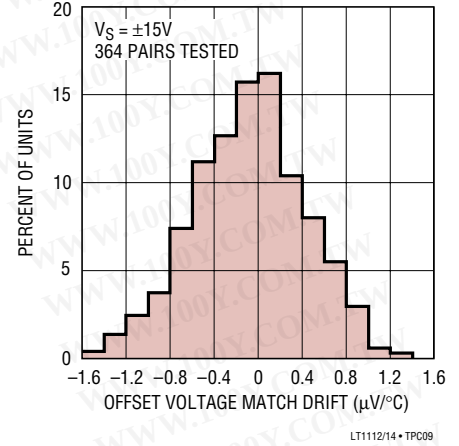


Noise Spectrum

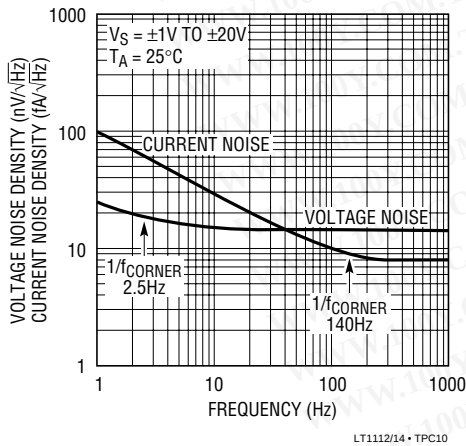


0.1Hz to 10Hz Noise

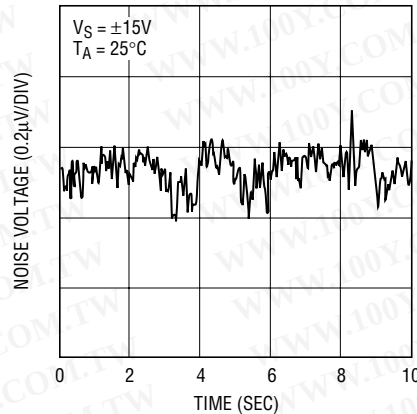


0.01Hz to 1Hz Noise

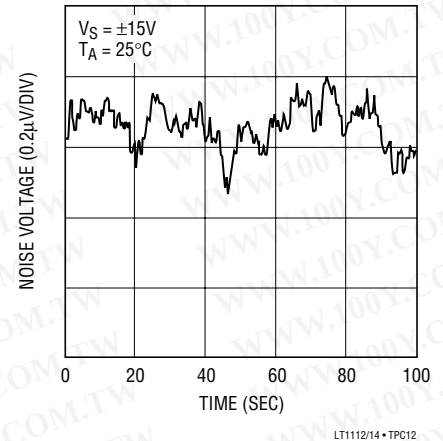


Warm-Up Drift

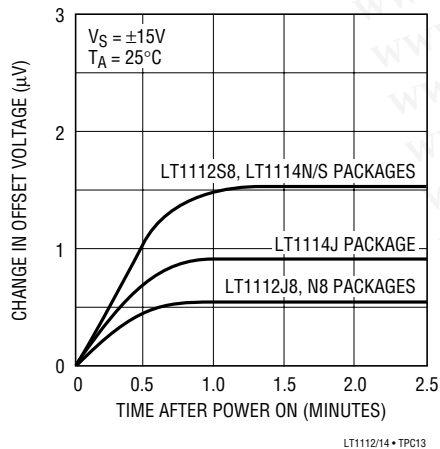

Long Term Stability of Three Representative Units

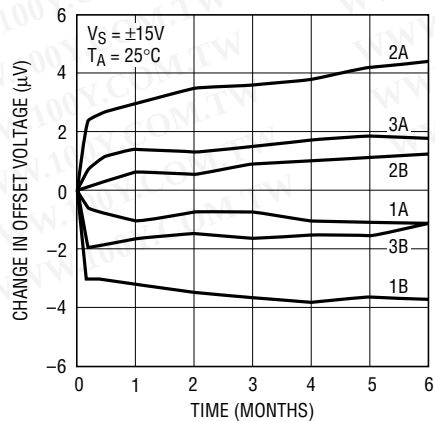


Supply Current per Amplifier vs Supply Voltage

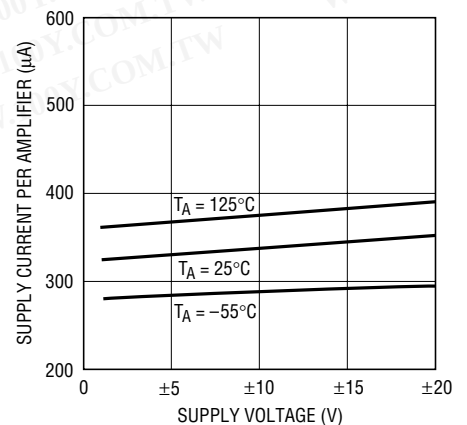


LT1112/LT1114

TYPICAL PERFORMANCE CHARACTERISTICS


**Minimum Supply Voltage vs Temp
Voltage Gain at Minimum Supply Voltage**

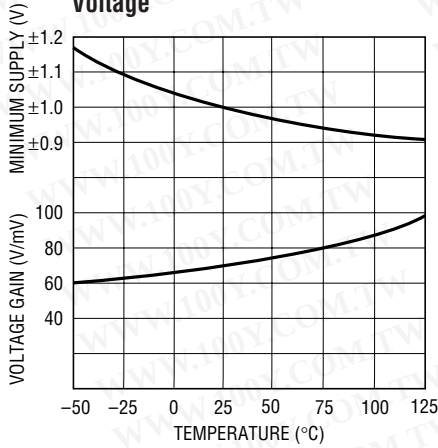


**Common Mode Range and
Voltage Swing with Respect to
Supply Voltages**

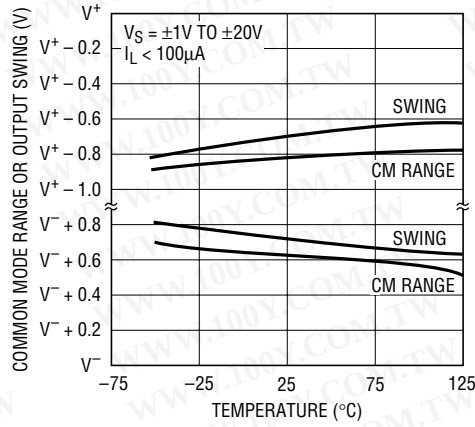


**Output Voltage Swing
vs Load Current**

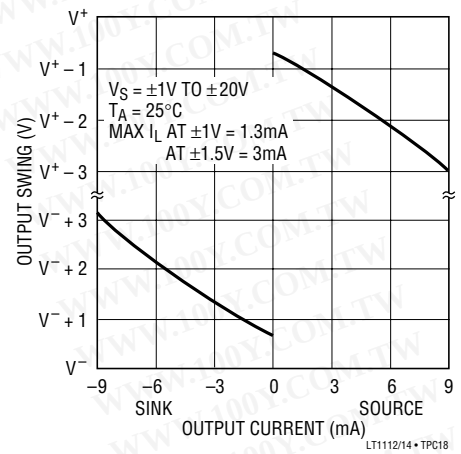


Voltage Gain

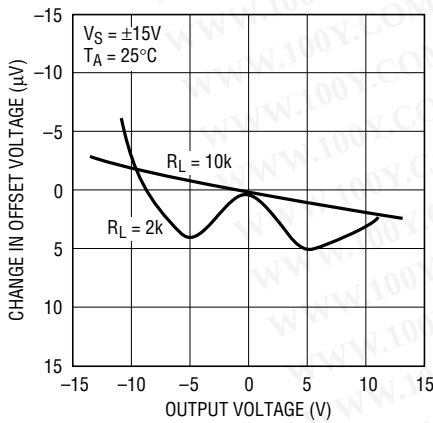


Voltage Gain vs Frequency

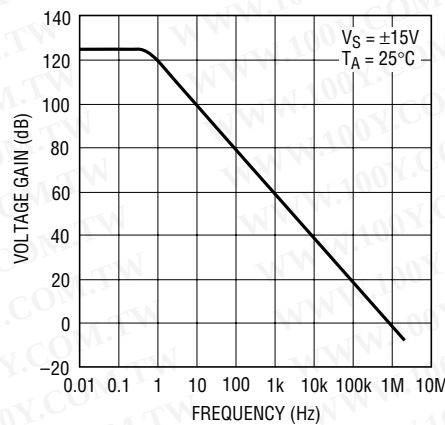


Gain, Phase Shift vs Frequency

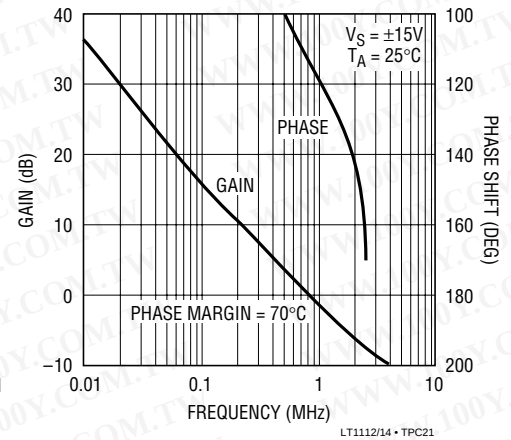


**Common Mode Rejection
vs Frequency**

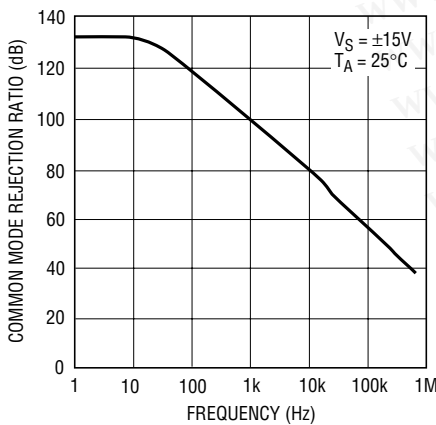

**Power Supply Rejection
vs Frequency**

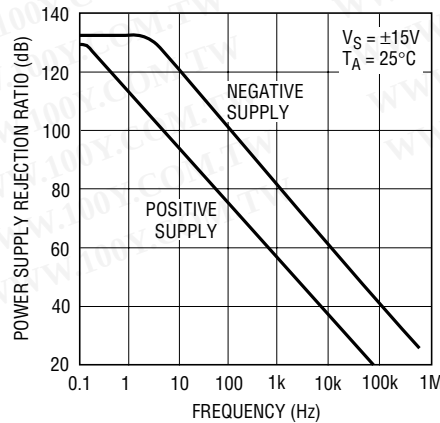


Channel Separation vs Frequency

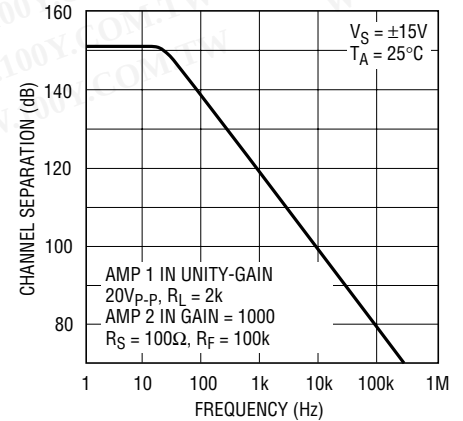


TYPICAL PERFORMANCE CHARACTERISTICS


Slew Rate, Gain-Bandwidth Product and Phase Margin vs Temperature

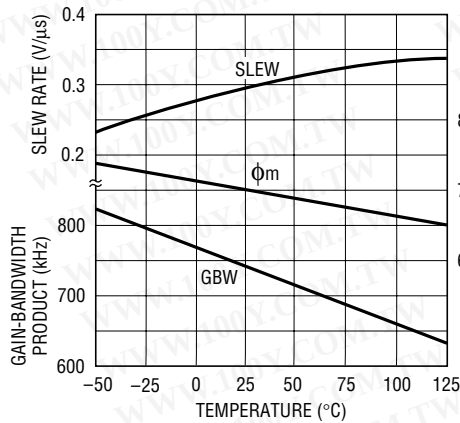


Closed-Loop Output Impedance

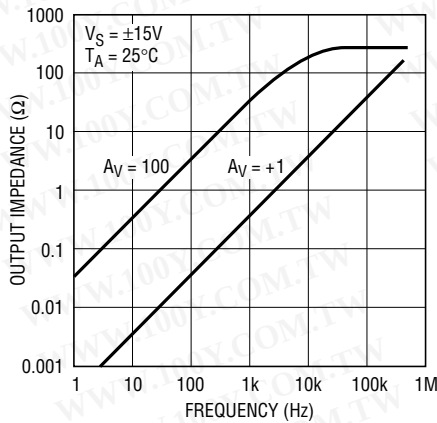

Capacitive Loading Handling

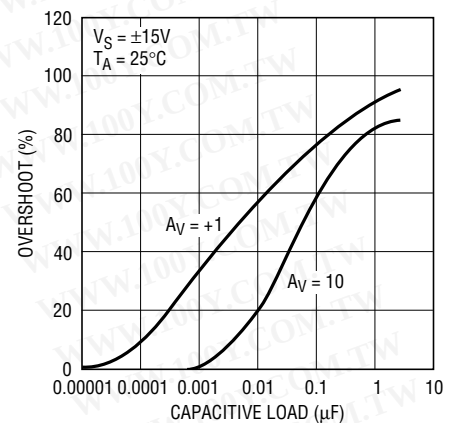


Small-Signal Transient Response

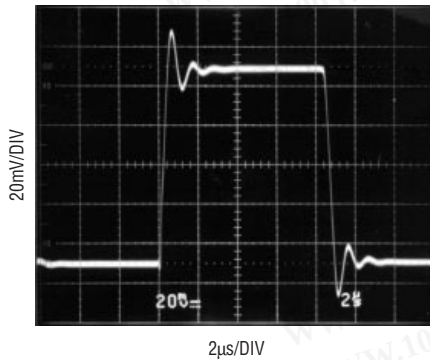


$A_V = +1$
 $C_L = 500\text{pF}$
 $V_S = \pm 15\text{V}$

Large-Signal Transient Response

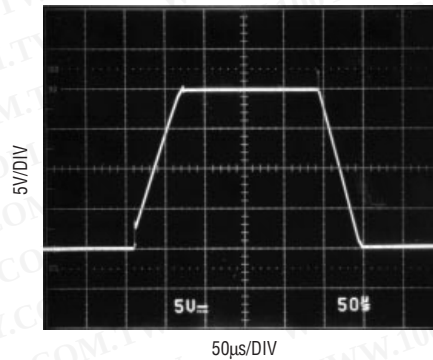

$A_V = +1$
 $R_F = 10\text{k}$
 $C_F = 100\text{pF}$
 $V_S = \pm 15\text{V}$

Undistorted Output Voltage vs Frequency

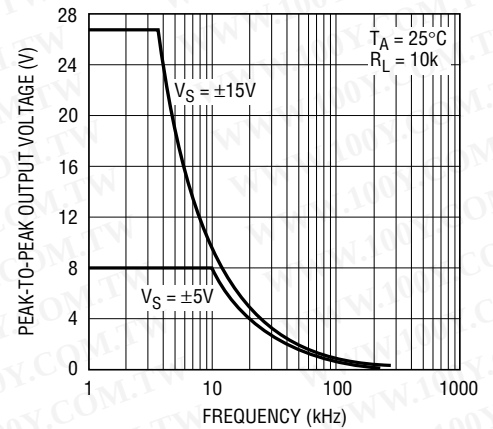

APPLICATIONS INFORMATION

The LT1112 dual and LT1114 quad in the plastic and ceramic DIP packages are pin compatible to and directly replace such precision op amps as the OP-200, OP-297, AD706 duals and OP-400, OP-497, AD704 quads with improved price/performance.

The LT1112 in the S8 surface mount package has the standard pin configuration, i.e., the same configuration as the plastic and ceramic DIP packages.

The LT1114 quad is offered in the narrow 16-pin surface mount package. All competitors are in the wide 16-pin package which occupies 1.8 times the area of the narrow package. The wide package is also 1.8 times thicker than the narrow package.

The inputs of the LT1112/1114 are protected with back-to-back diodes. In the voltage follower configuration, when the input is driven by a fast large-signal pulse ($>1V$), the input protection diodes effectively short the output to the input during slewing, and a current, limited only by the output short-circuit protection, will flow through the diodes.

The use of a feedback resistor is recommended because this resistor keeps the current below the short-circuit limit, resulting in faster recovery and settling of the output.

The input voltage of the LT1112/1114 should never exceed the supply voltages by more than a diode drop. However, the example below shows that as the input voltage exceeds the common mode range, the LT1112's


output clips cleanly, without any glitches or phase reversal. The OP-297 exhibits phase reversal. The photos also illustrate that both the input and output ranges of the LT1112 are within 800mV of the supplies. The effect of input and output overdrive on the other amplifiers in the LT1112 or LT1114 packages is negligible, as each amplifier is biased independently.

Advantages of Matched Dual and Quad Op Amps


In many applications the performance of a system depends on the matching between two operational amplifiers rather than the individual characteristics of the two op amps. Two or three op amp instrumentation amplifiers, tracking voltage references and low drift active filters are some of the circuits requiring matching between two op amps.

The well-known triple op amp configuration illustrates these concepts. Output offset is a function of the difference between the offsets of the two halves of the LT1112. This error cancellation principle holds for a considerable number of input referred parameters in addition to offset voltage and its drift with temperature. Input bias current will be the average of the two noninverting input currents (I_B^+). The difference between these two currents (ΔI_B^+) is the offset current of the instrumentation amplifier. Common mode and power supply rejections will be dependent only on the match between the two amplifiers (assuming perfect resistor matching).


Voltage Follower with Input Exceeding the Common Mode Range ($V_S = \pm 5V$)

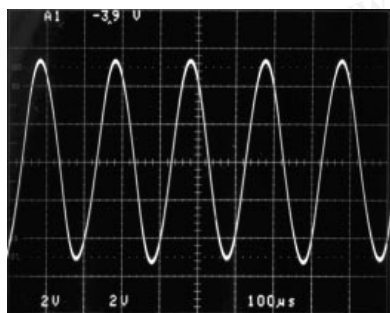

INPUT: $\pm 5.2V$ Sine Wave

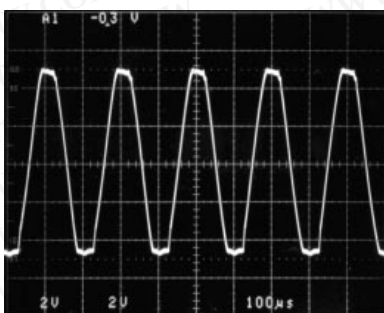


LT1112 Output

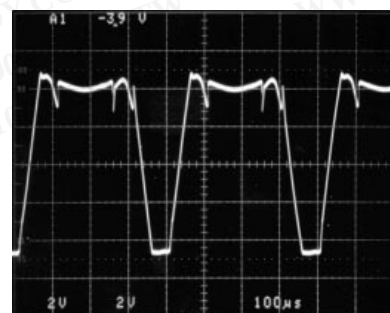

OP-297 Output

APPLICATIONS INFORMATION

Three Op Amp Instrumentation Amplifier

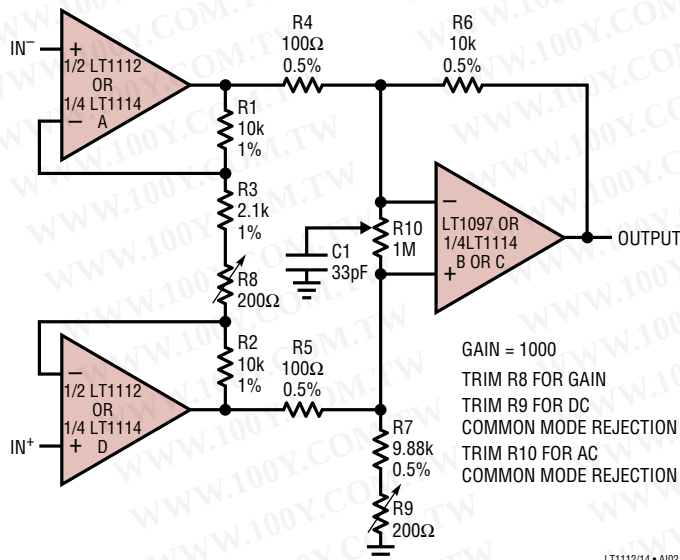

The concepts of common mode and power supply rejection ratio match (ΔCMRR and ΔPSRR) are best demonstrated with a numerical example:

Assume $\text{CMRR}_A = +1\mu\text{V/V}$ or 120dB,
and $\text{CMRR}_B = +0.75\mu\text{V/V}$ or 122.5dB,
then $\Delta\text{CMRR} = 0.25\mu\text{V/V}$ or 132dB;
if $\text{CMRR}_B = -0.75\mu\text{V/V}$ which is still 122.5dB,
then $\Delta\text{CMRR} = 1.75\mu\text{V/V}$ or 115dB.

Clearly the LT1112/LT1114, by specifying and guaranteeing all of these matching parameters, can significantly improve the performance of matching-dependent circuits.

Typical performance of the instrumentation amplifier:

Input offset voltage = 35 μV
Offset voltage drift = 0.3 $\mu\text{V}/^\circ\text{C}$
Input bias current = 80pA
Input offset current = 100pA
Input resistance = 800G Ω
Input noise = 0.42 $\mu\text{V}_{\text{P-P}}$

When the instrumentation amplifier is used with high impedance sources, the LT1114 is recommended because its CMRR vs frequency performance is better than the LT1112's. For example, with two matched 1M Ω source resistors, CMRR at 100Hz is 100dB with the LT1114, 76dB with the LT1112.

This difference is explained by the fact that capacitance between adjacent pins on an IC package is about 0.25pF (including package, socket and PC board trace capacitances).

On the dual op amp package, positive input A is next to the V⁻ pin (AC ground), while positive input B has no AC ground pin adjacent to it, resulting in a 0.25pF input capacitance mismatch. At 100Hz, 0.25pF represents a $6.4 \cdot 10^9$ input impedance mismatch, which is only 76dB higher than the 1M Ω source resistors.


On the quad package, all four inputs are adjacent to a power supply terminal—therefore, there is no mismatch.

LT1112/LT1114

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SCHEMATIC DIAGRAM

(1/2 LT1112, 1/4 LT1114)

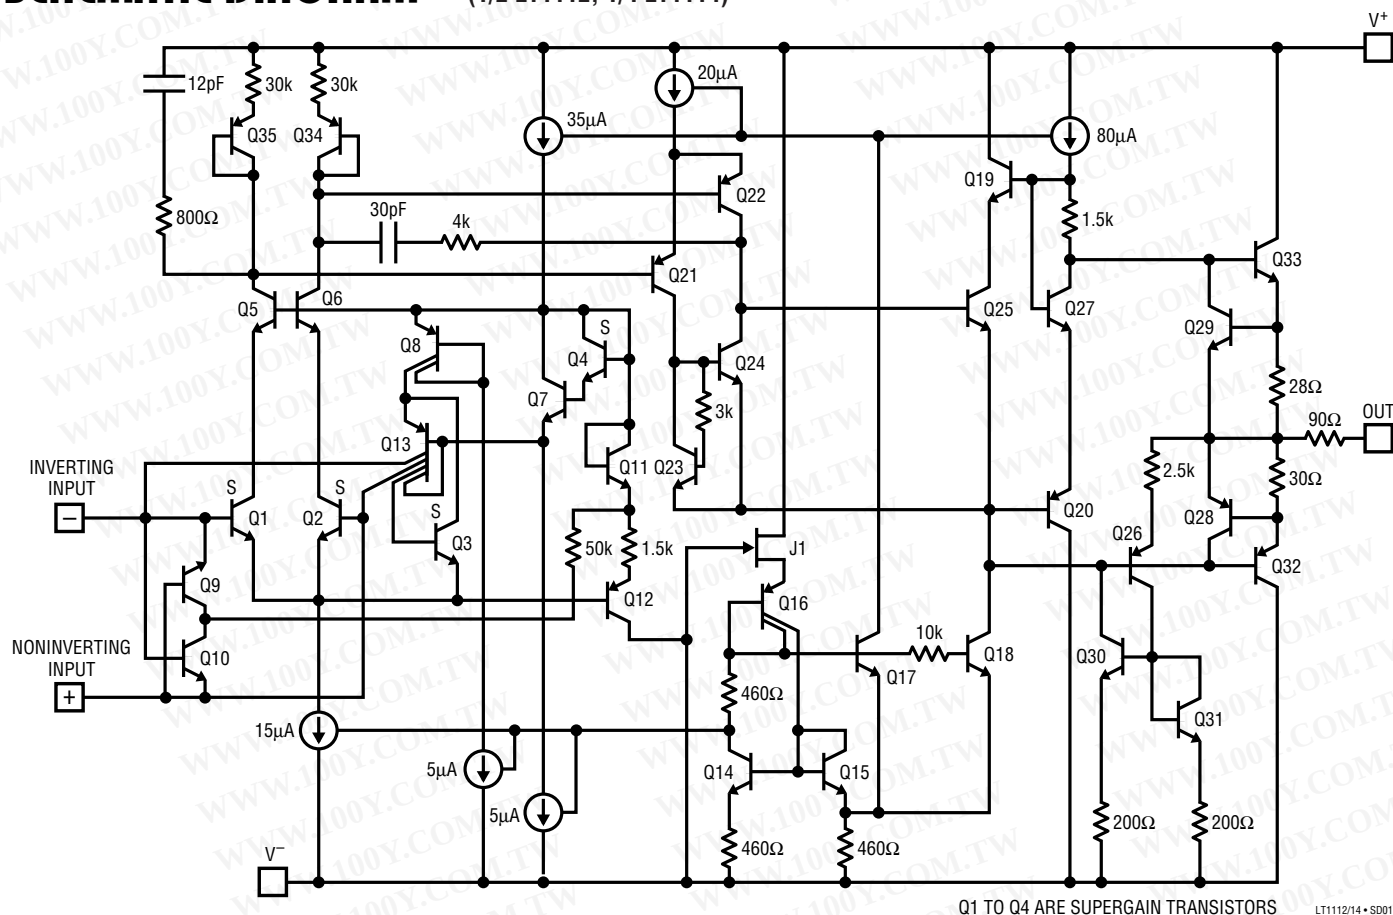


Q1 TO Q4 ARE SUPERGAIN TRANSISTORS

LT1112/14 • SD01


111214fa

PACKAGE DESCRIPTION

J8 Package 8-Lead Cerdip (Narrow .300 Inch, Hermetic) (Reference LTC DWG # 05-08-1110)

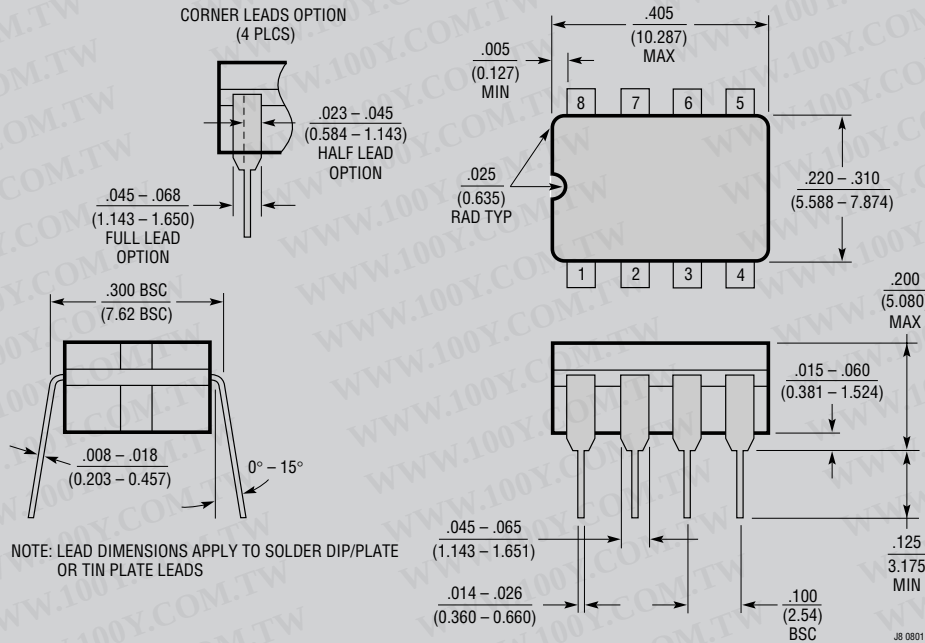

J Package 14-Lead Cerdip (Narrow .300 Inch, Hermetic) (Reference LTC DWG # 05-08-1110)

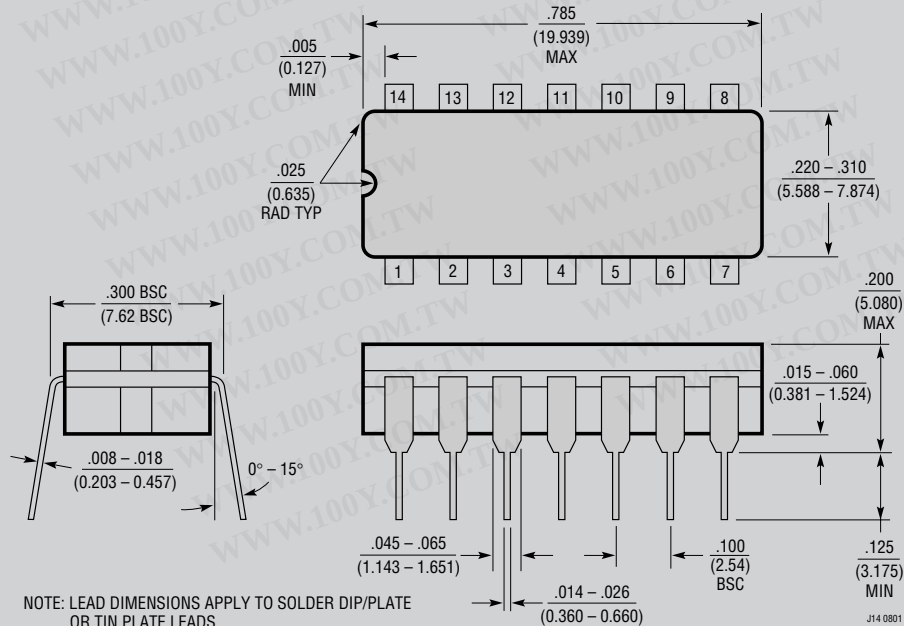


OBsolete PACKAGES

LT1112/LT1114

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


PACKAGE DESCRIPTION

N8 Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510)

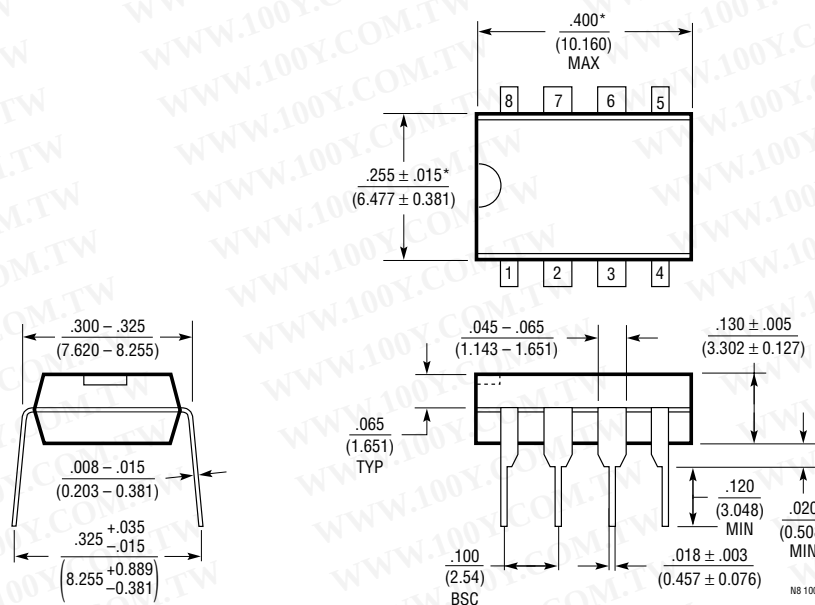

NOTE:
 1. DIMENSIONS ARE $\frac{\text{INCHES}}{\text{MILLIMETERS}}$
 *THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
 MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

N Package 14-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510)

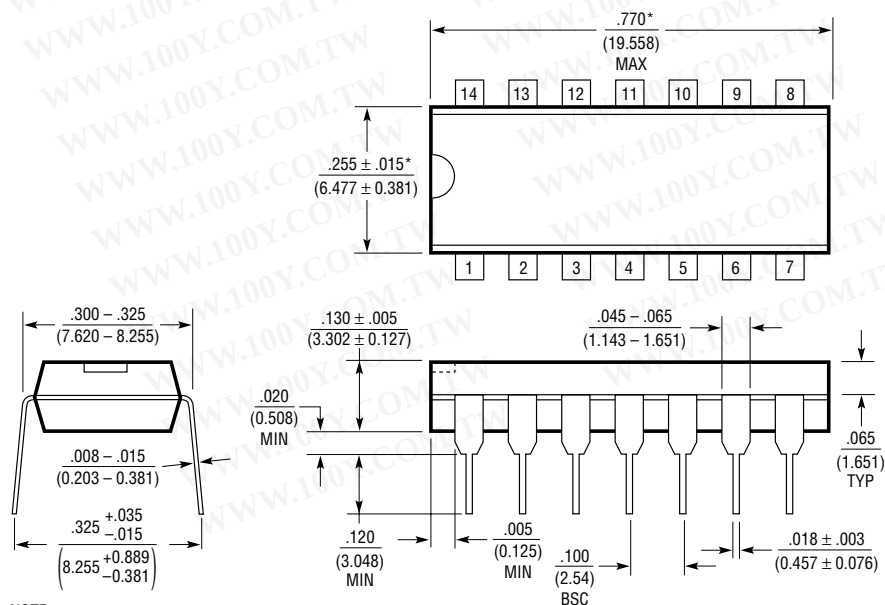



NOTE:
 1. DIMENSIONS ARE $\frac{\text{INCHES}}{\text{MILLIMETERS}}$
 *THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
 MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

N14 1002

111214fa

PACKAGE DESCRIPTION



S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

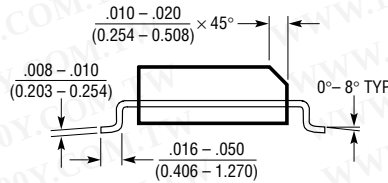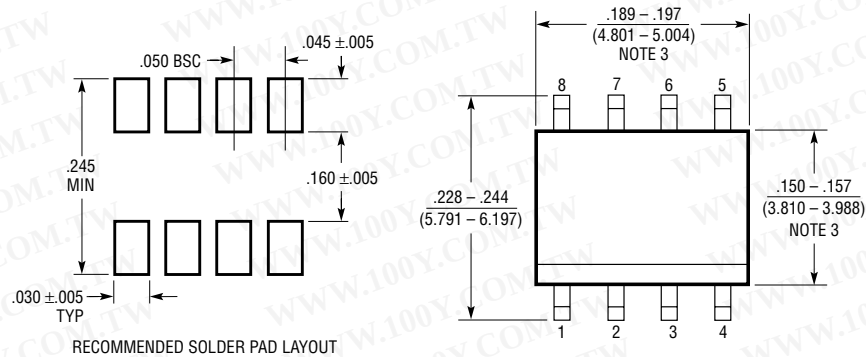

- NOTE:
1. DIMENSIONS IN INCHES (MILLIMETERS)
 2. DRAWING NOT TO SCALE
 3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

S08 0303

S Package 16-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

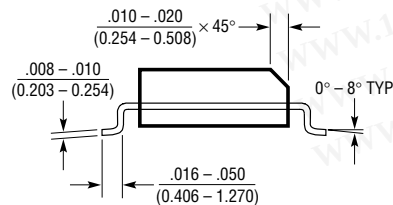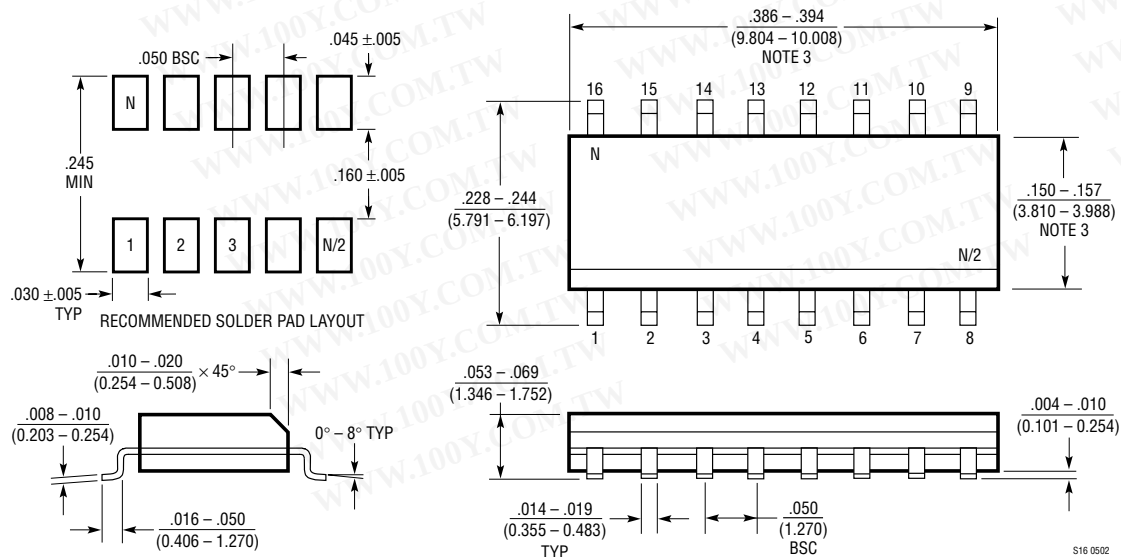


- NOTE:
1. DIMENSIONS IN INCHES (MILLIMETERS)
 2. DRAWING NOT TO SCALE
 3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

S16 0502

TYPICAL APPLICATION

Dual Buffered $\pm 0.617V$ Reference Powered by Two AA Batteries

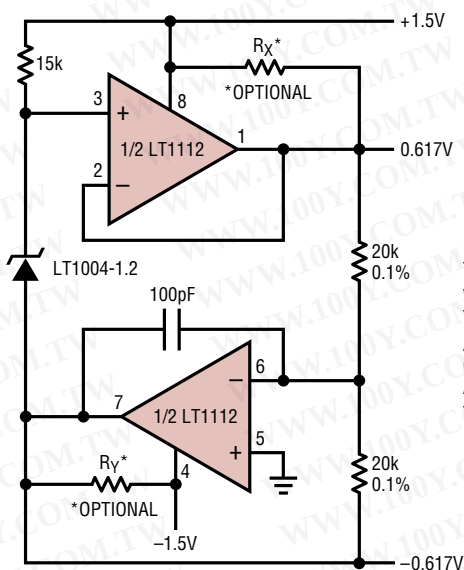

TOTAL SUPPLY CURRENT = $700\mu A$
 WORKS WITH BATTERIES DISCHARGED
 TO $\pm 1.3V$
 AT $\pm 1.5V$: MAXIMUM LOAD CURRENT = $800\mu A$;
 CAN BE INCREASED WITH OPTIONAL R_X, R_Y ;
 AT $R_X = R_Y = 750\Omega$ LOAD CURRENT = $2mA$
 TEMPERATURE COEFFICIENT LIMITED BY
 REFERENCE = $20ppm/^{\circ}C$

LT1112/14 • TA03

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1880	Rail-to-Rail Output, Picoamp Input Precision Op Amp	SOT-23
LT1881/LT1882	Dual/Quad Rail-to-Rail Output, Picoamp Input Precision Op Amp	C_{LOAD} Up to $1000pF$
LT1884/LT1885	Dual/Quad Rail-to-Rail Output, Picoamp Input Precision Op Amp	$9.5nV/\sqrt{Hz}$ Input Noise
LT6011/LT6012	Dual/Quad Rail-to-Rail Output, Picoamp Input Precision Op Amp	$135\mu A$ Supply Current, $14nV/\sqrt{Hz}$