

MM3Z2V4 Series

Surface Mount Zener Diodes

Features:

- *200mw Power Dissipation
- *Ideal for Surface Mountted Application
- *Zener Breakdown Voltage Range 2.4V to 75V

Mechanical Data:

- *Case : SOD-323 Molded plastic
- *Terminals: Solderable per MIL-STD-202, Method 208
- *Polarity: Cathode Indicated by Polarity Band
- *Marking: Marking Code (See Table on Page 3)
- *Weigh: 0.004grams(approx)


**SMALL SIGNAL
 ZENER DIODES
 200m WATTS**



SOD-323

SOD-323 Outline Dimensions

Unit:mm

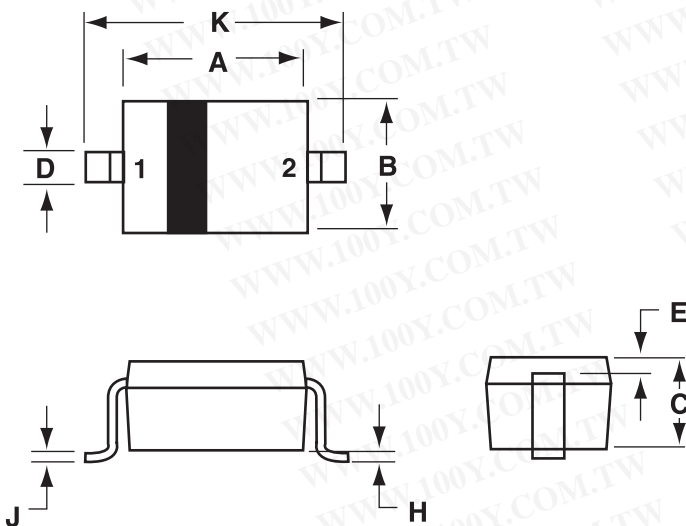

| Dim | MILLMETERS | |
|-----|------------|-------|
| | Min | Max |
| A | 1.60 | 1.80 |
| B | 1.15 | 1.35 |
| C | 0.80 | 1.00 |
| D | 0.25 | 0.40 |
| E | 0.15REF | |
| H | 0.00 | 0.10 |
| J | 0.089 | 0.377 |
| K | 2.30 | 2.70 |

**PIN 1.CATHODE
 2.ANODE**

MM3Z2V4 Series

Maximum Ratings and Electrical Characteristics (TA=25 °C Unless Otherwise Noted)


| Characteristics | Symbol | Value | Unit |
|---|---------|------------|------|
| Total Power Dissipation on FR-5 Board ⁽¹⁾ @TA=25 °C | PD | 200 | mW |
| Thermal Resistance Junction to Ambient Air ⁽¹⁾ | RθJA | 625 | °C/W |
| Forward Voltage @ IF=10mA | VF | 0.9 | V |
| Junction and Storage Temperature Range | Tj,TSTG | -65 to+150 | °C |

NOTES:1.FR-4 Mininum Pad

ELECTRICAL CHARACTERISTICS

(TA = 25 °C unless otherwise noted, VF = 0.9 V Max. @ IF = 10 mA)

| Symbol | Parameter |
|--------|---|
| VZ | Reverse Zener Voltage @ IZT |
| IZT | Reverse Current |
| ZZT | Maximum Zener Impedance @ IZT |
| IR | Reverse Leakage Current @ VR |
| VR | Reverse Voltage |
| IF | Forward Current |
| VF | Forward Voltage @ IF |
| QVZ | Maximum Temperature Coefficient of VZ |
| C | Max. Capacitance @ VR = 0 and f = 1 MHz |

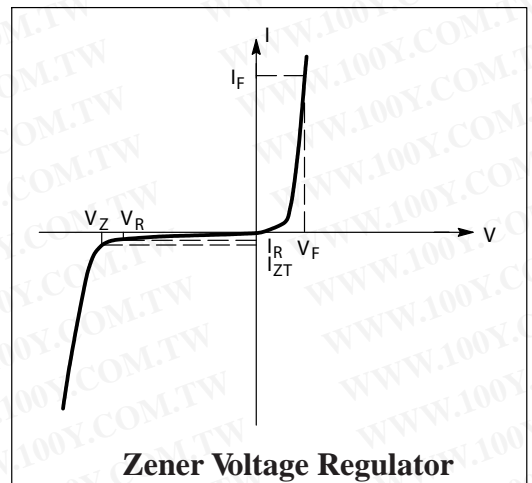

Device Marking

| Item | Marking | Equivalent Circuit Diagram |
|----------------|---|---|
| MM3Z2V4 Series | XX=Specific Device Code (See Table on page3) | <p style="text-align: center;">1 Cathode 2 Anode</p> |

MM3Z2V4 Series

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 0.9\text{ V Max.}$ @ $I_F = 10\text{ mA}$ for all types)

| Device | Device Marking | Zener Voltage (Note) | | | | Zener Impedance | | | Leakage Current | | ΘV_Z (mV/k) @ I_{ZT} | | C @ $V_R = 0$ f=1MHz pF |
|---------|----------------|----------------------|-------|------|------------|------------------------|---------------------|-----|-----------------|-------|--------------------------------------|------|----------------------------------|
| | | V_Z (Volts) | | | @ I_{ZT} | Z_{ZT} @ I_{ZT} | Z_{ZK} @ I_{ZK} | | I_R @ V_R | | Min | Max | |
| | | Min | Nom | Max | mA | Ω | Ω | mA | μA | Volts | Min | Max | |
| MM3Z2V4 | 00 | 2.2 | 2.4 | 2.6 | 5 | 100 | 1000 | 0.5 | 50 | 1.0 | -3.5 | 0 | 450 |
| MM3Z2V7 | 01 | 2.5 | 2.7 | 2.9 | 5 | 100 | 1000 | 0.5 | 20 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V0 | 02 | 2.8 | 3.0 | 3.2 | 5 | 100 | 1000 | 0.5 | 10 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V3 | 05 | 3.1 | 3.3 | 3.5 | 5 | 95 | 1000 | 0.5 | 5 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V6 | 06 | 3.4 | 3.6 | 3.8 | 5 | 90 | 1000 | 0.5 | 5 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V9 | 07 | 3.7 | 3.9 | 4.1 | 5 | 90 | 1000 | 0.5 | 3 | 1.0 | -3.5 | -2.5 | 450 |
| MM3Z4V3 | 08 | 4.0 | 4.3 | 4.6 | 5 | 90 | 1000 | 0.5 | 3 | 1.0 | -3.5 | 0 | 450 |
| MM3Z4V7 | 09 | 4.4 | 4.7 | 5.0 | 5 | 80 | 800 | 0.5 | 3 | 2.0 | -3.5 | 0.2 | 260 |
| MM3Z5V1 | 0A | 4.8 | 5.1 | 5.4 | 5 | 60 | 500 | 0.5 | 2 | 2.0 | -2.7 | 1.2 | 225 |
| MM3Z5V6 | 0C | 5.2 | 5.6 | 6.0 | 5 | 40 | 200 | 0.5 | 1 | 2.0 | -2.0 | 2.5 | 200 |
| MM3Z6V2 | 0E | 5.8 | 6.2 | 6.6 | 5 | 10 | 100 | 0.5 | 3 | 4.0 | 0.4 | 3.7 | 185 |
| MM3Z6V8 | 0F | 6.4 | 6.8 | 7.2 | 5 | 15 | 160 | 0.5 | 2 | 4.0 | 1.2 | 4.5 | 155 |
| MM3Z7V5 | 0G | 7.0 | 7.5 | 7.9 | 5 | 15 | 160 | 0.5 | 1 | 5.0 | 2.5 | 5.3 | 140 |
| MM3Z8V2 | 0H | 7.7 | 8.2 | 8.7 | 5 | 15 | 160 | 0.5 | 0.7 | 5.0 | 3.2 | 6.2 | 135 |
| MM3Z9V1 | 0K | 8.5 | 9.1 | 9.6 | 5 | 15 | 160 | 0.5 | 0.2 | 7.0 | 3.8 | 7.0 | 130 |
| MM3Z10V | 0L | 9.4 | 10 | 10.6 | 5 | 20 | 160 | 0.5 | 0.1 | 8.0 | 4.5 | 8.0 | 130 |
| MM3Z11V | 0M | 10.4 | 11 | 11.6 | 5 | 20 | 160 | 0.5 | 0.1 | 8.0 | 5.4 | 9.0 | 130 |
| MM3Z12V | 0N | 11.4 | 12 | 12.7 | 5 | 25 | 80 | 0.5 | 0.1 | 8.0 | 6.0 | 10 | 130 |
| MM3Z13V | 0P | 12.4 | 13.25 | 14.1 | 5 | 30 | 80 | 0.5 | 0.1 | 8.0 | 7.0 | 11 | 120 |
| MM3Z15V | 0T | 14.3 | 15 | 15.8 | 5 | 30 | 80 | 0.5 | 0.05 | 10.5 | 9.2 | 13 | 110 |
| MM3Z16V | 0U | 15.3 | 16.2 | 17.1 | 5 | 40 | 80 | 0.5 | 0.05 | 11.2 | 10.4 | 14 | 105 |
| MM3Z18V | 0W | 16.8 | 18 | 19.1 | 5 | 45 | 80 | 0.5 | 0.05 | 12.6 | 12.4 | 16 | 100 |
| MM3Z20V | 0Z | 18.8 | 20 | 21.2 | 5 | 55 | 100 | 0.5 | 0.05 | 14.0 | 14.4 | 18 | 85 |
| MM3Z22V | 10 | 20.8 | 22 | 23.3 | 5 | 55 | 100 | 0.5 | 0.05 | 15.4 | 16.4 | 20 | 85 |
| MM3Z24V | 11 | 22.8 | 24.2 | 25.6 | 5 | 70 | 120 | 0.5 | 0.05 | 16.8 | 18.4 | 22 | 80 |
| MM3Z27V | 12 | 25.1 | 27 | 28.9 | 2 | 80 | 300 | 0.5 | 0.05 | 18.9 | 21.4 | 25.3 | 70 |
| MM3Z30V | 14 | 28 | 30 | 32 | 2 | 80 | 300 | 0.5 | 0.05 | 21.0 | 24.4 | 29.4 | 70 |
| MM3Z33V | 18 | 31 | 33 | 35 | 2 | 80 | 300 | 0.5 | 0.05 | 23.2 | 27.4 | 33.4 | 70 |
| MM3Z36V | 19 | 34 | 36 | 38 | 2 | 90 | 500 | 0.5 | 0.05 | 25.2 | 30.4 | 37.4 | 70 |
| MM3Z39V | 20 | 37 | 39 | 41 | 2 | 130 | 500 | 0.5 | 0.05 | 27.3 | 33.4 | 41.2 | 45 |
| MM3Z43V | 21 | 40 | 43 | 46 | 2 | 150 | 500 | 0.5 | 0.05 | 30.1 | 37.6 | 46.6 | 40 |
| MM3Z47V | 1A | 44 | 47 | 50 | 2 | 170 | 500 | 0.5 | 0.05 | 32.9 | 42.0 | 51.8 | 40 |
| MM3Z51V | 1C | 48 | 51 | 54 | 2 | 180 | 500 | 0.5 | 0.05 | 35.7 | 46.6 | 57.2 | 40 |
| MM3Z56V | 1D | 52 | 56 | 60 | 2 | 200 | 500 | 0.5 | 0.05 | 39.2 | 52.2 | 63.8 | 40 |
| MM3Z62V | 1E | 58 | 62 | 66 | 2 | 215 | 500 | 0.5 | 0.05 | 43.4 | 58.8 | 71.6 | 35 |
| MM3Z68V | 1F | 64 | 68 | 72 | 2 | 240 | 500 | 0.5 | 0.05 | 47.6 | 65.6 | 79.8 | 35 |
| MM3Z75V | 1G | 70 | 75 | 79 | 2 | 255 | 500 | 0.5 | 0.05 | 52.5 | 73.4 | 88.6 | 35 |

Note: Zener voltage is measured with a pulse test current I_Z at an ambient temperature of 25°C .

MM3Z2V4 Series

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical Electrical Characteristics

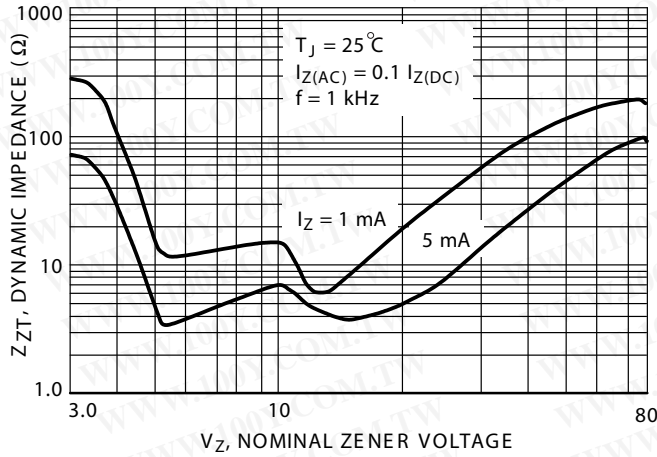


FIG.1 Effect of Zener Voltage on Zener Impedance

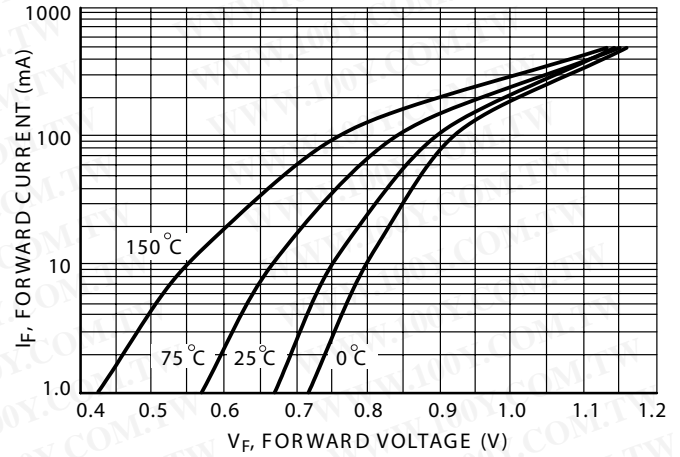


FIG.2 Typical Forward Voltage

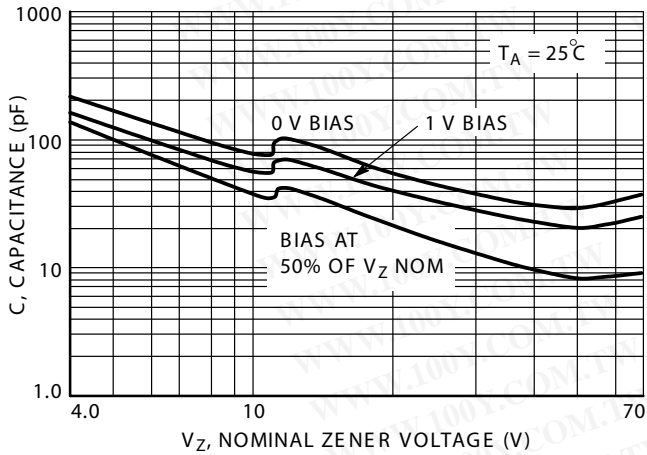


FIG.3 Typical Capacitance

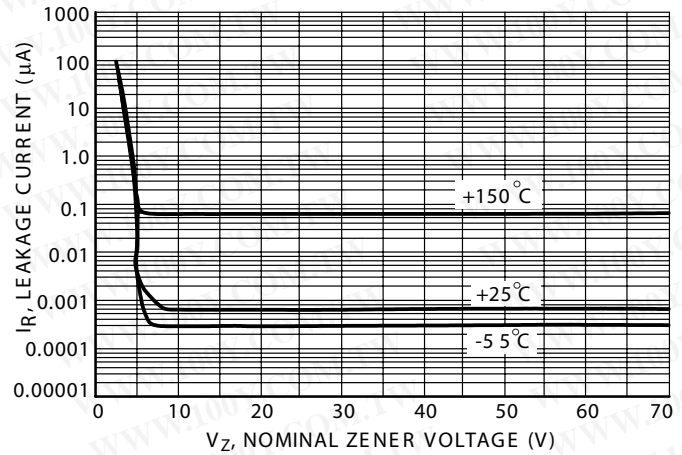


FIG.4 Typical Leakage Current

MM3Z2V4-G Series

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical Electrical Characteristics

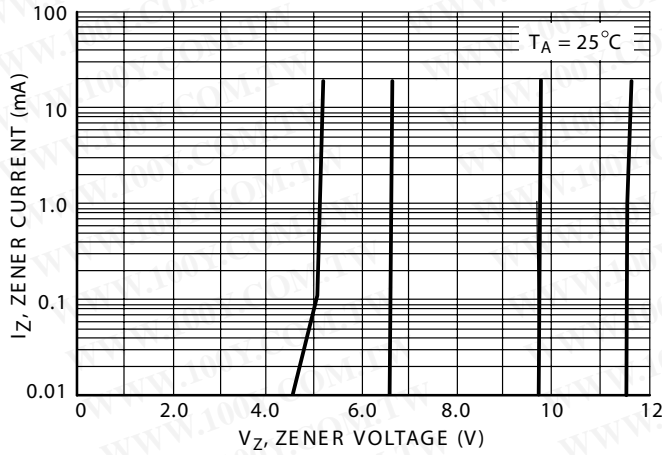


FIG.5 Zener Voltage versus Zener Current
(V_Z Up to 12 V)

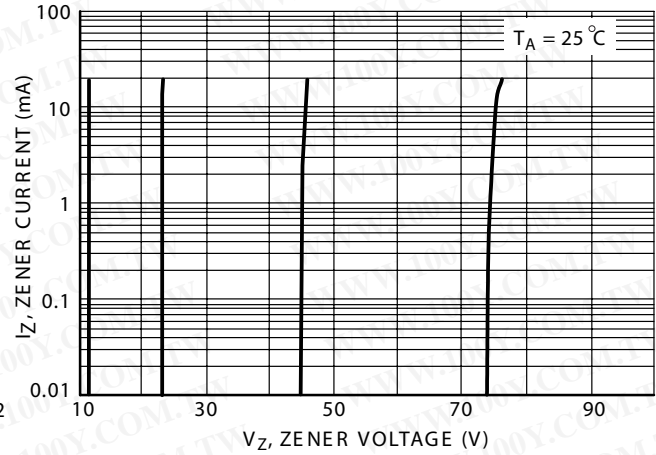


FIG.6 Zener Voltage versus Zener Current
(12 V to 75 V)

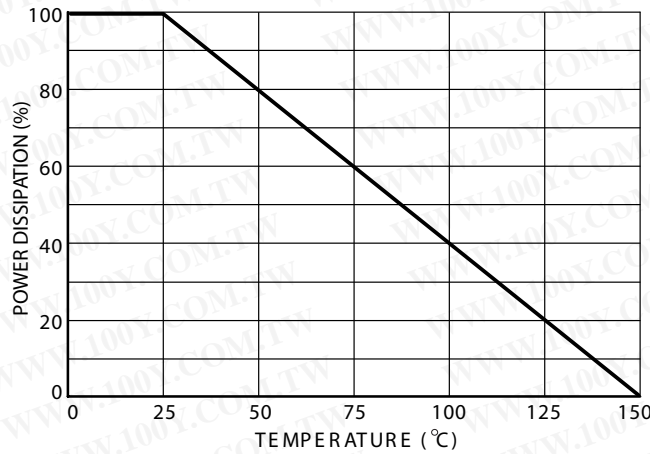


FIG.7 Steady State Power Derating