


PIR-505A 拉線式全方位感應器



產品特點:

1. 只要是 E27 螺旋頭燈座皆適用。
2. 黑暗環境中，人與動物接近時均會自動亮燈，離開後自動關燈。
3. 獨立式溫感 SENSOR 最適合有燈罩之照明器具。
4. 直接裝進燈座無需另外的配線工程。
5. 亮燈時間可依使用場所及用途有三種選擇方式。
6. 22W 以下的省電燈泡也適用(省電燈泡依使用方式及使用頻率會減短使用壽命)。
7. 附加之雙面膠帶與夾子可固定溫感 SENSOR 至所希望的角度與位置，並可隨時調整。
8. 有老人小孩的家庭可免除關燈的麻煩。
9. 有現成的燈座或照明器具可直接轉變成感應式燈具。
10. 鎖緊後可迴轉 355°

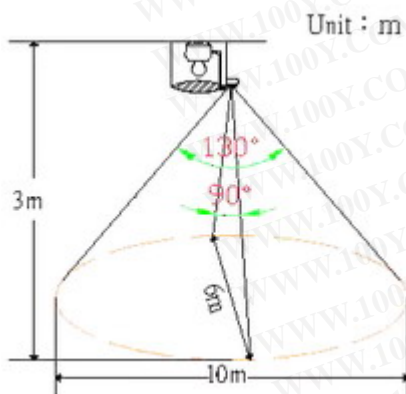

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

產品規格

Model No.	PIR-505A&B Extended-In Light Sensor
Power Supply	AC100~240V 50/60HZ
Max. Load	Incandescent lamp: 60W , Energy saving lamp: 23W
Power Consumption	standby: <1.3 W
Sensing Angle	R&L:< 130° , Up & Down: < 90°(at 25°C)
Sensing Distance	25° C <8m
Illumination	Under 3LUX: sensor is active , over 30LUX: sensor not active
Off Delay time	Short time : 10 sec.(night) Mid. time : 90 sec.(night) Long time : 330 sec.(night)
Warm-up Procedure	Install at daytime: the lamp will flash 3 times after energized. Install at nighttime: the lamp will light for about 20 seconds then automatically shut off after energized
Dimension	6×6×7.5cm
Weight	85g
Wiring	Rotating socket

適用居家，辦公等场所



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

認證:

