

PIR-605 隱藏式感應器



產品特色:


- 迷你機板搭配裝潢質感最美，裸板可隱藏於各類型燈具內整合最實用。
- 感應有 ABCD 四種不同頭型，可搭配不同造型燈具及調整感應角度。
- 獨特線路及補光設計，不怕火花、突波及雜訊。
- 任何燈具均可感應，如鎢絲燈、日光燈、省電燈或 LED 燈。
- 有時間及日夜功能旋鈕，可依情境需求調整。

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

產品規格:

Model No.	PIR-.605 Hide Extend Mini Sensor
Power Supply	AC100V ~ 240V, 50HZ/60HZ
Max. Load	Incandescent lamp: 600W, Fluorescent lamp: 200W, Energy saving lamp: 240W and LED lamp. Fuse: 5A
Power Consumption	standby: 220V-35mA / 110V-17mA
Sensing Angle	R&L:<130°, UP&DOWN:<90° (at 25°C)
Sensing Distance	25°C < 8m
Off Delay time	15~600 sec.
Warm-up Procedure	Install at daytime: the lamp will flash 3 times after energized. Install at nighttime: the lamp will light for about 30 seconds then automatically shut off after energized.
Dimension	8.5cm × 3.4cm × 2.8cm
Weight	62g
Wiring	2IN/2OUT

Instructions (Three adjustable knobs provided as described below):



Adjust for day & night.

Sun: The sensor operates when people arrive no matter daytime or night.

Moon: It only operates at dark surroundings.




Adjust for the off delay time.

15: about 15 seconds. 600: about 600 seconds


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Sensing Range and Distance:

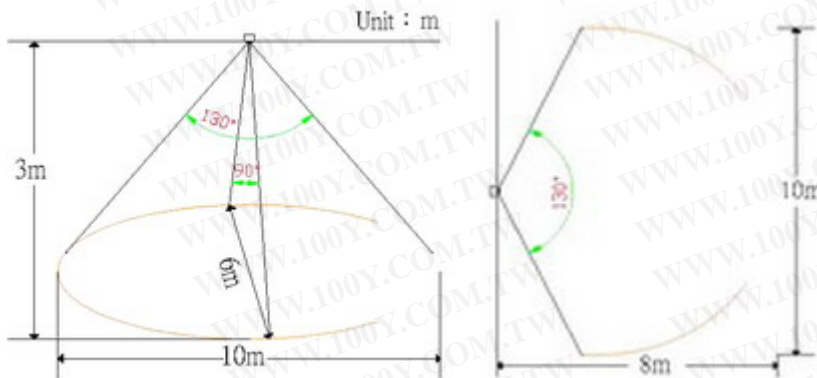

Wiring Diagram:

PIR-605 Wiring Diagram

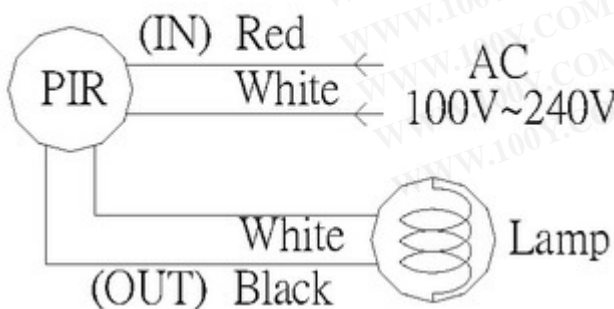

Application place:



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Patent & Certificate:

