

PRODUCT STRUCTURE ANALYSIS


内部结构 解析

接头主体部位采用黄铜镀镍材质，夹紧件采用(PA)尼龙塑料制成，密封圈和O型密封圈采用(NBR)丁腈橡胶制成。



产品参数

		规格	M型
材质	铜镀镍+尼龙材质	防水等级	IP68等级
包装	塑料袋+纸箱	特点	密封防水防尘、防酸碱

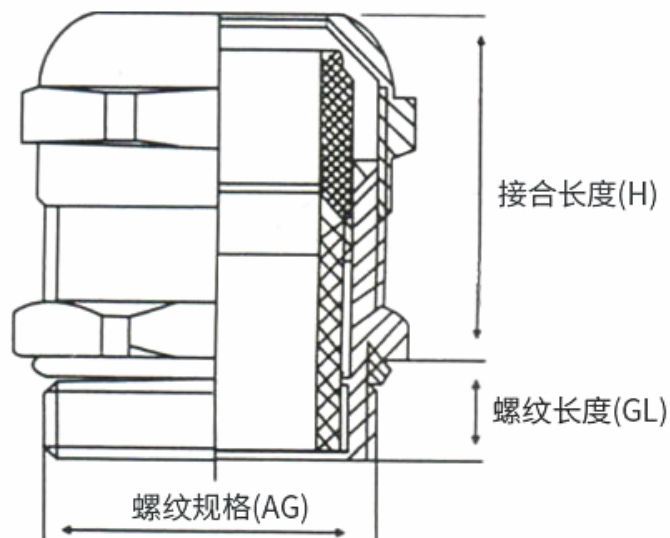

M型

规格	适用电缆	螺纹外径	机板口径	螺纹长度GL	接合长度H	扳手径
M12*1.5	6.5~3	12	12-12.2	7	19	14
M14*1.5	6.5~3	14	14-14.2	7	19	17
M16*1.5	8~4	16	16-16.2	8	20	18
M18*1.5	10~5	18	18-18.2	8	21	20
M20*1.5	12~6	20	20-20.2	8	22	22
M22*1.5	10~14	22	22-22.2	8	23	24
M24*1.5	10~14	24	24-24.2	9	25	24/27
M25*1.5	10~14	25	25-25.2	9	25	24/27
M27*1.5	18~13	27	27-27.2	9	27	30
M30*1.5	18~13	30	30-30.2	9	29	30/32
M32*1.5	22~15	32	32-32.2	10	29	35
M33*1.5	22~15	33	33-33.2	10	29	35
M36*1.5	25~18	36	36-36.2	10	31	40
M40*1.5	25~18	40	40-40.2	11	31	40/45
M42*1.5	30~22	42	42-42.2	11	35	45
M50*1.5	38~32	50	50-50.2	12	37	50/55
M60*1.5	44~37	60	60-60.2	13	38	64