勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

20W Single Output Series

- High reliability, low cost
- Built-in EMI filter
- 100% full load burn-in test
- Protections: overload/ short circuit
- 1 year warranty
- F602 111 x 78 x 36(mm)

AC input voltage range	170~264VAC (210~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 30A/230V
Input leakage current	＜0.5mA/ 230VAC
Line regulation (full load)	≤±0.5%
Output voltage adjust range	±10%
Output overload protection	110~150%
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temp. & humidity	-10℃~+50℃, 20%~90%RH (non condensing)
Storage temp. & humidity	-20℃~+85℃, 20%~95%RH (non condensing)
Safety standards	design meet GB4943, UL60950, EN60950
EMC standards	design meet GB9254, EN55022 classA EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection

Model	DC Output		Load regul.	R&N	Efficiency
HF20W-S-5	5V	4.0A	0.5%	60mV	70%
HF20W-S-12	12V	2.0A	0.5%	80mV	75%
HF20W-S-15	15V	1.5A	0.5%	100mV	76%
HF20W-S-24	24V	1.0A	0.5%	100mV	78%
HF20W-S-48	48V	0.5A	0.5%	150mV	80%

* 3~48VDC output all available.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw
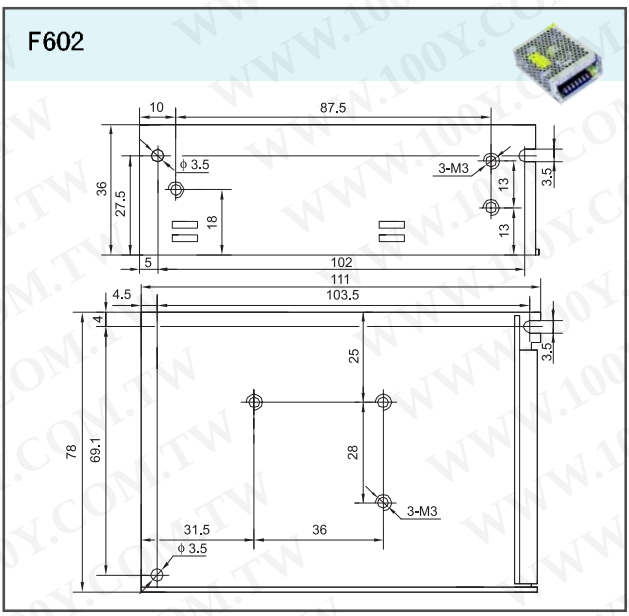
Drawing