


擴充套管

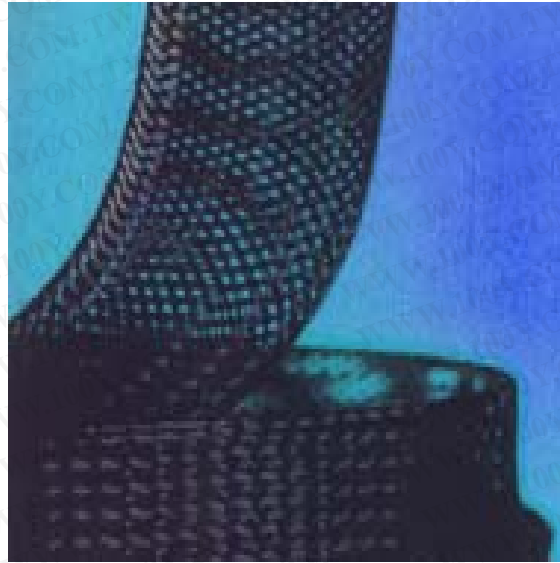

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

描述:

POLYFLEX AND POLYFLEX FLAME RETARDANT EXPANDABLE MONOFILAMENT SLEEVINGS ARE PRODUCED BY BRAIDING SPECIALLY FORMULATED P.E.T (POLYETHYLENE TEREPHTHALATE) MONOFILAMENTS INTO A CYLINDRICAL SLEEVE. POLYFLEX IS A TOUGH AND LIGHTWEIGHT SLEEVING THAT DEMONSTRATES EXCELLENT CHEMICAL AND FUNGUS RESISTANCE WHILE PROVIDING GOOD MECHANICAL PROPERTIES. THE OPEN WEAVE CONSTRUCTION ALLOWS EACH SIZE TO EXPAND TO THREE TIMES ITS ORIGINAL DIAMETER. THIS EXPANSION COMBINED WITH EXTREME FLEXIBILITY MAKES POLYFLEX SLEEVING EASY TO APPLY OVER IRREGULAR SHAPES. POLYFLEX IS ALSO AVAILABLE IN TIGHT WEAVE AND HEAVY DUTY CONSTRUCTIONS FOR THOSE SPECIAL APPLICATIONS.

特性:

STANDARD COLOR: BLACK, WHITE OTHER COLORS ARE AVAILABLE UPON REQUEST.

规格:

ITEM NO.	SIZE RANGE (mm)
R419003	3mm~12mm
R419006	6mm~24mm
R419010	10mm~27.5mm
R419012	12mm~33mm
R419019	19mm~45mm
R419030	30mm~55mm
R419040	40mm~75mm
R419050	50mm~90mm

STANDARD CHARACTERISTIC

PROPERTY	POLYFLEX PERFORMANCE
Tensile strength	100,000 psi
Elongation	20%
Specific gravity	1.31
Moisture absorption 24 hours	0.08%
Max. Operating temp.	150°C
Low temp. Flexibility	-70°C
Copper corrosivity	No effect

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)