

UL 2468 FLAT RIBBON WIRE 並排線

UL Subject 758
 CSA Standard

UL FILE NO: E108485
 CSA FILE NO: LL84687

▲ 說明

- 導體使用鍍錫銅，先絞後鍍或先鍍後絞再鍍之絞線軟銅。
- 額定溫度：80°C
- 額定電壓：300Volts
- 可通過VW-1垂直型耐燃測試。

▲ 應用：

- 用於電器、電腦設備

Product Description:


- Tinned or top-coated, stranded copper conductor.
- Rated temperature: 80°C.
- Rated voltage: 300 volts.
- Passes VW-1 vertical flame test.

Applications:

- For use in internal wiring of appliances, computers.

構造及電氣性能

structure & electric properties

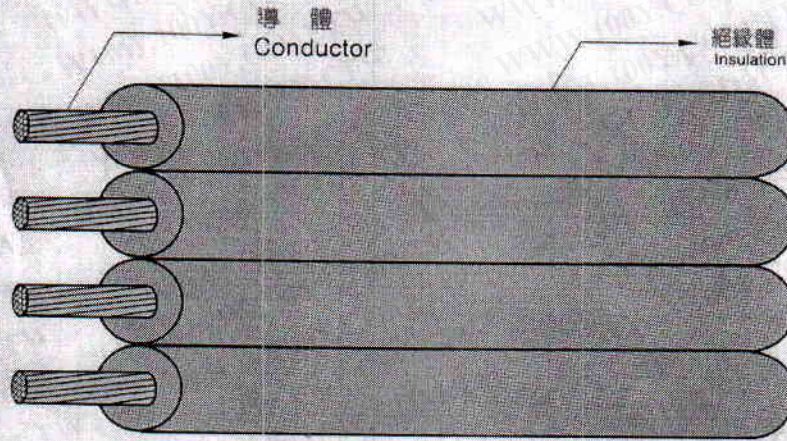

無間距
 <No. pitch>

UL 2468 CSA AWM I A/B	額定 Range		導體 Conductor		芯 數 No	絕緣體 Insulation		最大導體 阻抗 Maximum Conductor Resistance Ω-Km	最小絕緣 阻抗 Minimum Insulation Resistance MΩ-Km	絕緣耐電 壓(VAC/min) Insulation Potential Strength
	溫度 Temp °C	電壓 Voltage V	線號 AWG	構成 No./mm		厚度 Thickness mm	外徑 O.D. mm			
并 排 線	80°C	300V	28	7/0.127	2	0.40	1.10 x 2.20	248	15	2000
			"	"	3		1.10 x 3.30			
			"	"	4		1.10 x 4.40			
			26	7/0.160	2		1.30 x 2.60	152		
			"	"	3		1.30 x 3.90			
			"	"	4		1.30 x 5.20			
			24	11/0.160	2		1.45 x 2.90	88.6		
			"	"	3		1.45 x 4.35			
			"	"	4		1.45 x 5.80			
			22	17/0.160	2		1.60 x 3.20	62.5		
			"	"	3		1.60 x 4.80			
			"	"	4		1.60 x 5.60			
			20	21/0.180	2		1.85 x 3.70	39.5		
			"	"	3		1.85 x 5.55			
			18	34/0.180	2		2.10 x 4.20	24.4		
			"	"	3		2.10 x 6.30			