

零件編碼原則 Part Number Configuration:

J2 102 M 3A Y5V S T 5 L E

(1) (2) (3) (4) (5) (6) (編帶) (7) (8) (9)

(1) 產品類別 DC capacitors

(2) 標稱容量 Rated capacitance

(3) 誤差 Tolerance on rated capacitance

(4) 額定電壓 Rated Voltage

(5) 溫度特性 Type code Temperature Characteristic:

(B)Y5P, (F)Y5V, (E)Y5U.NPO.SL

(6) 腳型 Lead shape:

S(直角), I(內彎), O(外彎), X(前後彎)

(7) 腳距 Pin pitch :



5.0、7.5、9.5、10.0、12.5

(8) 腳長 Lead length:

3—30mm

(9) 塗裝材料 Coating material:

E 代表 EPOXY, 藍色; C 代表 Yellow 土黃色.

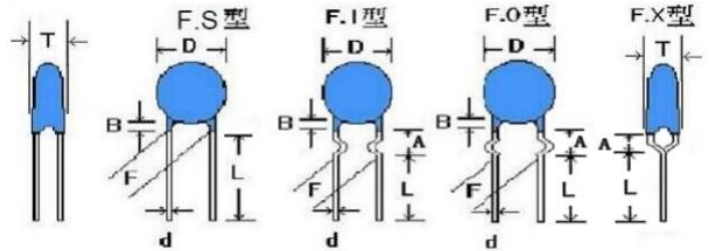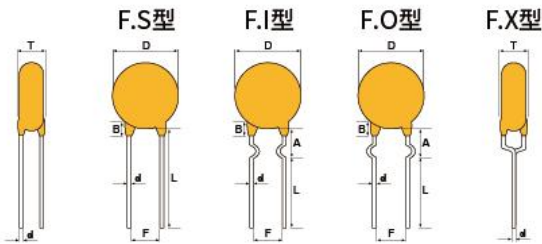

Dimensions and Tolerance

B=3.0mm max for AA

L=3-30mm

承認規格詳細參數 (Approved Spec. Data)

品名規格 Approve Item	外径 D max	腳距 F±0.8	厚度 T±0.5mm	腳長 LMINmm	線徑 d±0.05mm	絕緣腳 B	顏色 color	DF/Q 值	Amm	備註 Note
Y5P 101K/6KV	6.0	10.0	4.5	25.0	0.55	≦2.5	藍色	≦2.5%	/	
Y5P 102K/6KV	11.5	10.0	4.5	25.0	0.55	≦2.5	藍色	≦2.5%	/	
Y5P 221K/6KV	6.8	10.0	4.5	25.0	0.55	≦2.5	藍色	≦2.5%	/	
Y5U 471K/6KV	6.8	10.0	4.5	25.0	0.55	≦2.5	藍色	≦2.5%	/	
Y5V 222M/6KV	8.4	10.0	4.5	25.0	0.55	≦2.5	藍色	≦5.0%	/	
Y5V 472M/6KV	11.4	10.0	4.5	25.0	0.55	≦2.5	藍色	≦5.0%	/	

規格目錄中所列的產品，材料和尺寸其他內容如有更改，恕不另行通知。

The products, materials and dimensions listed in the specification catalog are subject to change without prior notice.

1. 適用範圍 (Scope of Application)

適用於電子機器、儀表、通信器材及資訊產品之絕緣圓板形固定陶瓷電容器。

Ideal for use on Electrical Appliance、Instrument、Communication equipment and Information product.

1. 種類 (Type)

- 2-1· CLASS 1 溫度補償型(Temperature compensation type)· · · · · (TC TYPE)
- 2-2· CLASS 2 高介電常數(High inductivity)· · · · · (HI - K TYPE)
- 2-3· CLASS 3 半導體(Semi-Conductive)· · · · · (SC TYPE)

3· 溫度范围 (Temperature Range)

- 3-1· Y 级 (Y Type) (- 25°C — + 85°C) 溫度特性范围(Operating Temperature Range)
- 3-2· Z 级 (Z Type) (+ 10°C — + 85°C) 溫度特性范围(Operating Temperature Range)
- 3-3· X 级 (X Type) (- 55°C — + 125°C) 溫度特性范围(Operating Temperature Range)
- 3-4· .Y 级, Z 级 (-40°C — +125°C) 工作溫度范围(Use temperature range)

4· 額定電壓 (Rated Voltage)

- 4-1· TC & Hi - k · · · 50V· 500V· 1KV· 2KV· 3KV· 6KV · 8KV · 10KV· 15KV(D· C)
- 4-2· SC · · · · · 16V· 25V· 50V · 100V
- 4-3· T.C. 標示法

高压电容: HIGH DIELECTRIC CONSTANT CAPACITOR


B:Y5P/X7R D:Y5T/Y5R E:Y5U F:Y5V

5· 溫度特性 (Temperature Characteristics)

- 5-1· CLASS 1 (溫度係數 Temperature Coefficient: PPM/°C)

代 號 Code	PPM / °C	溫度係數容許差 Temperature Coefficient Change		顏 色 Color	EIA 規格 Specification	代 號 Code	W· V
		代 號 Code	PPM/ °C				
C	0	H	± 60	黑 black	NPO	C0	50V 15KV
H	-30	H	± 60	棕 brown	N33	S1	
L	-80	H	± 60	红 red	N80	U1	
P	-150	H	± 60	橙 orange	N150	P2	
R	-220	H	± 60	黄 yellow	N220	R2	
S	-330	H	± 60	绿 green	N330	S2	
T	-470	H	± 60	蓝 blue	N470	T2	
U	-750	J	± 120	紫 purple	N750	U2	
D	'-3300	L	± 500	N 330 ± 500		S 2 L	
SL	+ 140 > @ > - 1000						

T· C· CHART

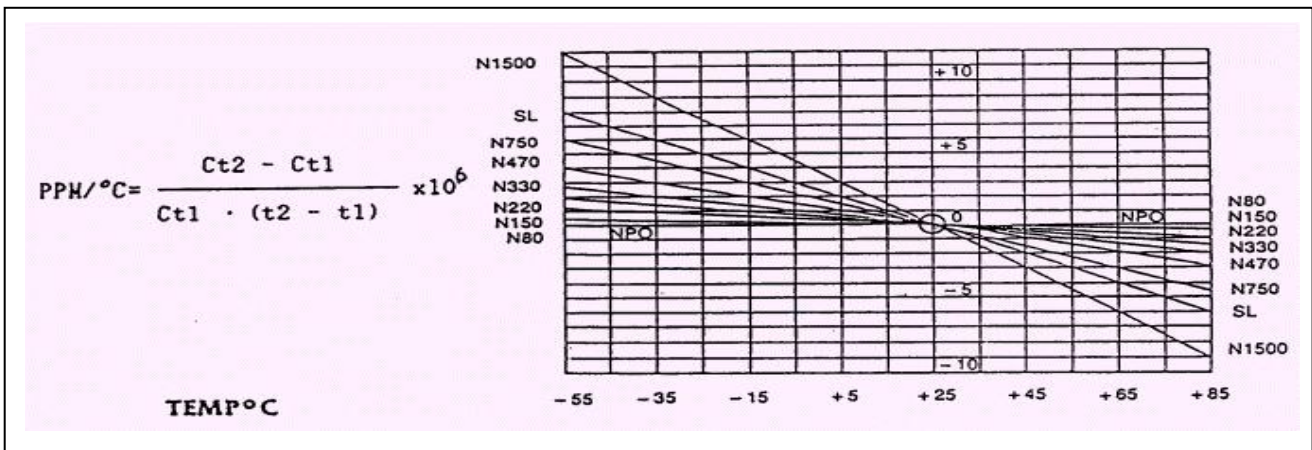


5 - 2 CLASS 2 (溫度變化率 Temperature Coefficient : %)

代 號 Code	溫度範圍 Temperature Range	容量變化率 Capacitance Tolerance	EIA 規格(Specification)		W· V
			代 號 Code	容量變化率 Capacitance Tolerance	
B	-25°C +85°C	+ 10 % / - 10 %	Y5P/YL	+ 10 % / - 10 %	50V-15KV
D		+ 20 % / - 30 %	Y5T/Y5R	+ 22 % / - 33 %	50V-15KV
E	-25°C +85°C	+ 20 % / - 55 %	Y5U/Z5U	+ 22 % / - 56 %	50V-20KV
F		+ 30 % / - 80 %	Y5V/Z5V	+ 22 % / - 82 %	50V-20KV
R	-55°C + 125°C	+ 15 % / - 15 %	X7R	+ 15 % / - 15 %	50V-2KV

5 - 3 CLASS3 (溫度變化率 Temperature Coefficient : %)

代 號 Code	溫度範圍 Temperature Range	容量變化率 Capacitance Tolerance	EIA 規格(Specification)		W.V
			代 號 Code	容量变化率 Capacitance Tolerance	
D	-25°C +85°C	± 15 %	Y5R	±15 %	16V.25V 50V,100V
		+ 20 % - 30 %	Y5T	+22 % -33 %	
+30 % -80 %		Y5V/Z5V	+22 % -82%		
+20 % -55 %		Y5U/Z5U	+22 % -56 %		
± 10 %		Y5P	±10 %		
F					

Capacitance Temperature Characteristics

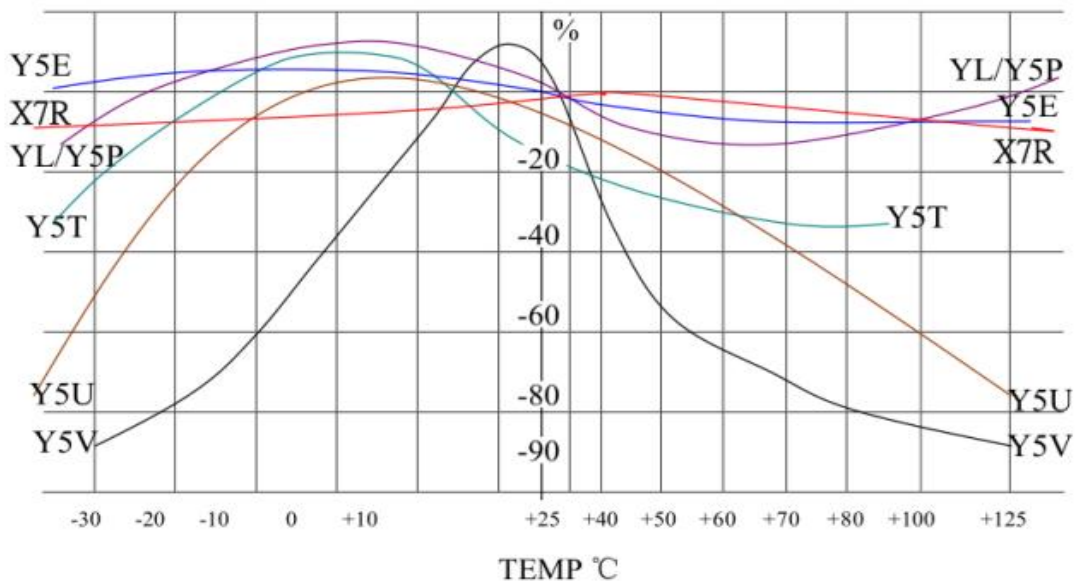

6. 制品尺寸與容量範圍 (Dimensions and Capacitance Range)

本规格书尺寸,脚距,仅供参考.尺寸如有变化,不另行通知. 请向我司查询或按贵司要求生产。

Size of this specification, foot distance, for reference only. Size change without notice. Please check with us or produce according to your requirement.

6 - 1 CLASS 1

Dimension(mm)			Capacitance Range(PF)						
直徑 Diameter (D)MAX	導線間隔 Lead Space (F)		50V	50V	50V	500V	500V-3KV	4KV-6KV	8KV-15KV
	直長腳 Straight Lead	彎短腳 Formed Lead	NPO- N750	N750	SL	NPO			
5.0	2.5±0.8	5.0±0.8	1-50	1-50	22 -150				
6.0	5.0±0.8	5.0±0.8	51-82	51-82	151-220	1-30	1-82	47-68	18-47
7.0	5.0±0.8	5.0±0.8	82-120	83-120	240-330			82-100	56-82
8.0	5.0±0.8	5.0±0.8	121-180	130-180	360-470	33-47	91-160	151-221	100
9.0	5.0±0.8	5±0.8	181-220	181-220	500-560			271	151
10.0	5.0±0.8	5.0±0.8	221-270	221-270	561-820	51-120	180-300	331	181-221
12.0	5.0±0.8 7.5±0.8	5.0±0.8 9.2.5±0.8	271-330	271-330	561-820	51-120	180-300	331	181-221
14.0	5.0±0.8 7.5±0.8		331-470	471	170-240	470-240	470-560	561-681	391

6 - 2 CLASS 2

EIA 温度特性图 TEMPERATURE CHARACTERISTIC CHART		
X : - 55°C	4 : + 65°C	A ± 1.0%
Y : - 25°C	5 : + 85°C	B ± 1.5%
Z : - 10°C	6 : + 105°C	C ± 2.2%
	7 : + 125°C	D ± 3.3%
	8 : + 150°C	E ± 4.7%
		F ± 7.5%
		P ± 10%
		R ± 15%
		S ± 22%
		T + 22% - 33%
		U + 22% - 56%
		V + 22% - 82%
第一个 最低温度 First Digit is low Temperature	第二个 最高温度 Second Digit is High Temperature	最后一个字母 电容量变化, 温度范围 25°C. Last Digit is Capacitance Change Over Temperature Range From + 25 C Reading

JYH HSU(JEC) ELECTRONICS LTD.,

尺寸 Dimension (MM)	直徑 Diameter (D) MAX		5.0	6.0	7.0	8.0	9.0	10.0	12.0	14.0	16.0	18.0	23.0
	Lead Space 导线间隔 (H)	彎短腳 Formed Lead	5.0±0.8	5.0±0.8	5.0±0.8	5.0±0.8	7.5±0.8	7.5±0.8 10.0±0.8					
		直短腳 Straight short Lead	5.0±0.8	5.0±0.8	5.0±0.8	5.0±0.8	5.0±0.8	5.0±0.8	7.5±0.8	7.5±0.8 10.0±0.8		10.0±0.8 12.5±0.8	
		直長腳 Straight long Lead	2.5±0.8	5.0±0.8	5.0±0.8	5.0±0.8	5.0±0.8	5.0±0.8	7.5±0.8	7.5±0.8 10.0±0.8		10.0±0.8 12.5±0.8	
容 量 范 围 Capacitance Range (PF)	50 V	B(Y5P/ Y5T/YL)	101-222	272-330	392-472	562-822	203-223						
		E(Y5U)	102-103	682-103	123	153-223							
		F(Y5V)	102-103	153-203	223	473							
	500V- 1KV	B(Y5P/ Y5T/YL)	101-501	561-102	122-152	222-472	182	562-103	822-103				
		E(Y5U)	101-102	152-222	272	332-392	472-562	682-103					
		F(Y5V)	102-122	152-182	202-222	272-332	392-103	153-183	203-333	473	104		
		R(X7R)		101-561	102-122		222						
	2KV	B(Y5P/ Y5T/YL)		101-561	681-102	122-152	182-272	332-103					
		E(Y5U)		102-122	152-182	202-272	332	392-472					
		F(Y5V)	101-102	102-182	202-222	272-332	392-682	103	223-473				
	3KV- 4KV	B(Y5P/ Y5T/YL)		101-471	561-681	821	102-222	332-682					
		E(Y5U)		102-122	152-182	202-222	102-222	332-682	103				
		F(Y5V)		102-182	202-222	272	332-472	332-682	103				
	5KV- 6KV	B(Y5P/ Y5T/YL)	101		10-82	101-471	561-102	122-682					
		E(Y5U)			471-102	152-182	222	272	332-472	682	103		
		F(Y5V)			102-222	152-222	332-392	472	682	103			
	8KV- 12KV	B(Y5P/ Y5T/YL)			101-331	471	561-681	821-102	122	182			
		E(Y5U)			471-561	681-102	122	152-182	222	222	472		
		F(Y5V)			102	152-182	222-	272-332	472				
	15KV- 20KV	B(Y5P/ Y5T/YL)			101-331	471	561-681	821-102	102-222	222			
		E(Y5U)			471-561	681-102	122	152-182	222	222	472		
		F(Y5V)			102	152	182	102-222	272	332	472	103	

6-2 CLASS 3

尺寸 Dimension (MM)		直徑 Diameter (D) MAX	5.0	6.0	7.0	8.0	10.0	11.0	12.0	14.0	
		导线 间隔 (F) Lead Space	彎短腳 Formed Lead	5.0 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	7.5 ± 0.8	7.5 ± 0.8	10.0 ± 0.8
		直短腳 Straight short Lead	2.5 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	7.5 ± 0.8	7.5 ± 0.8	10.0 ± 0.8	10.0 ± 0.8
		直长腳 Straight long Lead	2.5 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	5.0 ± 0.8	7.5 ± 0.8	7.5 ± 0.8	10.0 ± 0.8	10.0 ± 0.8
容量 范围 Capacitance Range (PF)	16 V	D Y5R	103		223	473			104		
		D Y5T	223	473-104							
		F Y5V	473	104							
		E Y5U	223-473	104							
	25 V	D Y5R	103			223	473			103	
		D Y5T	103	223		473		104	103	223	
		F Y5V	223	473-104	154	224			223	473-104	
		E Y5U	153-223	473	104				153-223	473	
	50V 100V	F Y5V	223	473	104		224				
		E Y5U								104	
		B Y5P	103								

7. 靜電容量與容許差 (Capacitance & Tolerance) :

7-1 CLASS 1

靜電電容 Capacitance	容許差 Tolerance			
	代號 Code	容量 Capacitance	代號 Code	容量 Capacitance
1-5PF	C	±0.25PF	D	±0.5PF
6- 821 PF	J	±5 %	K	±10 %

7-2 CLASS 2

50V	容許差 Tolerance		500V 20KV	容許差 Tolerance	
	代號 Code	%		代號	%
B	K	±10 %	B	K	±10 %
D	M	±20 %	R	L	±15 %
F	Z	+80 % -20 %	F	Z	+80 % -20 %
E	M	±20 %	E	M	±20 %
	Z	+80 % -20 %		Z	+80 % -20 %
	P	+100 % - 0 %		P	+100 % - 0 %

7-3 CLASS 3

16V 50V	容許差 Tolerance		16V 50V	容許差 Tolerance	
	代號 Code	%		代號 Code	%
D (Y5R)	K	± 10 %	B (Y5P)	K	± 10 %
D (Y5T)	M	± 20 %	E (Y5U)	M	± 20 %
F (Y5V)	Z	+ 80 % - 20 %	R (X7R)	K	± 10 %

8.性能與試驗 (Performance and Testing)

本規格承認書所列之名稱製品規格之性能及一般試驗，特殊試驗均符合及依據 EIA RS 198, JIS C 6422, 423, GB/T 2693 等規格。

The specification recognizes the performance and general test of the product specification listed in this specification, Special tests are in accordance with and basis EIA RS 198, JIS C 6422, 6423, GB/T 2693 Specifications such as

注意：1. 依國際規範定義，耐壓測試時，零件承認或周期性試驗測試為一分鐘，經一分鐘測試之部品需報廢處理。（此測試條件帶有破壞性測試）

"Note: (1) Is was defined according with IEC, when for qualification approval and periodic tests, the withstanding test must last to 1 minute, and it belong to destroyed test domain, therefore, after the test, capacitors should be scrap. Withstand voltage test should rise slowly at 150V/s, and test time is counted from when the voltage reaches to experiment requirement." (Capacitors may cause to damage when withstand voltage test repeated.)

2. 批量生產時測試時間為三秒鐘，耐壓測試應為緩升或零啟動。

(2) The test time is more than 1 second at production period, and the rated test voltage is applied.

编号 No	项目 Item	性能 Performance		试验方法 Test Method			
6	Q/tan σ (%)	CLASS 1 : Q/tan σ (%)		6-1	與第 5 項同。 Same as item 5.		
		< 30PF Q ≧ 400+20 × C					
		> 30PF Q ≧ 1,000					
		CLASS 2 : tan σ (%)					
		D、B、E 特性 features: 2.5% Max F 特性 features: 5.0% Max					
		CLASS 3 : tan (%)					
		16V	7.0% Max				
		50V 25V	5.0% Max				
7	靜電容量 溫度特性 Temperature Characteristics	CLASS 1	容量漂移 Capacitance Change	必須符合 5-1 之規格。 Should be meet the specified range at 5-1.	7-1	溫度係數 Temperature Coefficient: (CLASS 1) $PPM / ^\circ C = \frac{C_{t2} - C_{t1}}{C_{t1} \cdot (t2 - t1)}$ C t2 : 在 t2 時之容量值 (C t2 : at t2 value) C t1 : 在 t1 時之容量值 (C t1 : at t1 value) t2 : 85 °C ± 3 °C t1 : 20 °C ± 2 °C 溫度階段 Temperature step <1> 20 ± 2 °C → <2> -25 ± 2 °C → <3> 20 ± 2 °C → <4> 85 ± 2 °C → <5> 20 ± 2 °C	
			容量漂移 Capacitance Change	在 ±0.2% 或 ±0.05 PF 以內, 取较大者为准。 Within ±0.2% or ± 0.05PF,take the larger.	7-2		
		CLASS 2、3	無電壓時 Non bias	必須符合 5-2、5-3 之 規格。 Should be meet the specified range at 5-2 5-3.	7-3		容量變化率 Capacitance change rate:(CLASS 2、3) $C \cdot C (\%) = \frac{(C_{tx} - C_{t20})}{C_{t20}} * 10$ C tx : 溫度階段 <1> <3> <5> 除外, <2> 到 <4> 之間任何溫度時之容量值。 C tx : Capacitance at temperature step(2) & (4), but (1), (3), (5)exclusion. C t20 : 溫度階段 <3> 時之容量值。 C t20 : Capacitance at temperature step (3).
			加壓於兩 端子間時 Bias between two terminals	B : +10% -20% D : +20% -40% E : +20% -80% F : +30% -95%			
8	端子強度 Robustness of Terminations	抗拉強度 Tensile	導線不斷裂, 電容器不破損。 Lead wire should not be cut off. Capacitor should not be broken.	8-1	線徑 Lead Dia. <mm>	負荷重 Loading kgs	時間 <秒> Time <sec>
					∅ 0.5	0.5	10
					∅ ∅ 0.6~0.8	1.0	10
		彎曲強度 Bending	導線不致被折斷, 電容器不損。 Lead wire should not be cut off. Capacitor should not be broken.	8-3	線徑 Lead Dia. <mm>	負荷重 Loading kgs	彎曲角度為 90。兩回以上 Each lead wire should be a 90 ° bend in the opposite Direction of more two bends.
					∅ 0.5	0.25	
					∅ ∅ 0.6~0.8	0.5	

编号 No	项目 Item	性能 Performance		试验方法 Test Method	
9	耐振性 Vibration Resistance	外觀 Appearance	無顯著之異常 No marked defect	9-1	振動頻率 10 → 55 → 10 HZ 一分鐘內完全成覆振動全振幅 1.5 mm。 Vibrated at a frequency range of 10 → 55 → 10 HZ with about a 1 minute 1.5mm in total amplitude.
		容量變化 Capacitance	在規格範圍內 Within the specified tolerance		
		Q 或 tan σ Q or tan σ	在初期規格內 Within the specified tolerance		
10	焊錫耐熱性 Soldering heat-resistance	外觀 Appearance	無顯著之異常 No marked defect	10-1 10-2 10-3 10-4	焊錫溫度 350 ± 10 °C Soldering Temperature 350 ± 10 °C 浸漬時間 3.5 ± 0.5 秒 Dipped time 3.5 ± 0.5 sec 在常溫常濕中放置 4 ~ 24 小時后測之。 Placed at room condition for 4~24 hrs, and test. 本體尺寸 5 m/m 以下者 270 ± 5 °C。 Body dimension under 5 m/m at 270 ± 5 °C. 浸漬時間 3 ± 0.5 秒 Dipped time 3 ± 0.5 sec
		容量變化 Capacitance Change	CLASS 1 在 ± 2.5 % 或 ± 0.25PF 以內取較大值。 Within ± 2.5 % or ± 0.25PF, takes bigger value.		
			CLASS 2 3 B : ≤ ± 5 % D : ≤ ± 10 % E : ≤ ± 15 % F : ≤ ± 20 %		
		耐电压 Dielectric Strength	无任何异常发生 No failure.		
11	焊錫附着性 Solder ability of Leads	導線之橫截面積上須有圓周之 3 / 4 以上之面積為焊錫所付著。 Lead wire should be soldered with uniform coating on the axial direction over 3/4 of the circumferential direction.		11-1 11-2	焊錫溫度為 275 ± 10 °C。 Soldering Temperature 275 ± 5°C。 浸漬時間為 2 ± 0.5 秒。 Dipped time 2 ± 0.5 seconds.
12	耐溶劑性 (本體) Solvent Resistance (Body)	試驗後其電性能須符合標準。 After the test must meet the standards of its electrical properties.			將樣本完全浸漬於丙醇溶劑中 5 ± 0.5 分後取出，觀察本體有無溶解，而後放置於常溫中 48 小時，量測其電氣特性。 The capacitor should be immersed into a isopropyl alcohol for 5 ± 0.5 minutes, then removed and placed for 48 hrs. at room condition before post measurements.

编号 No	项目 Item	性能 Performance			试验方法 Test Method	
13	耐濕性 Humidity (Under Steady State)	外觀 Appearance		無顯著之異常。 No marked defect.	溫度：40 ± 2 °C Temperature：40 ± 2 °C 濕度：90 ~ 95 % RH Humidity: 90 ~ 95 %RH 時間：500 ± 12 小時 Time：500 ± 12 Hrs. 取出置常溫下 1 ~ 2 小時后 測定之 After humidity test, placed at room condition 1~ 2 hrs, then measure it.	
		容量變化 Capacitance Change	CLASS 1	在 ±2.5% 或 ±0.5PF 以內取 較大值。 Within ±2.5% or ± 0.5PF, takes bigger value.		13-1 13-2 13-3 13-4
			CLASS 2-3	B : ≤ ± 5 % D : ≤ ± 10% E : ≤ ± 15% F : ≤ ± 20%		
		Q	CLASS 1	參考附圖 1 Refer to attached figure 1.		
		Tan σ (%)	CLASS 2-3	B、D、E 特性在 5% 以下, F 特性 7.5% 以下 B、D、E, < 5%. F, < 7.5 %		
			CLASS 1	≥ 1000M Ω		
			CLASS 2	≥ 1000M Ω or 20 Ω F, 取小者。 Take the small one.		
			CLASS 3	16V		≥ 50M Ω or 5 Ω F, 取小者。 Take the small one.
				25V 50V		≥ 500 M Ω or 20 Ω F, 取小者。 Take the small one.
			耐電壓 Dielectric Strength	無任何異常 No failure		

编号 No	项目 Item	性能 Performance				试验方法 Test Method			
14	耐濕負荷 Humidity Loading	外觀 Appearance		無顯著之異常 No marked defect.		14-1	溫度: 40 ± 2 °C Temperature : 40 ± 2 °C		
		容量變化 Capacitance Change	CLASS 1	在±7.5%或±0.75 PF 以內取較大值。 Within ± 7.5 % or ± 0.75 PF, take the lager one.		14-2			
			CLASS 2-3	B : ≤ ± 5 % D : ≤ ± 10% E : ≤ ± 15% F : ≤ ± 20%		14-3	濕度: 90 ~ 95 % RH Humidity: 90 ~ 95 % RH		
					14-4				
					14-5	時間: 500 ± 12 小時 Time : 500 ± 12 Hrs			
					14-6	電壓: 依額定電壓印加之。 Voltage: Apply the rated voltage			
		Q	CLASS 2	參考附圖 1 Refer to attached figure 1.		CLASS 1,2	≥ 500 M Ω		
		Tan σ (%)	CLASS 2	B、D、E、< 5 % F < 7.5 %		絕緣電阻 Insulation Resistance	CLASS 3	16V	≥ 50 M Ω or 5 Ω F, 之較小值上 Take the small one.
			CLASS 3	16V	<10%				25V 50V
			25V 50V	<7.5%	耐電壓 Dielectric Strength		無任何異常 No failure		

编号 No	项目 Item	性能 Performance			试验方法 Test Method	
15	高温负荷 High temperature loading	外觀 Appearance	無顯著之異常 No marked defect	15-1 15-2 15-3 15-4 15-5	溫度： 85 ± 3°C Temperature : 85 ± 3°C 時間：1000 ± 12 小時 Time : 1000 ± 12 hrs 電壓：依額定電壓印加之。 Voltage: Apply the rated voltage 電流：50 MA 以下。 Current: < 50 MA 取出置常溫下 1~2 小時后測定之 After humidity test, placed at room condition 1~ 2 hrs, then measure it.	
		容量變化 Capacitance Change	CLASS 1	在±3%或±0.3 PF 以內取較大值。 Within ± 3 % or ± 0.3 PF, take the larger one.		
			CLASS 2-3	B : ≤ ± 5 % D : ≤ ± 10 % E : ≤ ± 15 % F : ≤ ± 20 %		
		Q	CLASS 1	參考附圖 1 Refer to attached figure 1.		
		Tan σ (%)	CLASS 2	B、D、E 特性在 4% 以下 Char. B、D、E, < 4 % F 特性 7.5% 以下 Char. F < 7.5 %		
			CLASS 3	16V		< 10 %
				25V 50V		< 7.5 %
		絕緣電阻 Insulation Resistance	CLASS 1	1000M Ω 以上 ≥ 1000M Ω		
CLASS 2	≥ 1000M Ω or 20 Ω F, 取小者。 Take the small one.					
CLASS 3	16V		≥ 50 M Ω or 5 Ω F, 取小者。 Take the small one.			
	25V 50V	≥ 500M Ω or 20 Ω F, 取小者。 Take the small one.				
耐電壓 Dielectric Strength	無任何異常 No marked defect.					


附圖一 Attached figure 1	適用項目 Applied Item	規格值 Specification	
	初期值 <5> 耐振性 <9> Initial Value <5> Vibration Resistance <9>	≥ 30PF < 30PF	Q ≥ 1000 Q ≥ 400+20 C
	溫度以及浸漬循環 <12> 耐濕性 <13> , 高溫負荷 <15> Temperature and immersion cycle <12> , Humidity <13> , High temperature loading <15>	≥ 30PF 10PF~30PF < 10PF	Q ≥ 350 Q ≥ 275+5 / 20 C Q ≥ 200+10 C
	耐濕負荷 <14> Humidity Loading <14>	≥ 30PF < 30PF	Q ≥ 200 Q ≥ 100+10 / 3 C

成品之編碼原則上以十五碼完成，亦以阿拉伯數字與英文字母混合編成，第二碼至第十一碼與瓷片相同。第一碼以J 代表自製（取 JEC 商標第一字）

The coding of the finished product is in principle 15 codes, which are mixed with Arabic numerals and English letters Sizes 2 to 11 are the same as the tiles.The first code is represented by J (take the first word of JEC trademark).

例：J2472M3AY5VS5LE

(Y5V 472M/1KV 5*25)



同瓷片编码
Porcelain plate coding

脚型 Foot type
直脚 S 表示
Straight foot S
弯脚 O 表示外弯
Bending-o stands for outward bend
弯脚 I 表示内弯
Bending I means bending in


脚距 Foot distance
2.5 代表脚距 2.5 mm
2.5 represents foot distance of 2.5mm
5 代表脚距 5.0 mm
5 represents foot distance of 5.0mm
6.5 代表脚距 6.5 mm
6.5 represents foot distance of 6.5mm
7.5 代表脚距 7.5 mm
7.5 represents foot distance of 7.5mm
9.5 代表脚距 9.5 mm
9.5 represents foot distance of 9.5mm
T 代表编带(Taping)
T for Taping

涂装材料代码 Paint material code
C 代表陶瓷粉
C stands for ceramic powder
E 代表 EPOXY
E for EPOXY
注：以陶瓷粉涂装可不填
Note: ceramic powder coating can not be filled

脚长 5 代表脚长 5 mm
The length of the foot, 5 represents the length of the foot 5 mm
8 代表脚长 8 mm
8 represents the length of the foot 8 mm
0 代表脚长 10mm
0 represents the length of the foot 0 mm
L 代表长脚
L stands for long leg


陶瓷瓷片 2-11 編碼規定如下:

The coding of ceramic tiles 2-11 is specified as follows

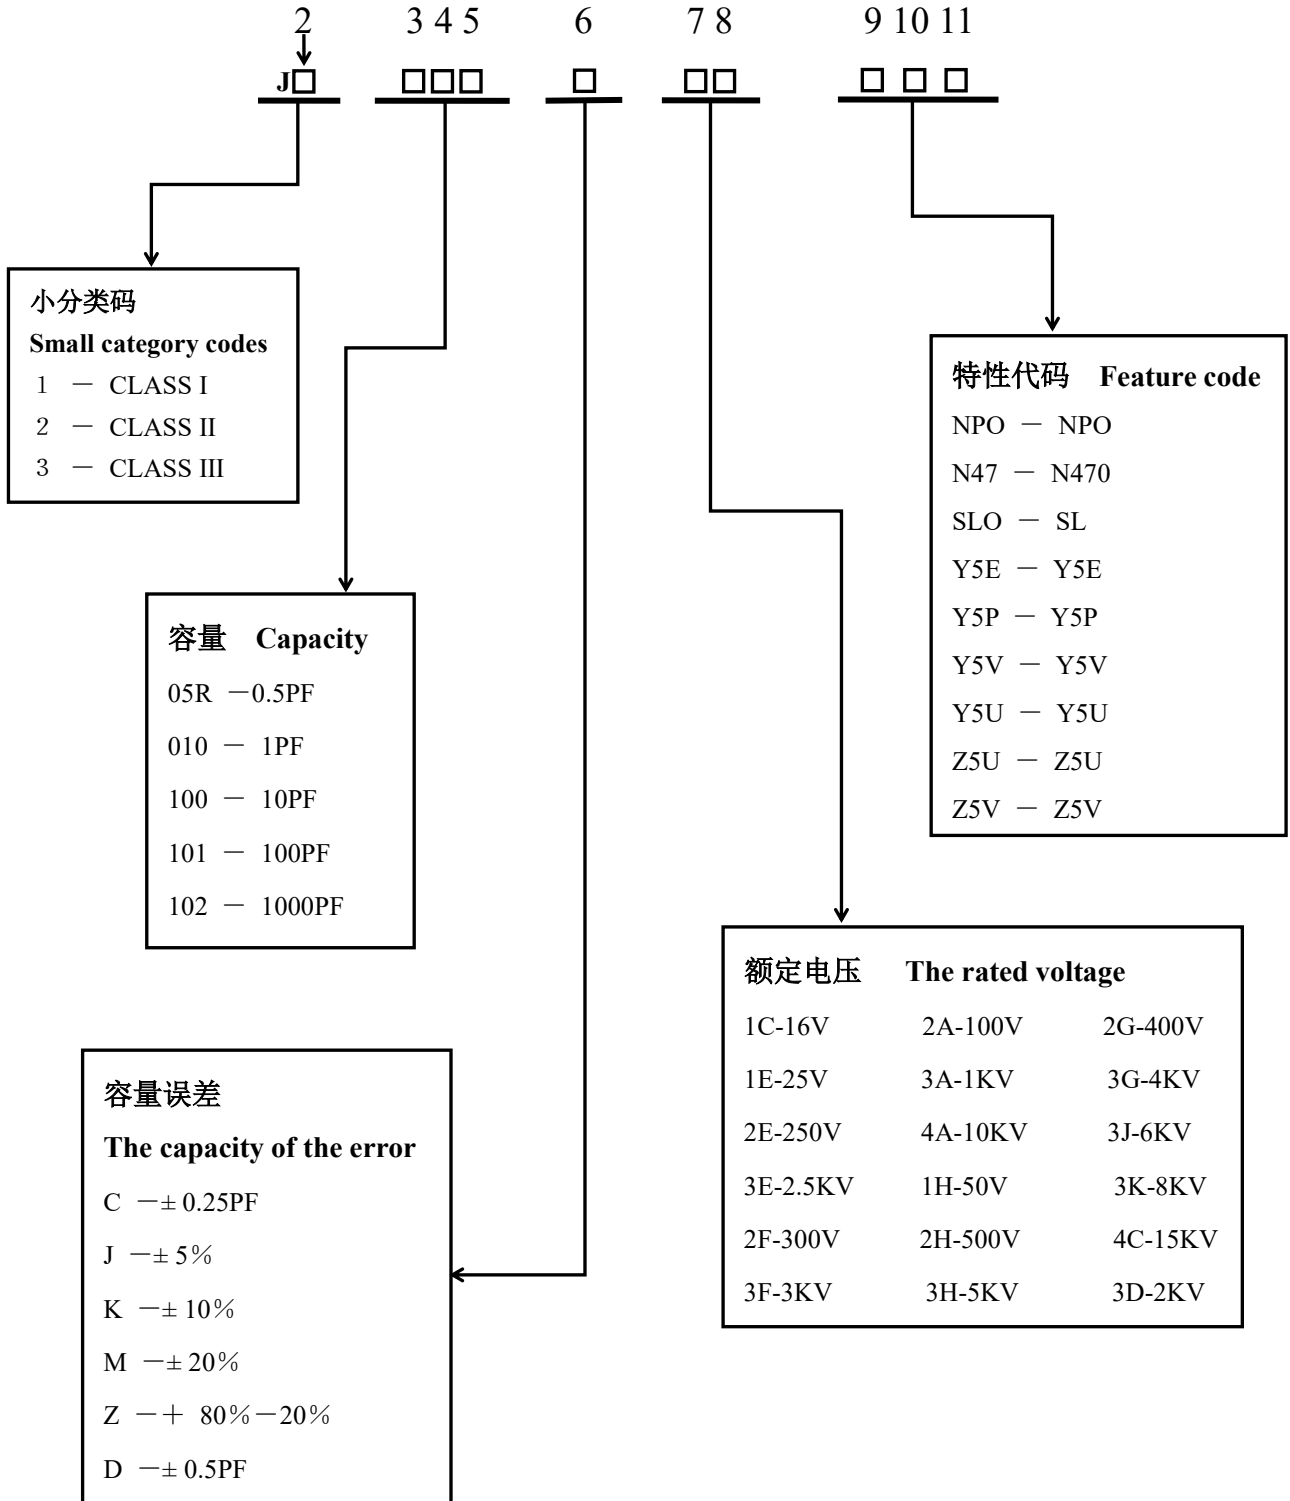

9. 瓷质电容器外形规格:

Porcelain capacitor shape specification:

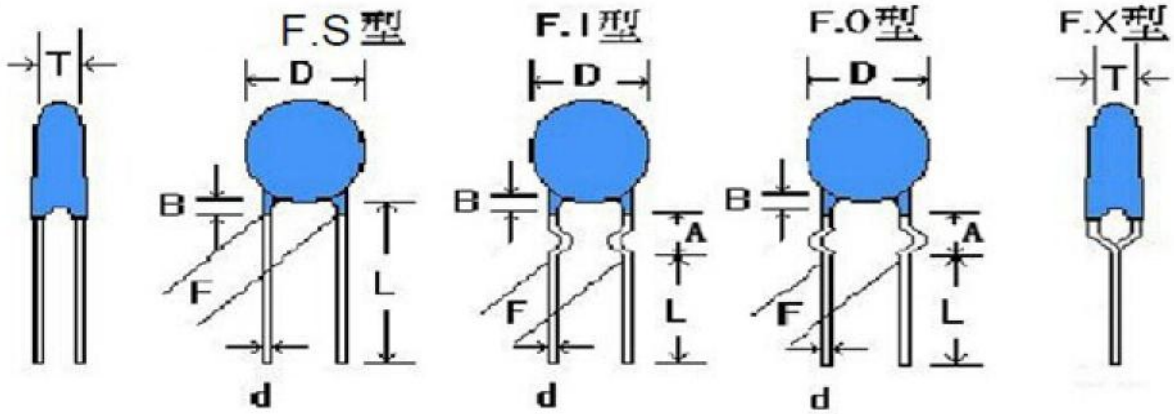

MODE	W.V	T m/m	d m/m	L m/m	F m/m	B m/m
F.S	12V - 100V	3m/m	0.45±0.05m/m	3 - 25m/m	2.50 m/m±0.8	2m/m
	500V - 2KV	3.5m/m	0.48±0.05m/m	3 - 25m/m	5.0 m/m±0.8	
	3KV - 8KV	6m/m	0.55±0.07m/m	3 - 25m/m	7.50 m/m±0.8	
	10KV - 15KV	8-10m/m	0.55-0.80±0.08m/m	3 - 25m/m	9.52-12.0m/m±0.8	
F.I	12V - 100V	3m/m	0.48±0.07m/m	3 - 25m/m	5.00 m/m±0.8	4m/m
	500V - 10KV	8m/m	0.55±0.08m/m	3 - 25m/m	9.50m/m±0.8	

- CLASS 1 TEMPERATURE COMPENSATING CAPACITOR
- CLASS 2 HIGH DIELECTRIC CONSTANT CAPACITOR
- CLASS 3 SEMICONDUCTIVE CAPACITOR
- CLASS 1.2. HIGH VOLTAGE CERAMIC CAPACITOR
- CLASS 1.2.3. APING SPECIFICATIONS


Packing Quantity

Pack	Safety Y1	Safety Y2	High Voltage	Ceramic DC
10 -332PF	1000PCS	1000pcs	1000pcs	1000PCS
472-103pF	500PCS	1000PCS	1000PCS	1000PCS
223-104pF	/	/	500PCS	1000PCS



TAPING SPECIFICATIONS



Taping (Radial)

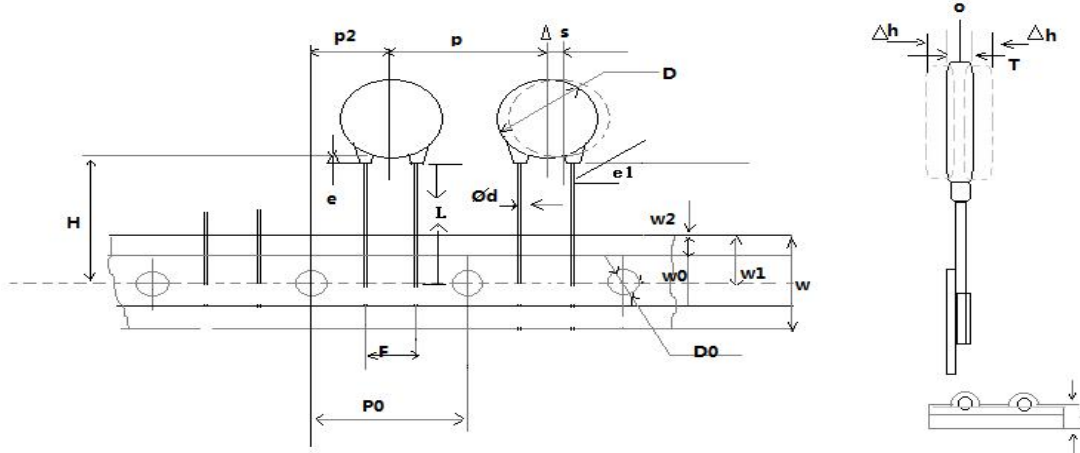

图片中没有注明 P0 数据的都是孔距 12.7mm

Item	Code	Dimensions (mm)	Item	Code	Dimensions (mm)
Taping Pitch	P	12.7±1.0	Lead Protrusion	l	+0.5~1.0
Guide Pitch	Po	12.7±1.0	Diameter of Feed Hole	Do	4.0±0.3
Lead Spacing	F	5.0±0.8 7.5±0.8	Diameter of Lead	d	0.50+0.06 - 0.05
Feed Hole Position Capacitor Body	P2	6.35	Total Thickness of Tape	t	0.5±0.2
Feed Hole Position Capacitor Lead			Thickness of Capacitor Body	T	Differ in each product
Diameter Of ISO	D	See table of each series	Alignment to FR. Direction	Δ h	0±2.0
			Length of snapped Lead	L	17.0+2.0 - 1.0
Width Of Base Tape	W	18.0±0.5	Width of Hold-down Tape	Wo	8±2.0
Feed Hole Vertical Position	W1	9.0 +0.75 - 0.05	Hold-down Tape Position	W2	1.5±1.5
Taping Height	For Straight	Ho	Coating Extention	e	3.0 以下
	For Crimp	H		e1	Up to center of crimp

REEL

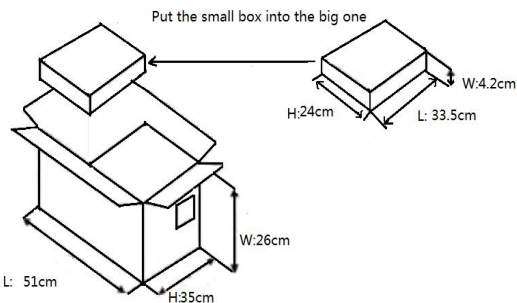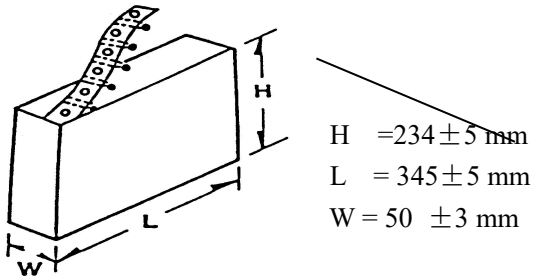

1. Tape box:

Part \ F	50V-2KV	3KV-6KV	6KV-
10-222PF	2000pcs	1500pcs	1200PCS
332-472PF	2000PCS	1500PCS	1500PCS
103PF	2000PCS	1000PCS	1000pcs

2. Each large box can hold ten small boxes.

■ **HIGH VOLTAGE** TEMPERATURE COMPENSATING CAPACITOR

Applications:

- Resonant circuit.
- High Q requirement.

- High stability Cap. Char.

Specifications:

Capacitance C	Range	1 PF ~ 680PF					measured at 1MHz±10%, 1.0 – 5.0 Vrms, 25°C				
	Tolerance	Code	C	D	J	K					
			±0.25 PF	±0.5 PF	±5%	±10%					
Quality Factor(Q)	C ≥ 30 PF	Q ≥ 1000									
	C < 30 PF	Q ≥ 400 + 20 × C									
Insulation Resistance (IR)		10000 MΩ min, measured at W.V.D.C, but not exceeding 500 VDC.									
Voltage	Working voltage (W.V.)		500V ~ 10KV DC								
	Test Condition			Test Voltage	Time	Current					
			W.V. = 500V	3.0 × W.V.	1 ~ 5 sec.	<50 mA					
			W.V.= 1KV/2KV	2.0 × W.V.	1 ~ 5 sec.	<50 mA					
			W.V.= 3KV/5KV	1.5 × W.V.	1 ~ 5 sec.	<50 mA					
			W.V. ≥ 6KV	1.2 × W.V.	1 ~ 5 sec.	<50 mA					
Operating Temp. Range	Type Code	Temperature Coefficient (PPM / °C)			Temp. Range						
	NPO	± 0			- 25°C to +85°C						
	SL	+350 ~ - 1000									
	The reference temperature: 25 °C										

■ **HIGH VOLTAGE** HIGH DIELECTRIC CONSTANT CAPACITOR

Applications:

- By-pass and coupling.
- Frequency discriminating circuits where Q and stability of Cap. Char. are not major importance.

■ **HIGH VOLTAGE** HIGH DIELECTRIC CONSTANT CAPACITOR

Applications:

- By-pass and coupling.
- Frequency discriminating circuits where Q and stability of Cap. Char. are not major importance.

Specifications:

Capacitance (C)	Range	100 PF ~ 47000PF					measured at 1KHz ± 10%, 1.0 — 5.0 Vrms, 25 °C		
	Tolerance	Code	K	M	Z	P			
			± 10%	± 20%	+80%, -20%	+100%, -0%			
Dissipation Factor (D.F)	2.5% Max.	at 1KHz, 1.0 Vrms, 25 °C for Y5E,Y5P,Z5U							
	5.0% Max.	at 1KHz, 1.0 Vrms, 25 °C for Z5V							
Insulation Resistance (IR)	10000 MΩ min, measured at W.V.D.C, but not exceeding 500 VDC.								
Voltage	Working voltage (W.V.)	500V ~ 10KV DC							
	Test Condition			Test Voltage	Time	Current			
		W.V. = 500V		3.0 × W.V.	1 ~ 5 sec.	<50 mA			
		W.V.= 1KV/2KV		2.0 × W.V.	1 ~ 5 sec.	<50 mA			
		W.V.= 3KV/5KV		1.5 × W.V.	1 ~ 5 sec.	<50 mA			
	W.V. ≥ 6KV		1.2 × W.V.	1 ~ 5 sec.	<50 mA				
Operating Temp. Range	Type Code	Max. Change in Cap.			Temp. Range				
	Y5E	± 4.7%							
	Y5P/X7R	± 10%			-25 °C to +85 °C				
	Y5U	+22%, -56%			-25 °C to +85 °C				
	Y5V	+22%, -82%			-25 °C to +85 °C				
The reference temperature: 25 °C									