

# C0G (NP0) Dielectric

## General Specifications

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)



C0G (NP0) is the most popular formulation of the "temperature-compensating," EIA Class I ceramic materials. Modern C0G (NP0) formulations contain neodymium, samarium and other rare earth oxides.

C0G (NP0) ceramics offer one of the most stable capacitor dielectrics available. Capacitance change with temperature is  $0 \pm 30\text{ppm}/^\circ\text{C}$  which is less than  $\pm 0.3\%$   $\Delta C$  from  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$ . Capacitance drift or hysteresis for C0G (NP0) ceramics is negligible at less than  $\pm 0.05\%$  versus up to  $\pm 2\%$  for films. Typical capacitance change with life is less than  $\pm 0.1\%$  for C0G (NP0), one-fifth that shown by most other dielectrics. C0G (NP0) formulations show no aging characteristics.

### PART NUMBER (see page 2 for complete part number explanation)

**0805**

**Size**  
(L" x W")

**5**

**Voltage**  
6.3V = 6  
10V = Z  
16V = Y  
25V = 3  
50V = 5  
100V = 1  
200V = 2  
500V = 7

**A**

**Dielectric**  
C0G (NP0) = A

**101**

**Capacitance Code (In pF)**  
2 Sig. Digits + Number of Zeros

**J**

**Capacitance Tolerance**  
B =  $\pm 10\text{ pF}$  ( $< 10\text{ pF}$ )  
C =  $\pm 25\text{ pF}$  ( $< 10\text{ pF}$ )  
D =  $\pm 50\text{ pF}$  ( $< 10\text{ pF}$ )  
F =  $\pm 1\%$  ( $\geq 10\text{ pF}$ )  
G =  $\pm 2\%$  ( $\geq 10\text{ pF}$ )  
J =  $\pm 5\%$   
K =  $\pm 10\%$

**A**

**Failure Rate**  
A = Not Applicable

**T**

**Terminations**  
T = Plated Ni and Sn  
7 = Gold Plated

**2**

**Packaging**  
2 = 7" Reel  
4 = 13" Reel  
7 = Bulk Cass.  
9 = Bulk

**A**


**Special Code**  
A = Std. Product

**Contact Factory For**  
1 = Pd/Ag Term


**Contact Factory For**  
Multiples

NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers.  
Contact factory for non-specified capacitance values.


**Temperature Coefficient**

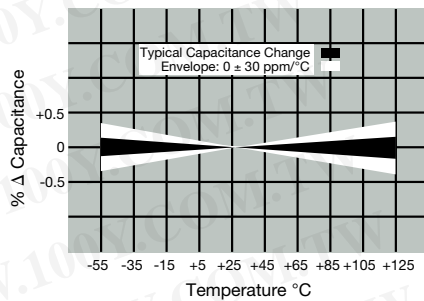


**Δ Capacitance vs. Frequency**

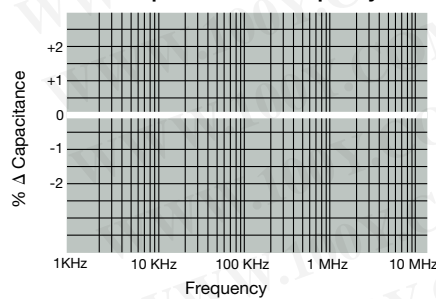


**Insulation Resistance vs Temperature**

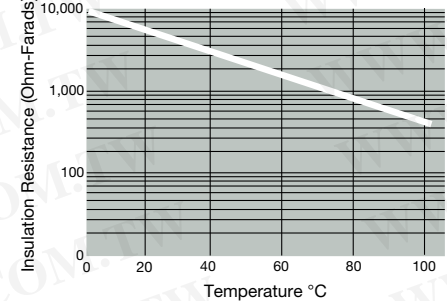


**Variation of Impedance with Cap Value**  
Impedance vs. Frequency  
0805 - C0G (NP0)  
10 pF vs. 100 pF vs. 1000 pF



**Variation of Impedance with Chip Size**  
Impedance vs. Frequency  
1000 pF - C0G (NP0)

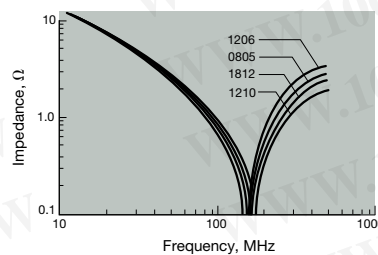

**Variation of Impedance with Ceramic Formulation**  
Impedance vs. Frequency  
1000 pF - C0G (NP0) vs X7R  
0805

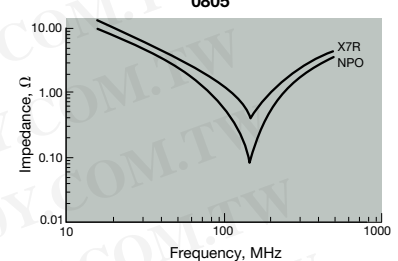


# COG (NP0) Dielectric

## Specifications and Test Methods

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

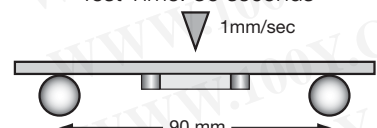

Parameter/Test		NP0 Specification Limits	Measuring Conditions	
Operating Temperature Range		-55°C to +125°C	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 MHz $\pm$ 10% for cap $\leq$ 1000 pF 1.0 kHz $\pm$ 10% for cap $>$ 1000 pF Voltage: 1.0Vrms $\pm$ .2V	
Q		$<$ 30 pF: $Q \geq 400 + 20 \times \text{Cap Value}$ $\geq 30$ pF: $Q \geq 1000$	Charge device with rated voltage for 60 $\pm$ 5 secs @ room temp/humidity	
Insulation Resistance		100,000M $\Omega$ or 1000M $\Omega$ - $\mu$ F, whichever is less	Charge device with 300% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max) Note: Charge device with 150% of rated voltage for 500V devices.	
Dielectric Strength		No breakdown or visual defects	Deflection: 2mm Test Time: 30 seconds 	
Resistance to Flexure Stresses	Appearance	No defects		
	Capacitance Variation	$\pm 5\%$ or $\pm 5$ pF, whichever is greater		
	Q	Meets Initial Values (As Above)		
	Insulation Resistance	$\geq$ Initial Value $\times 0.3$		
Solderability		$\geq 95\%$ of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 $\pm$ 5°C for 5.0 $\pm$ 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, $<$ 25% leaching of either end terminal	Dip device in eutectic solder at 260°C for 60 seconds. Store at room temperature for 24 $\pm$ 2 hours before measuring electrical properties.	
	Capacitance Variation	$\leq \pm 2.5\%$ or $\pm .25$ pF, whichever is greater		
	Q	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
Thermal Shock	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 hours at room temperature	
	Appearance	No visual defects	Step 1: -55°C $\pm$ 2°	30 $\pm$ 3 minutes
	Capacitance Variation	$\leq \pm 2.5\%$ or $\pm .25$ pF, whichever is greater	Step 2: Room Temp	$\leq 3$ minutes
	Q	Meets Initial Values (As Above)	Step 3: +125°C $\pm$ 2°	30 $\pm$ 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	$\leq 3$ minutes
Load Life	Dielectric Strength	Meets Initial Values (As Above)	Charge device with twice rated voltage in test chamber set at 125°C $\pm$ 2°C for 1000 hours (+48, -0).	
	Appearance	No visual defects	Remove from test chamber and stabilize at room temperature for 24 hours before measuring.	
	Capacitance Variation	$\leq \pm 3.0\%$ or $\pm .3$ pF, whichever is greater		
	Q (C=Nominal Cap)	$\geq 30$ pF: $Q \geq 350$ $\geq 10$ pF, $< 30$ pF: $Q \geq 275 + 5C/2$ $< 10$ pF: $Q \geq 200 + 10C$		
Load Humidity	Insulation Resistance	$\geq$ Initial Value $\times 0.3$ (See Above)	Store in a test chamber set at 85°C $\pm$ 2°C/ 85% $\pm$ 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied.	
	Dielectric Strength	Meets Initial Values (As Above)	Remove from chamber and stabilize at room temperature for 24 $\pm$ 2 hours before measuring.	
	Appearance	No visual defects		
	Capacitance Variation	$\leq \pm 5.0\%$ or $\pm .5$ pF, whichever is greater		
Load Humidity	Q	$\geq 30$ pF: $Q \geq 350$ $\geq 10$ pF, $< 30$ pF: $Q \geq 275 + 5C/2$ $< 10$ pF: $Q \geq 200 + 10C$		
	Insulation Resistance	$\geq$ Initial Value $\times 0.3$ (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

# COG (NP0) Dielectric


## Capacitance Range

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



PREFERRED SIZES ARE SHADED

SIZE	01005		0201		0402		0603				0805					1206							
Soldering	Reflow Only		Reflow Only		Reflow/Wave		Reflow/Wave				Reflow/Wave					Reflow/Wave							
Packaging	All Paper		All Paper		All Paper		All Paper				Paper/Embossed					Paper/Embossed							
(L) Length	0.40 ± 0.02 (0.016 ± 0.0008)		0.60 ± 0.03 (0.024 ± 0.001)		1.00 ± 0.10 (0.040 ± 0.004)		1.60 ± 0.15 (0.063 ± 0.006)				2.01 ± 0.20 (0.079 ± 0.008)					3.20 ± 0.20 (0.126 ± 0.008)							
(W) Width	0.20 ± 0.02 (0.008 ± 0.0008)		0.30 ± 0.03 (0.011 ± 0.001)		0.50 ± 0.10 (0.020 ± 0.004)		0.81 ± 0.15 (0.032 ± 0.006)				1.25 ± 0.20 (0.049 ± 0.008)					1.60 ± 0.20 (0.063 ± 0.008)							
(t) Terminal	0.10 ± 0.04 (0.004 ± 0.016)		0.15 ± 0.05 (0.006 ± 0.002)		0.25 ± 0.15 (0.010 ± 0.006)		0.35 ± 0.15 (0.014 ± 0.006)				0.50 ± 0.25 (0.020 ± 0.010)					0.50 ± 0.25 (0.020 ± 0.010)							
WWDC	16		25	50	16	25	50	16	25	50	100	16	25	50	100	200	16	25	50	100	200	500	
Cap (pF) 0.5			A		C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
1.0	B		A		C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
1.2	B		A		C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
1.5	B		A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
1.8	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
2.2	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
2.7	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
3.3	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
3.9	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
4.7	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
5.6	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
6.8	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
8.2	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
10	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
12	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
15	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
18	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
22	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
27	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
33	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
39	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
47	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
56	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
68	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
82	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
100	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
120	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
150	B	A	A	A	C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
180					C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
220					C	C	C	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J
270					C	C	C	G	G	G	G	J	J	J	J	M	J	J	J	J	J	J	M
330					C	C	C	G	G	G	G	J	J	J	J	M	J	J	J	J	J	J	M
390					C	C	C	G	G	G	G	J	J	J	J	M	J	J	J	J	J	J	M
470					C	C	C	G	G	G	G	J	J	J	J	M	J	J	J	J	J	J	M
560								G	G	G	G	J	J	J	J	M	J	J	J	J	J	J	M
680								G	G	G	G	J	J	J	J		J	J	J	J	J	J	P
820								G	G	G	G	J	J	J	J		J	J	J	J	J	J	M
1000								G	G	G	G	J	J	J	J		J	J	J	J	J	J	
1200												J	J	J	J		J	J	J	J	J	J	Q
1500												J	J	J	J		J	J	J	J	M	J	Q
1800												J	J	J	J		J	J	M	M			
2200												J	J	N	N		J	J	M	P			
2700												J	J	N	N		J	J	M	P			
3300												J	J				J	J	M	P			
3900												J	J				J	J	M	P			
4700												J	J				J	J	M	P			
5600																	J	J	M				
6800																	M	M					
8200																	M	M					
Cap (µF) 0.010																	M	M					
0.012																	M	M					
0.015																	M	M					
0.018																							
0.022																							
0.027																							
0.033																							
0.039																							
0.047																							
0.068																							
0.082																							
0.1																							
WWDC	25		50	16	25	50	16	25	50	100	16	25	50	100	200	16	25	50	100	200	500		
SIZE	01005		0201		0402		0603				0805					1206							
Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z									
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)									
	PAPER							EMBOSSED															



# COG (NP0) Dielectric

## Capacitance Range

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



### PREFERRED SIZES ARE SHADED

SIZE	1210					1812					1825				2220				2225						
	Reflow Only					Reflow Only					Reflow Only				Reflow Only				Reflow Only						
Soldering	Paper/Embossed					All Embossed					All Embossed				All Embossed				All Embossed						
Packaging	Paper/Embossed					All Embossed					All Embossed				All Embossed				All Embossed						
(L) Length	3.20 ± 0.20 (0.126 ± 0.008)					4.50 ± 0.30 (0.177 ± 0.012)					4.50 ± 0.30 (0.177 ± 0.012)				5.70 ± 0.40 (0.225 ± 0.016)				5.72 ± 0.25 (0.225 ± 0.010)						
(W) Width	2.50 ± 0.20 (0.098 ± 0.008)					3.20 ± 0.20 (0.126 ± 0.008)					6.40 ± 0.40 (0.252 ± 0.016)				5.00 ± 0.40 (0.197 ± 0.016)				6.35 ± 0.25 (0.250 ± 0.010)						
(t) Terminal	0.50 ± 0.25 (0.020 ± 0.010)					0.61 ± 0.36 (0.024 ± 0.014)					0.61 ± 0.36 (0.024 ± 0.014)				0.64 ± 0.39 (0.025 ± 0.015)				0.64 ± 0.39 (0.025 ± 0.015)						
Cap (pF)	0.5					0.5					0.5					0.5					0.5				
Cap (µF)	1.0					1.0					1.0					1.0					1.0				
1.2						1.2					1.2					1.2					1.2				
1.5						1.5					1.5					1.5					1.5				
1.8						1.8					1.8					1.8					1.8				
2.2						2.2					2.2					2.2					2.2				
2.7						2.7					2.7					2.7					2.7				
3.3						3.3					3.3					3.3					3.3				
3.9						3.9					3.9					3.9					3.9				
4.7						4.7					4.7					4.7					4.7				
5.6						5.6					5.6					5.6					5.6				
6.8						6.8					6.8					6.8					6.8				
8.2						8.2					8.2					8.2					8.2				
10					J	10					10					10					10				
12					J	12					12					12					12				
15					J	15					15					15					15				
18					J	18					18					18					18				
22					J	22					22					22					22				
27					J	27					27					27					27				
33					J	33					33					33					33				
39					J	39					39					39					39				
47					J	47					47					47					47				
56					J	56					56					56					56				
68					J	68					68					68					68				
82					J	82					82					82					82				
100					J	100					100					100					100				
120					J	120					120					120					120				
150					J	150					150					150					150				
180					J	180					180					180					180				
220					J	220					220					220					220				
270					J	270					270					270					270				
330					J	330					330					330					330				
390					M	390					390					390					390				
470					M	470					470					470					470				
560	J	J	J	J	M	560					560					560					560				
680	J	J	J	J	M	680					680					680					680				
820	J	J	J	J	M	820					820					820					820				
1000	J	J	J	J	M	1000	K	K	K	M	1000	M	M	M	M	1000					1000	M	M	P	P
1200	J	J	J	M	M	1200	K	K	K	M	1200	M	M	M	M	1200					1200	M	M	P	P
1500	J	J	J	M	M	1500	K	K	K	M	1500	M	M	M	M	1500					1500	M	M	P	P
1800	J	J	J	M		1800	K	K	K	M	1800	M	M	M	M	1800					1800	M	M	P	P
2200	J	J	J	Q		2200	K	K	K	P	2200	M	M	M	M	2200					2200	M	M	P	P
2700	J	J	J	Q		2700	K	K	K	P	2700	M	M	M	M	2700					2700	M	M	P	P
3300	J	J	J			3300	K	K	K	P	3300	M	M	M	M	3300			X		3300	M	M	P	P
3900	J	J	M			3900	K	K	K	P	3900	M	M	M	M	3900			X		3900	M	M	P	P
4700	J	J	M			4700	K	K	K	P	4700	M	M	M	M	4700	X	X	X		4700	M	M	P	P
5600	J	J				5600	K	K	M	P	5600	M	M	M	M	5600	X	X	X		5600	M	M	P	P
6800	J	J				6800	K	K	M	X	6800	M	M	M	M	6800	X	X	X		6800	M	M	P	P
8200	J	J				8200	K	M	M		8200	M	M	M	M	8200	X	X	X		8200	M	M	P	P
0.010	J	J				0.010	K	M	M		0.010	M	M	M	M	0.010	X	X	X		0.010	M	M	P	P
0.012	J	J				0.012	K	M			0.012	M	M	M	M	0.012	X	X	X		0.012	M	M	P	P
0.015						0.015	M	M			0.015	M	M	M	M	0.015	X	X	X		0.015	M	M	Y	Y
0.018						0.018	M	M			0.018	P	M			0.018	X	X	X		0.018	M	M	Y	Y
0.022						0.022	M	M			0.022	P				0.022	X	X			0.022	M	Y	Y	Y
0.027						0.027	M	M			0.027	P				0.027	X	X			0.027	P	Y	Y	Y
0.033						0.033	M	M			0.033	P				0.033	X	X			0.033	P			
0.039						0.039	M	M			0.039	P				0.039	Y				0.039	P			
0.047						0.047	M	M			0.047	P				0.047	Y				0.047	P			
0.068						0.068	M	M			0.068					0.068					0.068	P			
0.082						0.082	M	M			0.082					0.082					0.082	Q			
0.1						0.1	M	M			0.1					0.1					0.1	Q			
WDC	25	50	100	200	500	25	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500			
SIZE	1210					1812					1825				2220				2225						
Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z												
Max. Thickness	0.33 (0.013)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)												
	PAPER					EMBOSSSED																			

