


# TACmicrochip®

## Standard Microchip


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

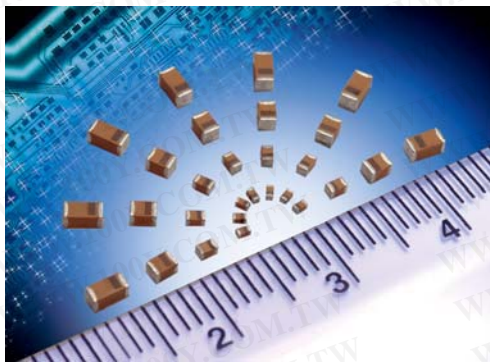

- The world's smallest surface mount tantalum capacitor
- CV range: 0.47-150µF / 2-25V
- 5 case sizes available
- Low profile options available
- Industrial and hi-rel medical applications



### CASE DIMENSIONS: millimeters (inches)



Code	EIA Code	EIA Metric	Length (L)	Width (W)	Height (H)	Termination Spacing(S)	Minimum Termination Length (Lt)	Average Mass
A	1206	3216-18	3.20±0.20 (0.126±0.008)	1.60±0.20 (0.063±0.008)	1.60±0.20 (0.063±0.008)	1.80 min. (0.071 min.)	0.15 (0.006)	44.6mg
B	1210	3528-15	3.50 <sup>+0.20</sup> <sub>-0.20</sub> +0.008 -0.008	2.80 <sup>+0.20</sup> <sub>-0.10</sub> +0.008 -0.004	1.50 max.	2.00 min.	0.15 min.	90.0mg
K	0402	1005-07	1.00 <sup>+0.20</sup> <sub>-0.00</sub> +0.008 -0.000	0.50 <sup>+0.20</sup> <sub>-0.00</sub> +0.008 -0.000	0.50 <sup>+0.20</sup> <sub>-0.00</sub> +0.008 -0.000	0.40 min. (0.016 min.)	0.10 (0.004)	2.8mg
L	0603	1608-10	1.60 <sup>+0.20</sup> <sub>-0.00</sub> +0.008 -0.000	0.85 <sup>+0.15</sup> <sub>-0.00</sub> +0.006 -0.000	0.85 <sup>+0.15</sup> <sub>-0.00</sub> +0.006 -0.000	0.55 min. (0.022 min.)	0.15 (0.006)	8.6mg
R	0805	2012-15	2.00 <sup>+0.20</sup> <sub>-0.00</sub> +0.008 -0.000	1.35 <sup>+0.15</sup> <sub>-0.00</sub> +0.006 -0.000	1.35 <sup>+0.15</sup> <sub>-0.00</sub> +0.006 -0.000	0.70 min. (0.027 min.)	0.15 (0.006)	29.9mg

### HOW TO ORDER

<b>TAC</b> Type TACmicrochip®	<b>L</b> Case Size See table above	<b>226</b> Capacitance Code pF code: 1st two digits represent significant figures, 3rd digit represents multiplier (number of zeros to follow)	<b>M</b> Tolerance K=±10% M=±20%	<b>004</b> Rated DC Voltage 002=2Vdc 003=3Vdc 004=4Vdc 006=6.3Vdc 010=10Vdc 016=16Vdc 020=20Vdc 025=25Vdc 050=50Vdc	<b>R</b> Packaging R, P = 7" Standard Tin Termination Plastic Tape X, Q = 4 1/4" Standard Tin Termination Plastic Tape A = 7" Gold Termination Plastic Tape F = 4 1/4" Gold Termination Plastic Tape	<b>TA</b> Alternative characters may be used for special requirements
-------------------------------------	--	--	---	---	---	--

### TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C										
Capacitance Range:	0.10 µF to 150 µF										
Capacitance Tolerance:	±10%; ±20%										
Leakage Current DCL:	0.01CV or 0.5µA whichever is the greater										
Rated Voltage (V <sub>R</sub> )	≤ +85°C:	2	3	4	6.3	10	16	20	25	50	
Category Voltage (V <sub>C</sub> )	≤ +125°C:	1.3	2	2.7	4	7	10	13	17	33	
Surge Voltage (V <sub>S</sub> )	≤ +85°C:	2.7	3.9	5.2	8	13	20	26	32	65	
Surge Voltage (V <sub>S</sub> )	≤ +125°C:	1.7	2.6	3.2	5	8	12	16	20	40	
Temperature Range:	-55°C to +125°C										
Reliability:	1% per 1000 hours at 85°C, V <sub>R</sub> with 0.1Ω/V series impedance, 60% confidence level										
Termination Finish:	Nickel and Tin Plating (standard), Nickel and Gold Plating option available upon request										



### STANDARD COMMERCIAL RANGE (EIA SIZES) (LETTER DENOTES CASE SIZE)

Capacitance		Voltage Rating DC (V <sub>R</sub> ) at 85°C								
µF	Code	2.0V	3.0V	4.0V	6.3V	10V	16V	20V	25V	50V
0.10	104							K*		
0.15	154									
0.22	224									
0.33	334									
0.47	474					K <sup>(M)</sup> /L	L			
0.68	684					K <sup>(M)</sup> /L	L			
1.0	105				K/L	K/L	L		R	A*
1.5	155			L	L	L	L			
2.2	225		K <sup>(M)</sup> /L	L	K <sup>(M)</sup> /L	L	L			
3.3	335	K <sup>(M)</sup> /L	K <sup>(M)</sup> /L	L	L	L/R	R*	R <sup>(M)</sup>		
4.7	475	K <sup>(M)</sup> /L	K <sup>(M)</sup> /L	L	L	L/R		R <sup>(M)</sup>	A*	
6.8	685	K <sup>(M)</sup> /L	L	L	L/R	L/R				
10	106	K <sup>(M)</sup> /L	L	L/R	L <sup>(M)</sup> /R	L/R	R			
15	156		R	L <sup>(M)</sup> /R	L <sup>(M)</sup> /R	R				
22	226	R	L <sup>(M)</sup> /R	L <sup>(M)</sup> /R	R	R				
33	336	R	R	R	R	A <sup>(M)</sup> /B <sup>(M)</sup> /R <sup>(M)</sup>				
47	476	R	R	R	A/R <sup>(M)</sup>	B				
68	686	R <sup>(M)</sup>	R <sup>(M)</sup>	A <sup>(M)</sup>	A <sup>(M)</sup> *					
100	107		A <sup>(M)</sup> /R <sup>(M)</sup>	A <sup>(M)</sup> /R <sup>(M)</sup>	A <sup>(M)</sup>					
150	157	A <sup>(M)</sup>								
220	227									

Released codes <sup>(M tolerance only)</sup>

\*Codes under development - subject to change.

Standard Height Profile: A, B, K, L, R Case

Low Profile: H, J, T, U, V Case

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### RATINGS & PART NUMBER REFERENCE

AVX Part No.	EIA Code	EIA Metric	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz
<b>2 Volt @ 85°C (1.3 Volt @ 125°C)</b>								
TACK335M002#TA	0402	1005-07	K	3.3	2	0.5	8	15
TACL335*002#TA	0603	1608-10	L	3.3	2	0.5	6	7.5
TACK475M002#TA	0402	1005-07	K	4.7	2	0.5	12	15
TACL475*002#TA	0603	1608-10	L	4.7	2	0.5	6	7.5
TACK685M002#TA	0402	1005-07	K	6.8	2	0.5	20	15
TACL685*002#TA	0603	1608-10	L	6.8	2	0.5	6	7.5
TACK106M002#TA	0402	1005-07	K	10	2	0.5	15	15
TACL106*002#TA	0603	1608-10	L	10	2	0.5	10	7.5
TACR226*002#TA	0805	2012-15	R	22	2	0.5	8	5
TACR336*002#TA	0805	2012-15	R	33	2	0.7	10	5
TACR476*002#TA	0805	2012-15	R	47	2	0.9	10	5
TACR686M002#TA	0805	2012-15	R	68	2	1.4	14	5
TACA157M002#TA	1206	3216-18	A	150	2	3	20	1
<b>3 Volt @ 85°C (2 Volt @ 125°C)</b>								
TACK225M003#TA	0402	1005-07	K	2.2	3	0.5	6	15
TACL225*003#TA	0603	1608-10	L	2.2	3	0.5	6	7.5
TACK335M003#TA	0402	1005-07	K	3.3	3	0.5	8	15
TACL335*003#TA	0603	1608-10	L	3.3	3	0.5	6	7.5
TACK475M003#TA	0402	1005-07	K	4.7	3	0.5	12	15
TACL475*003#TA	0603	1608-10	L	4.7	3	0.5	6	7.5
TACL685*003#TA	0603	1608-10	L	6.8	3	0.5	6	7.5
TACL106*003#TA	0603	1608-10	L	10	3	0.5	10	7.5
TACR156*003#TA	0805	2012-15	R	15	3	0.5	8	5
TACR226M003#TA	0603	1608-10	L	22	3	0.7	20	7.5
TACR226*003#TA	0805	2012-15	R	22	3	0.7	8	5
TACR336*003#TA	0805	2012-15	R	33	3	1	10	5
TACR476*003#TA	0805	2012-15	R	47	3	1.5	10	5
TACR686M003#TA	0805	2012-15	R	68	3	2	14	5
TACA107M003#TA	1206	3216-18	A	100	3	3	15	1
TACR107M003#TA	0805	2012-15	R	100	3	3	30	5
<b>4 Volt @ 85°C (2.7 Volt @ 125°C)</b>								
TACL155*004#TA	0603	1608-10	L	1.5	4	0.5	6	7.5
TACL225*004#TA	0603	1608-10	L	2.2	4	0.5	6	7.5
TACL335*004#TA	0603	1608-10	L	3.3	4	0.5	6	7.5
TACL475*004#TA	0603	1608-10	L	4.7	4	0.5	6	7.5
TACL685*004#TA	0603	1608-10	L	6.8	4	0.5	8	7.5
TACL106*004#TA	0603	1608-10	L	10	4	0.5	10	7.5
TACR106*004#TA	0805	2012-15	R	10	4	0.5	8	5
TACL156M004#TA	0603	1608-10	L	15	4	0.6	20	7.5
TACR156*004#TA	0805	2012-15	R	15	4	0.6	8	5
TACL226M004#TA	0603	1608-10	L	22	4	0.9	20	7.5
TACR226*004#TA	0805	2012-15	R	22	4	0.9	8	5
TACR336*004#TA	0805	2012-15	R	33	4	1.3	10	5
TACR476*004#TA	0805	2012-15	R	47	4	1.9	14	5
TACA686M004#TA	1206	3216-18	A	68	4	2.7	15	1
TACA107M004#TA	1206	3216-18	A	100	4	4	20	1
TACR107M004#TA	0805	2012-15	R	100	4	4	30	5
<b>6.3 Volt @ 85°C (4 Volt @ 125°C)</b>								
TACK105*006#TA	0402	1005-07	K	1	6.3	0.5	6	15
TACL105*006#TA	0603	1608-10	L	1	6.3	0.5	6	7.5
TACL155*006#TA	0603	1608-10	L	1.5	6.3	0.5	6	7.5
TACK225M006#TA	0402	1005-07	K	2.2	6.3	0.5	8	15
TACL225*006#TA	0603	1608-10	L	2.2	6.3	0.5	6	7.5

AVX Part No.	EIA Code	EIA Metric	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz
<b>10 Volt @ 85°C (7 Volt @ 125°C)</b>								
TACL335*006#TA	0603	1608-10	L	3.3	6.3	0.5	6	7.5
TACL475*006#TA	0603	1608-10	L	4.7	6.3	0.5	8	7.5
TACL685*006#TA	0603	1608-10	L	6.8	6.3	0.5	10	7.5
TACR685*006#TA	0805	2012-15	R	6.8	6.3	0.5	8	5
TACL106M006#TA	0603	1608-10	L	10	6.3	0.6	10	6
TACR106*006#TA	0805	2012-15	R	10	6.3	0.6	8	5
TACL156M006#TA	0603	1608-10	L	15	6.3	0.9	20	7.5
TACR156*006#TA	0805	2012-15	R	15	6.3	0.9	8	5
TACR226*006#TA	0805	2012-15	R	22	6.3	1.4	10	5
TACR336*006#TA	0805	2012-15	R	33	6.3	2.1	12	5
TACA476*006#TA	1206	3216-18	A	47	6.3	3	15	1
TACR476M006#TA	0805	2012-15	R	47	6.3	3	20	5
TACA686M006#TA	1206	3216-18	A	68	6.3	4.3	15	1
TACA107M006#TA	1206	3216-18	A	100	6.3	6.3	20	1
<b>16 Volt @ 85°C (10 Volt @ 125°C)</b>								
TACK474M10#TA	0402	1005-07	K	0.47	10	0.5	6	15
TACL474*010#TA	0603	1608-10	L	0.47	10	0.5	6	7.5
TACK684M10#TA	0402	1005-07	K	0.68	10	0.5	8	15
TACL684*010#TA	0603	1608-10	L	0.68	10	0.5	6	7.5
TACK105*010#TA	0402	1005-07	K	1	10	0.5	6	15
TACL105*010#TA	0603	1608-10	L	1	10	0.5	6	7.5
TACL155*010#TA	0603	1608-10	L	1.5	10	0.5	6	7.5
TACL225*010#TA	0603	1608-10	L	2.2	10	0.5	6	7.5
TACL335*010#TA	0603	1608-10	L	3.3	10	0.5	8	7.5
TACR335*010#TA	0805	2012-15	R	3.3	10	0.5	8	5
TACL475*010#TA	0603	1608-10	L	4.7	10	0.5	10	6
TACR475*010#TA	0805	2012-15	R	4.7	10	0.5	8	6
TACL685*010#TA	0603	1608-10	L	6.8	10	0.7	20	7.5
TACR685*010#TA	0805	2012-15	R	6.8	10	0.7	8	5
TACL106*010#TA	0603	1608-10	L	10	10	1	20	7.5
TACR106*010#TA	0805	2012-15	R	10	10	1	8	5
TACR156*010#TA	0805	2012-15	R	15	10	1.5	10	5
TACR226*010#TA	0805	2012-15	R	22	10	2.2	14	5
TACA336M10#TA	1206	3216-18	A	33	10	3.3	12	1
TACB336*010#TA	1210	3528-15	B	33	10	3.3	15	1
TACR336M10#TA	0805	2012-15	R	33	10	3.3	20	5
TACB476*010#TA	1210	3528-15	B	47	10	4.7	15	1
<b>25 Volt @ 85°C (17 Volt @ 125°C)</b>								
TACL474*016#TA	0603	1608-10	L	0.47	16	0.5	6	7.5
TACL684*016#TA	0603	1608-10	L	0.68	16	0.5	6	7.5
TACL105*016#TA	0603	1608-10	L	1	16	0.5	6	7.5
TACL225*016#TA	0603	1608-10	L	2.2	16	0.5	10	7.5
TACR335*016#TA	0805	2012-15	R	3.3	16	0.5	8	5
TACR106*016#TA	0805	2012-15	R	10	16	1.6	10	5
<b>50 Volt @ 85°C (33 Volt @ 125°C)</b>								
TACK104*020#TA	0402	1005-07	K	0.10	20	0.5	6	40
TACR335M020#TA	0805	2012-15	R	3.3	20	0.7	8	5
TACR475M020#TA	0805	2012-15	R	4.7	20	0.9	8	5
<b>25 Volt @ 85°C (17 Volt @ 125°C)</b>								
TACR105*025#TA	0805	2012-15	R	1	25	0.5	8	5
TACA475*025#TA	1206	3216-18	A	4.7	25	1.2	8	1

\* Insert K for ±10% and M for ±20% Capacitance Tolerance

# Refers to termination finished and packaging reel size

MSL level: See page 123 (6. Moisture Sensitivity Level) or packaging and reel label.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

**NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.**

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)