

PHE820

- EMI suppressor, class X2, metallized polyester
- 0.01 – 2.2 μF , 275/300 VAC, +100°C

RoHS
Compliant

TYPICAL APPLICATIONS


The capacitors are intended for use as Interference suppressor in X2 and across-the-line applications.

CONSTRUCTION

Series winding of metallized polyester, encapsulated in self-extinguishing material meeting the requirements of UL 94V-0.

TECHNICAL DATA

	PHE820 M	PHE820 E
Rated voltage	275 VAC 50/60 Hz	300 VAC 50/60 Hz
Capacitance range	0.01 – 2.2 μF	0.01 – 2.2 μF
Capacitance tolerance	$\pm 20\%$ standard, $\pm 10\%$ option	
Temperature range	-40 to +100°C	
Climatic category	40/100/56/B	
Approvals	ENEC, UL, CSA	
Dissipation factor $\tan\delta$	$\leq 1.0\%$ at 1 kHz	
Insulation resistance	$C \leq 0.33 \mu\text{F} \geq 30\,000 \text{ M}\Omega$ $C > 0.33 \mu\text{F} \geq 10\,000 \text{ s}$	
Resonance frequency	Tabulated self-resonance frequencies f_0 refer to 5 mm lead length.	
Test voltage between terminals	The 100% screening factory test is carried out at 2150 VDC. The voltage level is selected to meet the requirements in applicable equipment standards. All electrical characteristics are checked after the test.	
In DC applications	Recommended voltage $\leq 760 \text{ VDC}$	

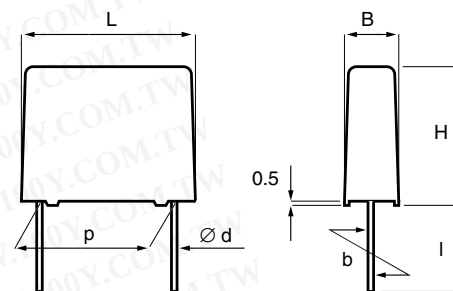

p	d	std l	max l	b
15.0 $\pm$ 0.4	0.8	17	30	± 0.4
22.5 $\pm$ 0.4	0.8	6	30	± 0.4
27.5 $\pm$ 0.4	0.8	6	30	± 0.4
37.5 $\pm$ 0.5	1.0	6	30	± 0.7

Tolerance in lead length

< 30 mm $+0$ mm

30 mm $+5$ mm

ENVIRONMENTAL TEST DATA

Endurance	EN/IEC 60384-14: 2005	1.25 x U_R VAC 50 Hz, once every hour increased to 1000 VAC for 0.1 s, 1000 h at upper rated temp.	
Vibration	IEC 60068-2-6 Test Fc	3 directions at 2 hours each, 10 – 55 Hz at 0.75 mm or 98 m/s ²	No visible damage No open or short circuit
Bump	IEC 60068-2-29 Test Eb	1000 bumps at 390 m/s ²	No visible damage No open or short circuit
Change of temperature	IEC 60068-2-14 Test Na	Upper and lower rated temperature 5 cycles	No visible damage
Active flammability	EN/IEC 60384-14: 2005		
Passive flammability	EN/IEC 60384-14: 2005		
Humidity	IEC 60068-2-3 Test Ca	+40°C and 90 – 95% R.H.	56 days

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ARTICLE TABLE

Capacitance* μF	Box code	Max dimensions in mm			f _o MHz	Max dU/dt V/μs	Article code	Capacitance* μF	Box code	Max dimensions in mm			f _o MHz	Max dU/dt V/μs	Article code
275 VAC, PHE820M								300 VAC, PHE820E							
LEAD SPACING 15 MM								LEAD SPACING 15 MM							
0.010	B04	5.5	10.5	18.0	13	100	PHE820MB5100MR17	0.010	B04	5.5	10.5	18.0	13	100	PHE820EB5100MR17
0.015	B04	5.5	10.5	18.0	11	100	PHE820MB5150MR17	0.015	B04	5.5	10.5	18.0	11	100	PHE820EB5150MR17
0.022	B04	5.5	10.5	18.0	9.0	100	PHE820MB5220MR17	0.022	B04	5.5	10.5	18.0	9.0	100	PHE820EB5220MR17
0.033	B05	5.5	12.5	18.0	7.5	100	PHE820MB5330MR17	0.033	B05	5.5	12.5	18.0	7.5	100	PHE820EB5330MR17
0.047	B10	6.5	12.5	18.0	6.5	100	PHE820MB5470MR17	0.047	B10	6.5	12.5	18.0	6.5	100	PHE820EB5470MR17
0.068	B06	7.5	14.5	18.0	5.5	100	PHE820MB5680MR17	0.068	B06	7.5	14.5	18.0	5.5	100	PHE820EB5680MR17
0.10	B11	8.5	16.0	18.0	4.5	100	PHE820MB6100MR17	0.10	B11	8.5	16.0	18.0	4.5	100	PHE820EB6100MR17
LEAD SPACING 22.5 MM								LEAD SPACING 22.5 MM							
0.10	D13	6.5	14.5	26.0	4.5	100	PHE820MD6100MR06L2	0.10	D13	6.5	14.5	26.0	4.5	100	PHE820ED6100MR06L2
0.15	D14	8.0	16.0	26.0	3.9	100	PHE820MD6150MR06L2	0.15	D14	8.0	16.0	26.0	3.9	100	PHE820ED6150MR06L2
0.22	D15	9.0	18.5	26.0	2.7	100	PHE820MD6220MR06L2	0.22	D15	9.0	18.5	26.0	2.7	100	PHE820ED6220MR06L2
0.33	D16	11.0	21.5	26.0	2.5	100	PHE820MD6330MR06L2	0.33	D16	11.0	21.5	26.0	2.5	100	PHE820ED6330MR06L2
LEAD SPACING 27.5 MM								LEAD SPACING 27.5 MM							
0.47	F12	11.5	22.5	31.5	1.9	100	PHE820MF6470MR06L2	0.33	F11	10.5	20.5	31.5	2.4	100	PHE820EF6330MR06L2
0.68	F13	14.5	24.5	31.5	1.6	100	PHE820MF6680MR06L2	0.47	F12	11.5	22.5	31.5	1.9	100	PHE820EF6470MR06L2
1.0	F14	17.5	28.0	31.5	1.3	100	PHE820MF7100MR06L2	0.68	F13	14.5	24.5	31.5	1.6	100	PHE820EF6680MR06L2
LEAD SPACING 37.5 MM								1.0	F14	17.5	28.0	31.5	1.3	100	PHE820EF7100MR06L2
LEAD SPACING 37.5 MM								LEAD SPACING 37.5 MM							
1.5	R02	16.5	32.0	41.0	0.75	100	PHE820MR7150MR06L2	1.5	R02	16.5	32.0	41.0	0.75	100	PHE820ER7150MR06L2
2.2	R03	19.0	36.0	41.0	0.65	100	PHE820MR7220MR06L2	2.2	R03	19.0	36.0	41.0	0.65	100	PHE820ER7220MR06L2

*The complete serie includes C values according to the E12 series.
Details on request.

APPROVALS

Certification Body	Specification	
ENEC	EN/IEC 60384-14:2005	
UL	UL 1283	(U _R = 250 VAC)
	UL 1414	(U _R = 250 VAC)
CSA	C 22.2 No.8	(U _R = 125 VAC)
	C 22.2 No.1	(≤ 0.47 μF)

MARKING

- RIFA
- RIFA article code
- Rated capacitance
- Capacitance tolerance code
- Rated voltage
- X2
- Approval marks
- Manufacturing code (year, month)
- Climatic category according to IEC 60068-1, appendix A
- Passive flammability class

ORDERING INFORMATION

The article code for the standard part is given in the article table.
For other options, see page 11.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)