


X2 CLASS (IEC 60384-14) - MKP Series
METALLIZED POLYPROPYLENE FILM CAPACITOR
 SELF-HEALING PROPERTIES

Typical applications: interference suppression and «across-the-line» applications. Suitable for use in situations where failure of the capacitor would not lead to danger of electric shock.

PRODUCT CODE: **R46**

Note: R.46 series has replaced the 1.40 series and 1.47 series. For new design we suggest the use of the R.46 series.

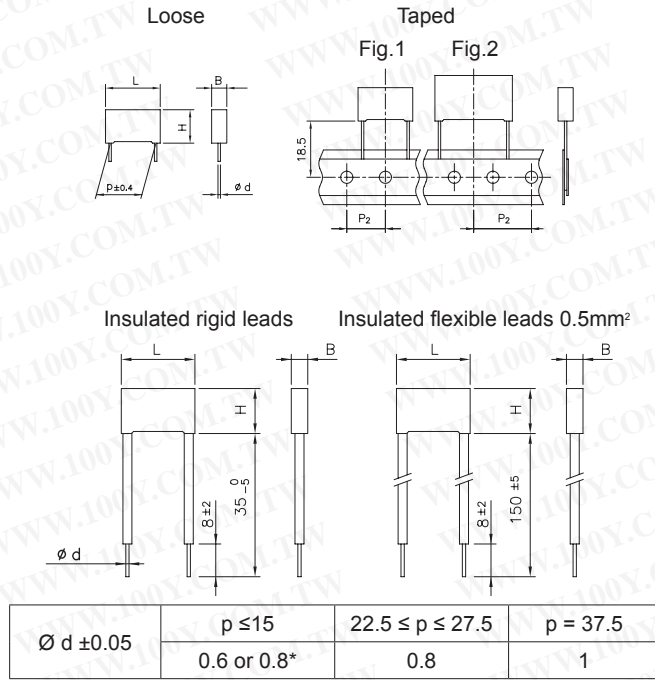

*See size table.
 All dimensions are in mm.

GENERAL TECHNICAL DATA

- Dielectric:** polypropylene film.
- Plates:** metal layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire.
- Protection:** plastic case, thermosetting resin filled. Box material is solvent resistant and flame retardant according to UL94 V0.
- Marking:** Manufacturer's logo, series, capacitance, tolerance, rated voltage, capacitor class, dielectric code, climatic category, passive flammability category, manufacturing date code, approvals, manufacturing plant.
- Climatic category:** 40/110/56 IEC 60068-1

Operating temperature range: -40 to +110°C
Related documents: IEC 60384-14, EN 60384-14.

ELECTRICAL CHARACTERISTICS

Rated voltage (V_R): 275Vac (50/60Hz) / 560 Vdc
 300Vac (50/60Hz) / 630 Vdc

Capacitance range: 0.01µF to 10µF
Capacitance values: E6 series (IEC 60063 Norm).
Capacitance tolerances (measured at 1 kHz):
 ±10% (K); ±20% (M);
 tolerance ±5% (J) available upon request

Dissipation factor (DF):
 tgδ 10⁻⁴ at +25°C ±5°C: ≤10 (6)* at 1kHz
 * Typical value

Insulation resistance:

Test conditions
 Temperature: +25°C±5°C
 Voltage charge time: 1 min
 Voltage charge: 100 Vdc
Performance
 ≥1x10⁵ MΩ (5x10⁵ MΩ)* for C≤0.33µF
 ≥30000 s (150000 s)* for C>0.33µF
 * Typical value

Test voltage between terminations (on all pieces):
 1500Vac for 1 s + 2200Vdc for 1 s at +25°C±5°C

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions 1st
 Temperature: +40°C ± 2°C
 Relative humidity (RH): 93% ±2%
 Test duration: 56 days

Test conditions 2nd
 Temperature: +60°C ± 2°C
 Relative humidity (RH): 95% ±2%
 Test duration: 500 hours

Performance
 Dielectric strength: no dielectric breakdown or flashover at 4.3 x V_R (d.c.)/1 min
 Capacitance change |ΔC/C|: ≤5%
 Insulation resistance: ≥50% of initial limit.

Endurance:

Test conditions
 Temperature: +110°C ± 2°C
 Test duration: 1000 h
 Voltage applied: 1.25 x V_R +1000Vac 0.1 s/h


Performance
 Dielectric strength: no dielectric breakdown or flashover at 4.3 x V_R (d.c.)/1 min
 Capacitance change |ΔC/C|: ≤10%
 Insulation resistance: ≥50% of initial limit.

Resistance to soldering heat:

Test conditions
 Solder bath temperature: +260°C ± 5°C
 Dipping time (with heat screen): 10 s ± 1 s

Performance
 Capacitance change |ΔC/C|: ≤2%

Winding scheme

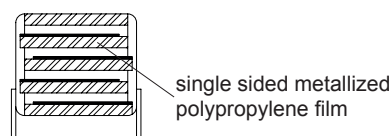

X2 CLASS (IEC 60384-14) - MKP Series
METALLIZED POLYPROPYLENE FILM CAPACITOR
 SELF-HEALING PROPERTIES

APPROVALS

| Rated Cap. | 275 Vac / 560 Vdc Std dimensions | | | | Ø d | Max dv/dt at 390Vdc (V/µs) | Part Number | | |
|------------|-------------------------------------|------|------|------|-----|-------------------------------------|-------------|------|---------|
| | B | H | L | p | | | | | |
| 0.010 µF | 4.0 | 9.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2100 | -- N0 - |
| 0.015 µF | 4.0 | 9.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2150 | -- N0 - |
| 0.022 µF | 4.0 | 9.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2220 | -- N0 - |
| 0.033 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2330 | -- M1 - |
| 0.047 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2470 | -- N0 - |
| 0.068 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2680 | -- M1 - |
| 0.10 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 3100 | -- M1 M |
| 0.010 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 2100 | -- 01 - |
| 0.015 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 2150 | -- 01 - |
| 0.022 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 2220 | -- 01 - |
| 0.033 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 2330 | -- 01 - |
| 0.047 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 2470 | -- 01 - |
| 0.068 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 2680 | -- 01 - |
| 0.10 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3100 | -- M1 - |
| 0.15 µF | 6.0 | 12.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3150 | -- M2 - |
| 0.15 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3150 | -- L2 - |
| 0.22 µF | 7.5 | 13.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3220 | -- M2 - |
| 0.22 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3220 | -- L2 - |
| 0.22 µF | 6.0 | 17.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3220 | -- 02 - |
| 0.33 µF | 8.5 | 14.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3330 | -- N0 - |
| 0.33 µF | 10.0 | 16.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3330 | -- M1 - |
| 0.33 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3330 | -- N1 M |
| 0.33 µF | 7.5 | 18.5 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3330 | -- 02 - |
| 0.33 µF | 13.0 | 12.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3330 | -- 01 - |
| 0.47 µF | 7.5 | 18.5 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3470 | -- 02 M |
| 0.47 µF | 10.0 | 16.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3470 | -- N0 M |
| 0.47 µF | 11.0 | 19.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3470 | -- M1 - |
| 0.56 µF | 11.0 | 19.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3560 | -- N0 - |
| 0.60 µF | 11.0 | 19.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3600 | -- N0 - |
| 0.15 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3150 | -- 01 - |
| 0.22 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3220 | -- M1 - |
| 0.33 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3330 | -- N0 - |
| 0.47 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3470 | -- N0 - |
| 0.68 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3680 | -- M2 - |
| 1.0 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4100 | -- N2 M |
| 1.0 µF | 11.0 | 20.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4100 | -- N1 - |
| 0.47 µF | 9.0 | 17.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 3470 | -- 01 - |
| 0.68 µF | 9.0 | 17.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 3680 | -- M1 - |
| 1.0 µF | 11.0 | 20.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4100 | -- M1 - |
| 1.5 µF | 13.0 | 22.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4150 | -- M1 - |
| 2.2 µF | 13.0 | 25.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4220 | -- M2 - |
| 2.2 µF | 14.0 | 28.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4220 | -- M1 - |
| 3.3 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4330 | -- M2 - |
| 4.7 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4470 | -- M2 - |
| 4.7 µF | 22.0 | 37.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4470 | -- M1 - |
| 1.5 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4150 | -- M1 - |
| 2.2 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4220 | -- M2 M |
| 2.2 µF | 13.0 | 24.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4220 | -- M1 - |
| 3.3 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4330 | -- M1 - |
| 4.7 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4470 | -- M2 M |
| 4.7 µF | 19.0 | 32.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4470 | -- M1 - |
| 6.8 µF | 20.0 | 40.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4680 | -- M2 - |
| 6.8 µF | 24.0 | 44.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4680 | -- M1 - |
| 10.0 µF | 30.0 | 45.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 5100 | -- M1 - |

Rated voltage (K=275Vac)
 Mechanical version and packaging (Table 1)
 Tolerance: K (±10%); M (±20%)

All dimensions are in mm

E12 Series available upon request

| | | | |
|--|---|--|-------------------------------------|
| | ENEC IEC 60384-14 | Class X2 | File No.V4413 |
| | CSA E 384-14 (up to 5.6µF) | Across-the-line | File No.154612 (LR 83890) |
| | UL 1414 (up to 1µF, 85°C; 250Vac) | Across-the-line | File No.E97797 |
| | UL 1283 (310 Vac) | Electromagnetic Interference Filters | File No.E85238 |
| | GB/T 14472 | Class X2 | File CQC3001008199 CQC3001008842 |

Approved according to IEC 60384-14 (ex-former EN 132400)
 According to IEC 60065

(**) ENEC mark has replaced all the following European
 National marks:



Table 1

| Standard packaging style | Lead length (mm) | Taping style | | | Ordering code (Digit 10 to 11) |
|------------------------------------|------------------------|------------------------|---------------|---------------|---|
| | | P ₂ (mm) | Fig. (No.) | Pitch (mm) | |
| AMMO-PACK | | 12.70 | 1 | 10.0/15.0 | DQ |
| AMMO-PACK | | 19.05 | 2 | 22.5 | DQ |
| REEL Ø500mm | | 12.70 | 1 | 10.0/15.0 | CK |
| REEL Ø500mm | | 19.05 | 2 | 22.5/27.5 | CK |
| Loose, short leads | 4 ⁺² | | | | 00 |
| Loose, long leads | 25 ^{-1/+2} | | | | 50 |
| Loose, long leads | 30 ⁺⁵ | | | | 40 |
| Loose, insulated rigid leads | 30 ⁺⁵ | | | | 51 |
| Loose, insulated flexible leads | 150 ⁺⁵ | | | | 52 |

Note: Ammo-pack is the preferred packaging for taped version.

For "capacitor connected in serial with main line" (two - phase and
 three - phase net) application, please read the "SHORT GUIDE TO
 CHOOSE THE RIGHT FILM CAPACITORS" at pag. 152 and contact
 our Technical Service for choosing the safest solution.

X2 CLASS (IEC 60384-14) - MKP Series
METALLIZED POLYPROPYLENE FILM CAPACITOR
 SELF-HEALING PROPERTIES

APPROVALS

| Rated Cap. | 275 Vac / 560 Vdc Std dimensions | | | | Ø d | Max dv/dt at 390Vdc (V/µs) | Part Number | |
|------------|-------------------------------------|------|------|------|-----|-------------------------------------|-------------|--------------|
| | B | H | L | p | | | | |
| 0.033 µF | 4.0 | 9.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2330 -- P0 - |
| 0.047 µF | 4.0 | 9.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2470 -- P0 - |
| 0.068 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2680 -- P0 - |
| 0.1 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 3100 -- P1 M |
| 0.1 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 3100 -- P0 - |
| 0.15 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 3150 -- P0 M |
| 0.15 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3150 -- P0 - |
| 0.22 µF | 6.0 | 12.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3220 -- P0 - |
| 0.33 µF | 7.5 | 13.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3330 -- P0 - |
| 0.33 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3330 -- P1 |
| 0.33 µF | 6.0 | 17.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3330 -- P2 - |
| 0.47 µF | 8.5 | 14.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3470 -- P0 - |
| 0.47 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3470 -- P1 M |
| 0.47 µF | 6.0 | 17.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3470 -- P2 M |
| 0.47 µF | 7.5 | 18.5 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3470 -- P3 - |
| 0.68 µF | 10.0 | 16.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3680 -- P1 M |
| 0.68 µF | 11.0 | 19.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3680 -- P0 - |
| 0.82 µF | 11.0 | 19.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3820 -- P0 M |
| 0.47 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3470 -- P1 - |
| 0.56 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3560 -- P1 M |
| 0.56 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3560 -- P0 - |
| 0.68 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3680 -- P0 - |
| 1.0 µF | 8.5 | 17.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4100 -- P1 M |
| 1.0 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4100 -- P0 - |
| 1.5 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4150 -- P1 M |
| 1.5 µF | 11.0 | 20.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4150 -- P0 - |
| 2.2 µF | 13.0 | 22.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4220 -- P0 M |
| 1.0 µF | 9.0 | 17.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4100 -- P0 - |
| 1.5 µF | 11.0 | 20.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4150 -- P0 - |
| 2.2 µF | 13.0 | 22.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4220 -- P0 - |
| 3.3 µF | 14.0 | 28.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4330 -- P0 - |
| 4.7 µF | 14.0 | 28.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4470 -- P1 M |
| 4.7 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4470 -- P0 - |
| 6.8 µF | 22.0 | 37.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4680 -- P0 - |
| 2.2 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4220 -- P0 - |
| 3.3 µF | 13.0 | 24.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4330 -- P0 - |
| 4.7 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4470 -- P0 - |
| 6.8 µF | 19.0 | 32.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4680 -- P0 - |
| 10.0 µF | 20.0 | 40.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 5100 -- P0 - |

Rated voltage (K=275Vac)
 Mechanical version and packaging (Table 1)
 Tolerance: K (±10%); M (±20%)

| | | | |
|--|---|--|---|
| | ENEC IEC 60384-14 | Class X2 | File No.V4413 |
| | CSA E 384-14 (up to 5.6µF) | Across-the-line | File No.154612 (LR 83890) in progress |
| | UL 1414 (up to 1µF, 85°C; 250Vac) | Across-the-line | File No.E97797 in progress |
| | UL 1283 (310 Vac) | Electromagnetic Interference Filters | File No.E85238 |
| | GB/T 14472 | Class X2 | File CQC3001008199 CQC3001008842 |

Approved according to IEC 60384-14 (ex-former EN 132400)
 According to IEC 60065

(**) ENEC mark has replaced all the following European
 National marks:



Table 1

| Standard packaging style | Lead length (mm) | Taping style | | | Ordering code (Digit 10 to 11) |
|------------------------------------|------------------------|------------------------|---------------|---------------|--------------------------------------|
| | | P ₂ (mm) | Fig. (No.) | Pitch (mm) | |
| AMMO-PACK | | 12.70 | 1 | 10.0/15.0 | DQ |
| AMMO-PACK | | 19.05 | 2 | 22.5 | DQ |
| REEL Ø500mm | | 12.70 | 1 | 10.0/15.0 | CK |
| REEL Ø500mm | | 19.05 | 2 | 22.5/27.5 | CK |
| Loose, short leads | 4 ⁺² | | | | 00 |
| Loose, long leads | 25 ^{-1/+2} | | | | 50 |
| Loose, long leads | 30 ⁺⁵ | | | | 40 |
| Loose, insulated rigid leads | 30 ⁺⁵ | | | | 51 |
| Loose, insulated flexible leads | 150 ^{±5} | | | | 52 |

Note: Ammo-pack is the preferred packaging for taped version.

For "capacitor connected in serial with main line" (two - phase and three - phase net) application, please read the "SHORT GUIDE TO CHOOSE THE RIGHT FILM CAPACITORS" at pag. 152 and contact our Technical Service for choosing the safest solution.

All dimensions are in mm

E12 Series available upon request

X2 CLASS (IEC 60384-14) - MKP Series
METALLIZED POLYPROPYLENE FILM CAPACITOR
 SELF-HEALING PROPERTIES

APPROVALS

| Rated Cap. | 300 Vac / 630 Vdc Std dimensions | | | | Ø d | Max dv/dt at 390Vdc (V/µs) | Part Number | | | |
|------------|-------------------------------------|------|------|------|-----|-------------------------------------|-------------|------------|---|--|
| | B | H | L | p | | | | | | |
| 0.010 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 3F | 2100 -- M1 | - | |
| 0.015 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 3F | 2150 -- M1 | - | |
| 0.022 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 3F | 2220 -- M1 | - | |
| 0.033 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 3F | 2330 -- M1 | - | |
| 0.047 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 3F | 2470 -- M1 | - | |
| 0.068 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 3F | 2680 -- M1 | - | |
| 0.1 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 3F | 3100 -- M1 | M | |
| 0.010 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 2100 -- 01 | - | |
| 0.015 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 2150 -- 01 | - | |
| 0.022 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 2220 -- 01 | - | |
| 0.033 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 2330 -- 01 | - | |
| 0.047 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 2470 -- 01 | - | |
| 0.068 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 2680 -- 01 | - | |
| 0.10 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 3100 -- M1 | M | |
| 0.10 µF | 6.0 | 12.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 3100 -- 01 | - | |
| 0.15 µF | 6.0 | 12.0 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 3150 -- M2 | M | |
| 0.15 µF | 7.5 | 13.5 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 3150 -- 01 | - | |
| 0.22 µF | 7.5 | 13.5 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 3220 -- M2 | M | |
| 0.22 µF | 8.5 | 14.5 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 3220 -- M1 | - | |
| 0.22 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 3I | 3220 -- L2 | - | |
| 0.33 µF | 10.0 | 16.0 | 18.0 | 15.0 | 0.8 | 400 | R46 3I | 3330 -- M1 | - | |
| 0.33 µF | 13.0 | 12.0 | 18.0 | 15.0 | 0.8 | 400 | R46 3I | 3330 -- 01 | - | |
| 0.47 µF | 11.0 | 19.0 | 18.0 | 15.0 | 0.8 | 400 | R46 3I | 3470 -- M1 | - | |
| 0.15 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 3N | 3150 -- 01 | - | |
| 0.22 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 3N | 3220 -- M1 | - | |
| 0.33 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R46 3N | 3330 -- M1 | - | |
| 0.47 µF | 8.5 | 17.0 | 26.5 | 22.5 | 0.8 | 200 | R46 3N | 3470 -- M1 | - | |
| 0.68 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46 3N | 3680 -- M2 | - | |
| 1.0 µF | 13.0 | 22.0 | 26.5 | 22.5 | 0.8 | 200 | R46 3N | 4100 -- M1 | - | |
| 0.47 µF | 9.0 | 17.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 3470 -- 01 | - | |
| 0.68 µF | 9.0 | 17.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 3680 -- M1 | - | |
| 1.0 µF | 11.0 | 20.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4100 -- M1 | - | |
| 1.5 µF | 13.0 | 22.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4150 -- M1 | - | |
| 2.2 µF | 13.0 | 25.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4220 -- M2 | - | |
| 2.2 µF | 14.0 | 28.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4220 -- M1 | - | |
| 2.2 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4220 -- 01 | - | |
| 3.3 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4330 -- M2 | - | |
| 3.3 µF | 22.0 | 37.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4330 -- M1 | - | |
| 4.7 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4470 -- M2 | - | |
| 4.7 µF | 22.0 | 37.0 | 32.0 | 27.5 | 0.8 | 150 | R46 3R | 4470 -- M1 | - | |
| 1.5 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 4150 -- M1 | - | |
| 2.2 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 4220 -- M2 | M | |
| 2.2 µF | 13.0 | 24.0 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 4220 -- M1 | - | |
| 3.3 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 4330 -- M1 | - | |
| 4.7 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 4470 -- M2 | M | |
| 4.7 µF | 19.0 | 32.0 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 4470 -- M1 | - | |
| 6.8 µF | 20.0 | 40.0 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 4680 -- M2 | - | |
| 6.8 µF | 24.0 | 44.0 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 4680 -- M1 | - | |
| 10.0 µF | 30.0 | 45.0 | 41.5 | 37.5 | 1.0 | 100 | R46 3W | 5100 -- M1 | - | |

Rated voltage (3=300Vac)
 Mechanical version and packaging (Table 1)
 Tolerance: K (±10%); M (±20%)

All dimensions are in mm
 E12 Series available upon request

| | | | |
|--|---------------------------------------|--|-------------------------------------|
| | ENEC IEC 60384-14 | Class X2 | File No.V4413 |
| | CSA E 384-14-95 (up to 5.6µF) | Across-the-line | File No.154612 (LR 83890) |
| | UL 1414 up to 1µF, 85°C; 250Vac | Across-the-line | File No.E97797 |
| | UL 1283 (310 Vac) | Electromagnetic Interference Filters | File No.E85238 |
| | GB/T 14472 | Class X2 | File CQC3001008199 CQC3001008842 |

Approved according to IEC 60384-14 (ex-former EN 132400)
 According to IEC 60065

(**) ENEC mark has replaced all the following European
 National marks:

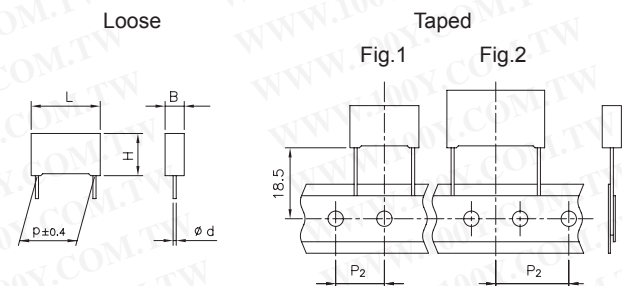


Table 1

| Standard packaging style | Lead length (mm) | Taping style | | | Ordering code (Digit 10 to 11) |
|------------------------------------|------------------------|------------------------|---------------|---------------|--------------------------------------|
| | | P ₂ (mm) | Fig. (No.) | Pitch (mm) | |
| AMMO-PACK | | 12.70 | 1 | 10.0/15.0 | DQ |
| AMMO-PACK | | 19.05 | 2 | 22.5 | DQ |
| REEL Ø500mm | | 12.70 | 1 | 10.0/15.0 | CK |
| REEL Ø500mm | | 19.05 | 2 | 22.5/27.5 | CK |
| Loose, short leads | 4 ⁺² | | | | 00 |
| Loose, long leads | 25 ^{-1/+2} | | | | 50 |
| Loose, long leads | 30 ⁺⁵ | | | | 40 |
| Loose, insulated rigid leads | 30 ⁺⁵ | | | | 51 |
| Loose, insulated flexible leads | 150 ⁺⁵ | | | | 52 |

Note: Ammo-pack is the preferred packaging for taped version.

For "capacitor connected in serial with main line" (two - phase and
 three - phase net) application, please read the "SHORT GUIDE TO
 CHOOSE THE RIGHT FILM CAPACITORS" at pag. 152 and contact
 our Technical Service for choosing the safest solution.



| | | |
|-----------|-------------|----------|
| Ø d ±0.05 | p ≤ 15 | p = 22.5 |
| | 0.6 or 0.8* | 0.8 |

*See size table.
 All dimensions are in mm.

GENERAL TECHNICAL DATA

Dielectric: polypropylene film.
Plates: metal layer deposited by evaporation under vacuum.
Winding: non-inductive type.
Leads: tinned wire.
Protection: plastic case, thermosetting resin filled. Box material is solvent resistant and flame retardant according to UL94 V0.
Marking: Manufacturer's logo, series, capacitance, tolerance, rated voltage, capacitor class, dielectric code, climatic category, passive flammability category, manufacturing date code, approvals, manufacturing plant.
Climatic category: 40/125/56 IEC 60068-1
Operating temperature range: -40 to +125°C
Related documents: IEC 60384-14; EN 60384-14

ELECTRICAL CHARACTERISTICS

Rated voltage (V_R): 275 Vac (50/60Hz) / 560 Vdc
Capacitance range: 0.01µF to 1µF

TEST METHOD AND PERFORMANCE

Endurance:
Test conditions
 Temperature: +125°C±2°C
 Test duration: 1000 h
 Voltage applied: 1.25 x V_R +1000Vac 0.1 s/h
Performance
 Dielectric strength: no dielectric breakdown or flashover at 4.3 x V_R (d.c.)/1 min
 Capacitance change |ΔC/C|: ≤ 10%
 Insulation resistance: ≥ 50% of initial limit.

APPROVALS

| | | | |
|--|---------------------------------|--------------------------------------|--------------------------|
| | ENEC IEC 60384-14 | Class X2 | File No.CA08.00063 |
| | CSA E 384-14-95 | Across-the-line | File No.154612 (LR83890) |
| | UL 1414 up to 1µF, 85°C; 250Vac | Across-the-line | File No.E97797 |
| | UL 1283 (310 Vac) | Electromagnetic Interference Filters | File No.E85238 |

Approved according to IEC 60384-14 (ex-former EN 132400)
 According to IEC 60065
 (**) ENEC mark has replaced all the following European National marks:



X2 CLASS (IEC 60384-14) - MKP
METALLIZED POLYPROPYLENE FILM CAPACITOR
SELF-HEALING PROPERTIES

Typical applications: interference suppression and «across-the-line» applications. Suitable for use in situations where failure of the capacitor would not lead to danger of electric shock.

PRODUCT CODE: R46

NEW 125°C

| Rated Cap. | 275 Vac / 560 Vdc Std dimensions | | | | Ø d | Max dv/dt at 390Vdc (V/µs) | Part Number |
|------------|----------------------------------|------|------|------|-----|----------------------------|----------------------|
| | B | H | L | p | | | |
| 0.010 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 K F 2100 -- H1 - |
| 0.015 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 K F 2150 -- H1 - |
| 0.022 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 K F 2220 -- H1 - |
| 0.033 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 K F 2330 -- H1 - |
| 0.047 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 K F 2470 -- H1 - |
| 0.068 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 K F 2680 -- H1 M |
| 0.010 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 2100 -- H1 - |
| 0.015 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 2150 -- H1 - |
| 0.022 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 2220 -- H1 - |
| 0.033 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 2330 -- H1 - |
| 0.047 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 2470 -- H1 - |
| 0.068 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 2680 -- H1 - |
| 0.10 µF | 6.0 | 12.0 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 3100 -- H1 - |
| 0.15 µF | 6.0 | 17.5 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 3150 -- H2 - |
| 0.15 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 3150 -- H3 - |
| 0.15 µF | 7.5 | 13.5 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 3150 -- H1 - |
| 0.22 µF | 8.5 | 14.5 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 3220 -- H1 - |
| 0.22 µF | 6.0 | 17.5 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 3220 -- H2 M |
| 0.22 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 K I 3220 -- H3 M |
| 0.22 µF | 7.5 | 18.5 | 18.0 | 15.0 | 0.8 | 400 | R46 K I 3220 -- H4 - |
| 0.33 µF | 10.0 | 16.0 | 18.0 | 15.0 | 0.8 | 400 | R46 K I 3330 -- H1 M |
| 0.33 µF | 7.5 | 18.5 | 18.0 | 15.0 | 0.8 | 400 | R46 K I 3330 -- H2 M |
| 0.33 µF | 13.0 | 12.0 | 18.0 | 15.0 | 0.8 | 400 | R46 K I 3330 -- H3 M |
| 0.47 µF | 11.0 | 19.0 | 18.0 | 15.0 | 0.8 | 400 | R46 K I 3470 -- H1 M |
| 0.15 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 K N 3150 -- H1 - |
| 0.22 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 K N 3220 -- H1 - |
| 0.33 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R46 K N 3330 -- H1 - |
| 0.47 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46 K N 3470 -- H1 - |
| 0.68 µF | 11.0 | 20.0 | 26.5 | 22.5 | 0.8 | 200 | R46 K N 3680 -- H1 - |
| 1.0 µF | 13.0 | 22.0 | 26.5 | 22.5 | 0.8 | 200 | R46 K N 4100 -- H1 - |


Rated voltage (K=275Vac) _____
 Mechanical version and packaging (Table 1) _____
 Tolerance: K (±10%); M (±20%) _____

E12 Series available upon request

All dimensions are in mm

For "capacitor connected in serial with main line" (two - phase and three - phase net) application, please read the "SHORT GUIDE TO CHOOSE THE RIGHT FILM CAPACITORS" at pag. 152 and contact our Technical Service for choosing the safest solution.

X2 CLASS (IEC 60384-14) - MKP Series
METALLIZED POLYPROPYLENE FILM CAPACITOR
 SELF-HEALING PROPERTIES

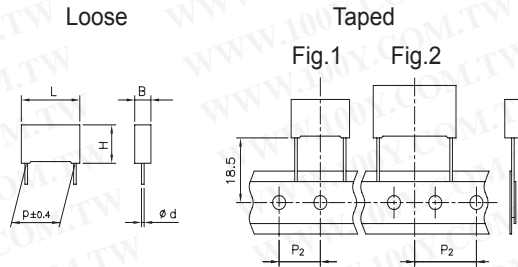

| | | | |
|-----------|-------------|-----------------|----------|
| Ø d ±0.05 | p ≤ 15 | 22.5 ≤ p ≤ 27.5 | p = 37.5 |
| | 0.6 or 0.8* | 0.8 | 1.0 |

*See size table.
 All dimensions are in mm.

Typical applications: This special R46 release is specifically designed for applications with particular protection against severe ambient conditions.

PRODUCT CODE: **R46**

| Pitch (mm) | Box thickness (B) (mm) | Maximum dimensions (mm) | | |
|------------|------------------------|-------------------------|--------|--------|
| | | B max | H max | L max |
| 10.0 | All | B +0.2 | H +0.1 | L +0.2 |
| 15.0 | <7.5 | B +0.2 | H +0.1 | L +0.3 |
| 15.0 | ≥7.5 | B +0.2 | H +0.1 | L +0.5 |
| 22.5 | All | B +0.2 | H +0.1 | L +0.3 |
| 27.5 | All | B +0.2 | H +0.1 | L +0.3 |
| 37.5 | All | B +0.3 | H +0.1 | L +0.3 |

GENERAL TECHNICAL DATA

- Dielectric:** polypropylene film.
- Plates:** metal layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire.
- Protection:** plastic case, thermosetting resin filled.
 Box material is solvent resistant and flame retardant according to UL94 V0.
- Marking:** Manufacturer's logo, series, capacitance, tolerance, rated voltage, capacitor class, dielectric code, climatic category, passive flammability category, manufacturing date code, approvals, manufacturing plant.
- Climatic category:** 40/110/56 IEC 60068-1
- Operating temperature range:** -40 to +110°C
- Related documents:** IEC 60384-14, EN 60384-14.

ELECTRICAL CHARACTERISTICS

Rated voltage (V_R): 275Vac (50/60Hz) / 560 Vdc

- Capacitance range:** 0.022µF to 10µF
- Capacitance values:** E6 series (IEC 60063 Norm).
- Capacitance tolerances** (measured at 1 kHz):
 ±10% (K); ±20% (M).
 tolerance ±5% (J) available upon request

Dissipation factor (DF):
 tgδ 10⁻⁴ at +25°C ±5°C: ≤15 (8)* at 1kHz
 * Typical value

Insulation resistance:

Test conditions
 Temperature: +25°C±5°C
 Voltage charge time: 1 min
 Voltage charge: 100 Vdc

Performance
 ≥1x10⁵ MΩ (5x10⁵ MΩ)* for C≤0.33µF
 ≥30000 s (150000 s)* for C>0.33µF
 * Typical value

Test voltage between terminations (on all pieces):
 1500Vac for 1 s + 2200Vdc for 1 s at +25°C±5°C

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions 1st

Temperature: +40°C ± 2°C
 Relative humidity (RH): 93% ±2%
 Test duration: 56 days

Test conditions 2nd

Temperature: +60°C ± 2°C
 Relative humidity (RH): 95% ±2%
 Test duration: 500 hours

Test conditions 3rd

Temperature: +40°C ± 2°C
 Relative humidity (RH): 93% ±2%
 Test duration: 500 hours
 Voltage value: 230 Vac, 50 Hz

Performance

Dielectric strength: no dielectric breakdown or flashover at 4.3 x V_R (d.c.)/1 min
 Capacitance change |ΔC/C|: ≤5%
 Insulation resistance: ≥50% of initial limit.

Endurance:

Test conditions

Temperature: +110°C ± 2°C
 Test duration: 1000 h
 Voltage applied: 1.25 x V_R +1000Vac 0.1 s/h

Performance

Dielectric strength: no dielectric breakdown or flashover at 4.3 x V_R (d.c.)/1 min
 Capacitance change |ΔC/C|: ≤10%
 Insulation resistance: ≥50% of initial limit.

Resistance to soldering heat:

Test conditions

Solder bath temperature: +260°C ± 5°C
 Dipping time (with heat screen): 10 s ± 1 s

Performance

Capacitance change |ΔC/C|: ≤2%

X2 CLASS (IEC60384-14) - MKP Series
METALLIZED POLYPROPYLENE FILM CAPACITOR
 SELF-HEALING PROPERTIES

APPROVALS

| Rated Cap. (*) | 275 Vac / 560 Vdc Std dimensions | | | | Ø d | Max dv/dt at 390Vdc (V/µs) | Part Number | | |
|-------------------|-------------------------------------|------|------|------|-----|-------------------------------------|-------------|------------|---|
| | B | H | L | p | | | | | |
| 0.022 µF | 4.0 | 9.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2220 -- S0 | - |
| 0.033 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2330 -- S0 | - |
| 0.047 µF | 5.0 | 11.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2470 -- S0 | - |
| 0.068 µF | 6.0 | 12.0 | 13.0 | 10.0 | 0.6 | 500 | R46 KF | 2680 -- S0 | - |
| 0.068 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 2680 -- S0 | - |
| 0.10 µF | 5.0 | 11.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3100 -- S1 | M |
| 0.10 µF | 6.0 | 12.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3100 -- S0 | - |
| 0.15 µF | 6.0 | 12.0 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3150 -- S1 | M |
| 0.15 µF | 7.5 | 13.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3150 -- S0 | - |
| 0.22 µF | 7.5 | 13.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3220 -- S1 | M |
| 0.22 µF | 8.5 | 14.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3220 -- S0 | - |
| 0.22 µF | 6.0 | 17.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3220 -- S2 | - |
| 0.22 µF | 9.0 | 12.5 | 18.0 | 15.0 | 0.6 | 400 | R46 KI | 3220 -- S3 | - |
| 0.33 µF | 13.0 | 12.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3330 -- S1 | - |
| 0.33 µF | 10.0 | 16.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3330 -- S0 | - |
| 0.33 µF | 7.5 | 18.5 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3330 -- S2 | - |
| 0.47 µF | 11.0 | 19.0 | 18.0 | 15.0 | 0.8 | 400 | R46 KI | 3470 -- S0 | - |
| 0.22 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3220 -- S0 | - |
| 0.33 µF | 6.0 | 15.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3330 -- S1 | M |
| 0.33 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3330 -- S0 | - |
| 0.47 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3470 -- S1 | M |
| 0.47 µF | 8.5 | 17.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3470 -- S0 | - |
| 0.68 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 3680 -- S0 | - |
| 1.0 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4100 -- S2 | M |
| 1.0 µF | 11.0 | 20.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4100 -- S1 | - |
| 1.0 µF | 13.0 | 22.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4100 -- S0 | - |
| 1.2 µF | 13.0 | 22.0 | 26.5 | 22.5 | 0.8 | 200 | R46 KN | 4120 -- S0 | - |
| 0.47 µF | 9.0 | 17.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 3470 -- S0 | - |
| 0.68 µF | 9.0 | 17.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 3680 -- S1 | - |
| 1.0 µF | 11.0 | 20.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4100 -- S1 | - |
| 1.5 µF | 13.0 | 22.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4150 -- S1 | - |
| 2.2 µF | 13.0 | 25.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4220 -- S2 | - |
| 3.3 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4330 -- S2 | - |
| 4.7 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46 KR | 4470 -- S2 | - |
| 1.5 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4150 -- S1 | - |
| 2.2 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4220 -- S2 | M |
| 2.2 µF | 13.0 | 24.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4220 -- S1 | - |
| 3.3 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4330 -- S1 | - |
| 4.7 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4470 -- S2 | M |
| 4.7 µF | 19.0 | 32.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4470 -- S1 | - |
| 6.8 µF | 20.0 | 40.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 4680 -- S2 | - |
| 10.0 µF | 30.0 | 45.0 | 41.5 | 37.5 | 1.0 | 100 | R46 KW | 5100 -- S1 | - |

Rated voltage (K=275Vac)
 Mechanical version and packaging (Table 1)
 Tolerance: K (±10%); M (±20%)

E12 Series available upon request
 All dimensions are in mm

| | | | |
|--|---------------------------------------|--|-------------------------------------|
| | ENEC IEC 60384-14 | Class X2 | File No.V4413 |
| | CSA E 384-14-95 (up to 5.6 µF) | Across-the-line | File No.154612 (LR 83890) |
| | UL 1414 up to 1µF, 85°C; 250Vac | Across-the-line | File No.E97797 |
| | UL 1283 (310 Vac) | Electromagnetic Interference Filters | File No.E85238 |
| | GB/T 14472 | Class X2 | File CQC3001008199 CQC3001008842 |

Approved according to IEC 60384-14 (ex-former EN 132400)
 According to IEC 60065


(**) ENEC mark has replaced all the following European
 National marks:



Table 1

| Standard packaging style | Lead length (mm) | Taping style | | | Ordering code (Digit 10 to 11) |
|------------------------------------|------------------------|------------------------|---------------|---------------|--------------------------------------|
| | | P ₂ (mm) | Fig. (No.) | Pitch (mm) | |
| AMMO-PACK | | 12.70 | 1 | 10.0/15.0 | DQ |
| AMMO-PACK | | 19.05 | 2 | 22.5 | DQ |
| REEL Ø500mm | | 12.70 | 1 | 10.0/15.0 | CK |
| REEL Ø500mm | | 19.05 | 2 | 22.5/27.5 | CK |
| Loose, short leads | 4 ⁺² | | | | 00 |
| Loose, long leads | 25 ^{-1/2} | | | | 50 |
| Loose, long leads | 30 ⁺⁵ | | | | 40 |
| Loose, insulated rigid leads | 30 ⁺⁵ | | | | 51 |
| Loose, insulated flexible leads | 150 ^{±5} | | | | 52 |

Note: Ammo-pack is the preferred packaging for taped version.

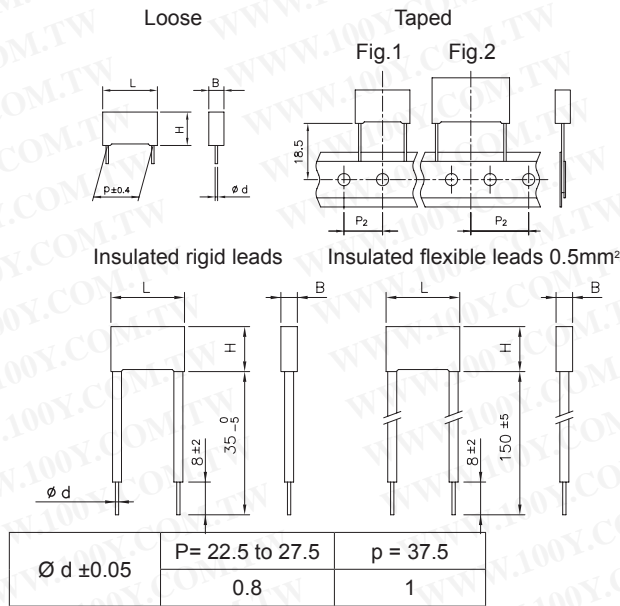

All dimensions are in mm.

GENERAL TECHNICAL DATA

- Dielectric:** polypropylene film.
- Plates:** metal layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire.
- Protection:** plastic case, thermosetting resin filled. Box material is solvent resistant and flame retardant according to UL94 V0.
- Marking:** Manufacturer's logo, series, capacitance, tolerance, rated voltage, capacitor class, dielectric code, climatic category, passive flammability category, manufacturing date code, approvals, manufacturing plant.

Climatic category: 40/110/56 IEC 60068-1
Operating temperature range: -40 to +110°C
Related documents: IEC 60384-14, EN 60384-14.

ELECTRICAL CHARACTERISTICS

Rated voltage (V_R): 275Vac (50/60Hz) / 560 Vdc
 300Vac (50/60Hz) / 630 Vdc

Capacitance range: 0.22µF to 10µF
Capacitance values: E6 series (IEC 60063 Norm).
Capacitance tolerances (measured at 1 kHz): ±10% (K); ±20% (M).

Dissipation factor (DF): tgδ 10⁻⁴ at +25°C ±5°C: ≤10 (6)* at 1kHz
 * Typical value

Insulation resistance:
Test conditions
 Temperature: +25°C±5°C
 Voltage charge time: 1 min
 Voltage charge: 100 Vdc

Performance
 ≥1x10⁵ MΩ (5x10⁵ MΩ)* for C≤0.33µF
 ≥30000 s (150000 s)* for C>0.33µF
 * Typical value

Test voltage between terminations (on all pieces):
 1500Vac for 1 s + 2200Vdc for 1 s at +25°C±5°C

Capacitors with discharge resistor
X2 CLASS (IEC 60384-14) - MKP Series METALLIZED POLYPROPYLENE FILM CAPACITOR SELF-HEALING PROPERTIES

Typical applications: interference suppression and «across-the-line» applications. Suitable for use in situations where failure of the capacitor would not lead to danger of electric shock.

PRODUCT CODE: R46

| Pitch (mm) | Box thickness (B) (mm) | Maximum dimensions (mm) | | |
|------------|------------------------|-------------------------|--------|--------|
| | | B max | H max | L max |
| 22.5 | All | B +0.2 | H +0.1 | L +0.3 |
| 27.5 | All | B +0.2 | H +0.1 | L +0.3 |
| 37.5 | All | B +0.3 | H +0.1 | L +0.3 |

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions 1st

Temperature: +40°C ± 2°C
 Relative humidity (RH): 93% ±2%
 Test duration: 56 days

Performance

Dielectric strength: no dielectric breakdown or flashover at 4.3 x V_R (d.c.)/1 min
 Capacitance change |ΔC/C|: ≤5%
 Insulation resistance: ≥50% of initial limit.

Endurance:

Test conditions

Temperature: +110°C ± 2°C
 Test duration: 1000 h
 Voltage applied: 1.25 x V_R +1000Vac 0.1 s/h

Performance

Dielectric strength: no dielectric breakdown or flashover at 4.3 x V_R (d.c.)/1 min
 Capacitance change |ΔC/C|: ≤10%
 Insulation resistance: ≥50% of initial limit.

Resistance to soldering heat:

Test conditions

Solder bath temperature: +260°C ± 5°C
 Dipping time (with heat screen): 10 s ± 1 s

Performance

Capacitance change |ΔC/C|: ≤2%

APPROVALS

| | | | |
|--|----------------------------------|--------------------------------------|----------------|
| | ENEC IEC 60384-14 | Class X2 | File No.V4413 |
| | UL 1414 up to 1µF, 85°C; 250Vac) | Across-the-line | File No.E97797 |
| | UL 1283 (250 Vac-105°C) | Electromagnetic Interference Filters | File No.E85238 |

Approved according to IEC 60384-14 (ex-former EN 132400)
 According to IEC 60065.

Capacitors with discharge resistor
X2 CLASS (IEC 60384-14) - MKP Series
METALLIZED POLYPROPYLENE FILM CAPACITOR
SELF-HEALING PROPERTIES

PRODUCT CODE: R46

| Rated Cap. (*) | 275 Vac / 560 Vdc Std dimensions | | | | Ø d | Max dv/dt at 390Vdc (V/µs) | Part Number |
|----------------|-------------------------------------|------|------|------|-----|----------------------------|---------------------|
| | B | H | L | p | | | |
| 0.22 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R46KN 3220 -- 01 -- |
| 0.33 µF | 8.5 | 17.0 | 26.5 | 22.5 | 0.8 | 200 | R46KN 3330 -- 01 -- |
| 0.47 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R46KN 3470 -- 01 -- |
| 0.68 µF | 11.0 | 20.0 | 26.5 | 22.5 | 0.8 | 200 | R46KN 3680 -- 01 -- |
| 0.47 µF | 11.0 | 20.0 | 32.0 | 27.5 | 0.8 | 150 | R46KR 3470 -- 01 -- |
| 0.68 µF | 11.0 | 20.0 | 32.0 | 27.5 | 0.8 | 150 | R46KR 3680 -- M1 -- |
| 1.0 µF | 13.0 | 22.0 | 32.0 | 27.5 | 0.8 | 150 | R46KR 4100 -- M1 -- |
| 1.5 µF | 13.0 | 22.0 | 32.0 | 27.5 | 0.8 | 150 | R46KR 4150 -- M1 -- |
| 2.2 µF | 14.0 | 28.0 | 32.0 | 27.5 | 0.8 | 150 | R46KR 4220 -- M1 -- |
| 3.3 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R46KR 4330 -- M2 -- |
| 4.7 µF | 22.0 | 37.0 | 32.0 | 27.5 | 0.8 | 150 | R46KR 4470 -- M1 -- |
| 1.5 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R46KW 4150 -- M1 -- |
| 2.2 µF | 13.0 | 24.0 | 41.5 | 37.5 | 1.0 | 100 | R46KW 4220 -- M1 -- |
| 3.3 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R46KW 4330 -- M1 -- |
| 4.7 µF | 19.0 | 32.0 | 41.5 | 37.5 | 1.0 | 100 | R46KW 4470 -- M1 -- |
| 6.8 µF | 20.0 | 40.0 | 41.5 | 37.5 | 1.0 | 100 | R46KW 4680 -- M2 -- |
| 10.0 µF | 24.0 | 44.0 | 41.5 | 37.5 | 1.0 | 100 | R46KW 5100 -- M1 -- |

Rated voltage (K=275Vac) _____
 Mechanical version and packaging (Table 1) _____
 Tolerance: K (±10%); M (±20%) _____
 Value of discharge resistor (Table 2) _____

| Rated Cap. (*) | 300 Vac / 630 Vdc Std dimensions | | | | Ø d | Max dv/dt at 390Vdc (V/µs) | Part Number |
|----------------|-------------------------------------|------|------|------|-----|----------------------------|---------------------|
| | B | H | L | p | | | |
| 0.22 µF | 7.0 | 16.0 | 26.5 | 22.5 | 0.8 | 200 | R463N 3220 -- 01 -- |
| 0.33 µF | 8.5 | 17.0 | 26.5 | 22.5 | 0.8 | 200 | R463N 3330 -- 01 -- |
| 0.47 µF | 10.0 | 18.5 | 26.5 | 22.5 | 0.8 | 200 | R463N 3470 -- 01 -- |
| 0.68 µF | 11.0 | 20.0 | 26.5 | 22.5 | 0.8 | 200 | R463N 3680 -- 01 -- |
| 0.47 µF | 11.0 | 20.0 | 32.0 | 27.5 | 0.8 | 150 | R463R 3470 -- 01 -- |
| 0.68 µF | 11.0 | 20.0 | 32.0 | 27.5 | 0.8 | 150 | R463R 3680 -- M1 -- |
| 1.0 µF | 13.0 | 22.0 | 32.0 | 27.5 | 0.8 | 150 | R463R 4100 -- M1 -- |
| 1.5 µF | 13.0 | 22.0 | 32.0 | 27.5 | 0.8 | 150 | R463R 4150 -- M1 -- |
| 2.2 µF | 14.0 | 28.0 | 32.0 | 27.5 | 0.8 | 150 | R463R 4220 -- M1 -- |
| 3.3 µF | 18.0 | 33.0 | 32.0 | 27.5 | 0.8 | 150 | R463R 4330 -- M2 -- |
| 4.7 µF | 22.0 | 37.0 | 32.0 | 27.5 | 0.8 | 150 | R463R 4470 -- M1 -- |
| 1.5 µF | 11.0 | 22.0 | 41.5 | 37.5 | 1.0 | 100 | R463W 4150 -- M1 -- |
| 2.2 µF | 13.0 | 24.0 | 41.5 | 37.5 | 1.0 | 100 | R463W 4220 -- M1 -- |
| 3.3 µF | 16.0 | 28.5 | 41.5 | 37.5 | 1.0 | 100 | R463W 4330 -- M1 -- |
| 4.7 µF | 19.0 | 32.0 | 41.5 | 37.5 | 1.0 | 100 | R463W 4470 -- M1 -- |
| 6.8 µF | 20.0 | 40.0 | 41.5 | 37.5 | 1.0 | 100 | R463W 4680 -- M2 -- |
| 10.0 µF | 24.0 | 44.0 | 41.5 | 37.5 | 1.0 | 100 | R463W 5100 -- M1 -- |

Rated voltage (3=300Vac) _____
 Mechanical version and packaging (Table 1) _____
 Tolerance: K (±10%); M (±20%) _____
 Value of discharge resistor (Table 2) _____

Table 1

| Standard packaging style | Lead length (mm) | Taping style | | | Ordering code (Digit 10 to 11) |
|---------------------------------|--------------------|---------------------|------------|------------|--------------------------------|
| | | P ₂ (mm) | Fig. (No.) | Pitch (mm) | |
| REEL Ø500mm | | 19.05 | 2 | 22.5/27.5 | CK |
| Loose, short leads | 4 ⁺² | | | | 00 |
| Loose, long leads | 25 ^{-1/2} | | | | 50 |
| Loose, long leads | 30 ⁺⁵ | | | | 40 |
| Loose, insulated rigid leads | 30 ⁺⁵ | | | | 51 |
| Loose, insulated flexible leads | 150 ⁺⁵ | | | | 52 |

PRODUCT CODE SYSTEM

The part number, comprising 15 digits, is formed as follows:

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| R | 4 | 6 | | | | | | | | | | - | | - |

- Digit 1 to 3 Series code.
- Digit 4 a.c. rated voltage:
K = 275Vac; 3 = 300Vac
- Digit 5 Pitch:
N = 22.5; R = 27.5; W = 37.5 mm
- Digit 6 to 9 Digits 7 - 8 - 9 indicate the first three digits of Capacitance value and the 6th digit indicates the number of zeros that must be added to obtain the Rated Capacitance in pF.
- Digit 10 to 11 Mechanical version and/or packaging (table 1)
- Digit 12 Identifies the dimensions and electrical characteristics.
- Digit 13 Internal use
- Digit 14 Capacitance tolerance:
K=±10%; M=±20%
- Digit 15 Value of the discharge resistor (tolerance±10%) according to the following table*:

Table 2

| R | code (-) |
|--------|----------|
| 470 kΩ | E |
| 680 kΩ | F |
| 1 MΩ | G |
| 1.2 MΩ | L |
| 1.5 MΩ | N |
| 2.2 MΩ | P |
| 3.3 MΩ | Q |
| 4.7 MΩ | S |
| 6.8 MΩ | T |
| 10 MΩ | V |

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

*Other resistors are available upon request.

All dimensions are in mm