

Aluminium electrolytic capacitors Power Economic Screw Terminals

154/155 PEC-ST

FEATURES

- Polarized aluminium electrolytic capacitors, non-solid
- Large types, minimized dimensions, cylindrical aluminium case, insulated with a blue sleeve
- Also available in bolt version (PEC-STB)
- Pressure relief in the sealing
- Charge and discharge proof
- Long useful life: 12000 hours at 85 °C
- High ripple current capability
- High resistance to shock and vibration achieved by longitudinal rills and special internal construction.


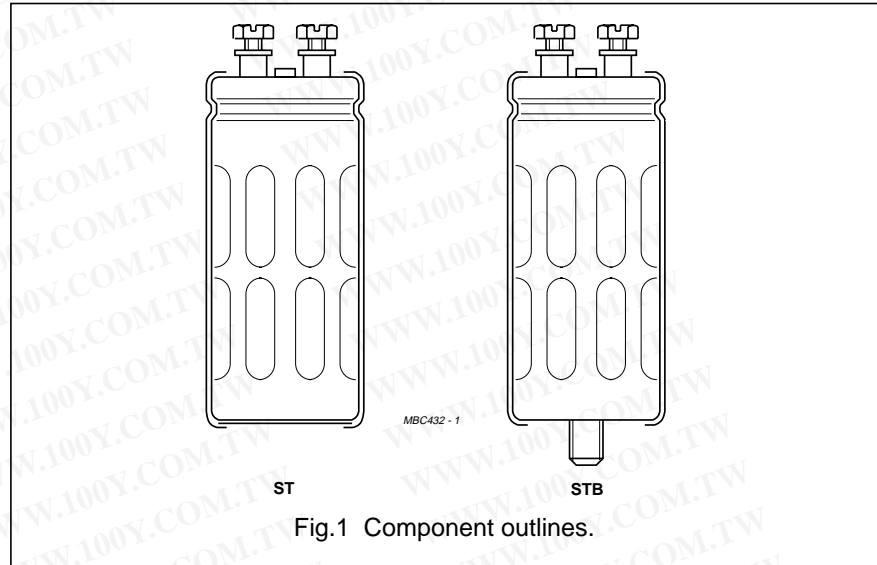


Fig.1 Component outlines.

APPLICATIONS

- General purpose, computer and industrial systems
- Smoothing and filtering
- Standard and switched mode power supplies
- Energy storage in pulse systems.

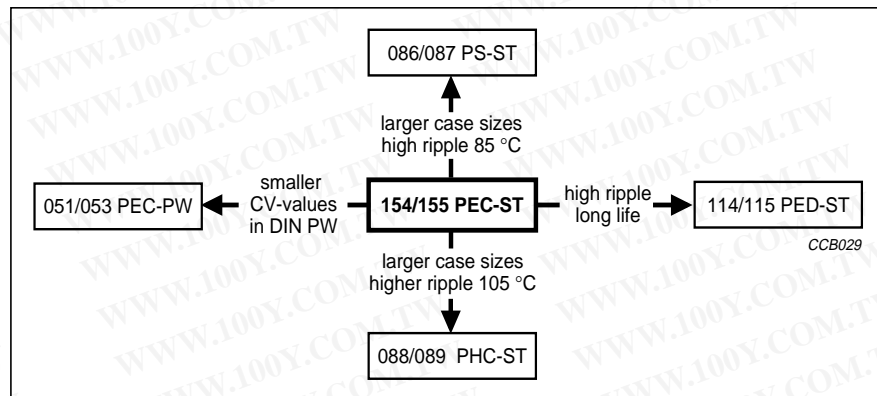

QUICK REFERENCE DATA

DESCRIPTION	VALUE	
	154	155
Case size ($\varnothing D_{nom} \times L_{nom}$ in mm)	35 × 60 to 75 × 105	
Rated capacitance range (E6 series), C_R	220 to 470 000 μF	
Tolerance on C_R	±20%	
Rated voltage range, U_R	10 to 100 V	250 to 400 V
Category temperature range	-40 to +85 °C	
Endurance test at 85 °C	5000 hours (400 V: 2000 hours)	
Useful life at 85 °C	12000 hours (400 V: 5000 hours)	
Useful life at 40 °C, $1.4 \times I_R$ applied	200000 hours (400 V: 90000 hours)	
Shelf life at 0 V, 85 °C	500 hours	
Based on sectional specification	IEC 384-4/CECC 30300	
Climatic category IEC 68	40/085/56	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Aluminium electrolytic capacitors Power Economic Screw Terminals

154/155 PEC-ST

Selection chart for C_R , U_R and relevant nominal case sizes ($\varnothing D \times L$ in mm) for 154 series

Preferred types in **bold**.

C_R (μF)	U_R (V)					
	10	16	25	40	63	100
3300	–	–	–	–	–	35 × 60
4700	–	–	–	–	–	35 × 80
6800	–	–	–	–	35 × 60	35 × 105
10000	–	–	–	–	35 × 80	50 × 80
15000	–	–	–	35 × 60	35 × 105	50 × 105
22000	–	–	35 × 60	35 × 80	50 × 80	65 × 105
33000	–	35 × 60	35 × 80	50 × 80	50 × 105	75 × 105
47000	35 × 60	35 × 80	35 × 105	50 × 80	65 × 105	–
68000	35 × 80	35 × 105	50 × 80	50 × 105	75 × 105	–
100000	35 × 105	50 × 80	50 × 105	65 × 105	–	–
150000	50 × 80	50 × 105	65 × 105	75 × 105	–	–
220000	50 × 105	65 × 105	75 × 105	–	–	–
330000	65 × 105	75 × 105	–	–	–	–
470000	75 × 105	–	–	–	–	–

Selection chart for C_R , U_R and relevant nominal case sizes ($\varnothing D \times L$ in mm) for 155 series

Preferred types in **bold**.

C_R (μF)	U_R (V)			
	250	350	385	400
220	–	–	35 × 60	35 × 60
330	–	35 × 60	35 × 80	35 × 80
470	35 × 60	35 × 80	35 × 80	35 × 80
680	35 × 80	35 × 105	35 × 105	35 × 105
1000	35 × 105	50 × 80	50 × 80	50 × 80
1500	50 × 80	50 × 105	50 × 105	50 × 105
2200	50 × 105	65 × 105	65 × 105	65 × 105
3300	65 × 105	65 × 105	75 × 105	75 × 105
4700	65 × 105	–	–	–
6800	75 × 105	–	–	–

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Aluminium electrolytic capacitors
Power Economic Screw Terminals

154/155 PEC-ST

MECHANICAL DATA AND PACKAGING QUANTITIES

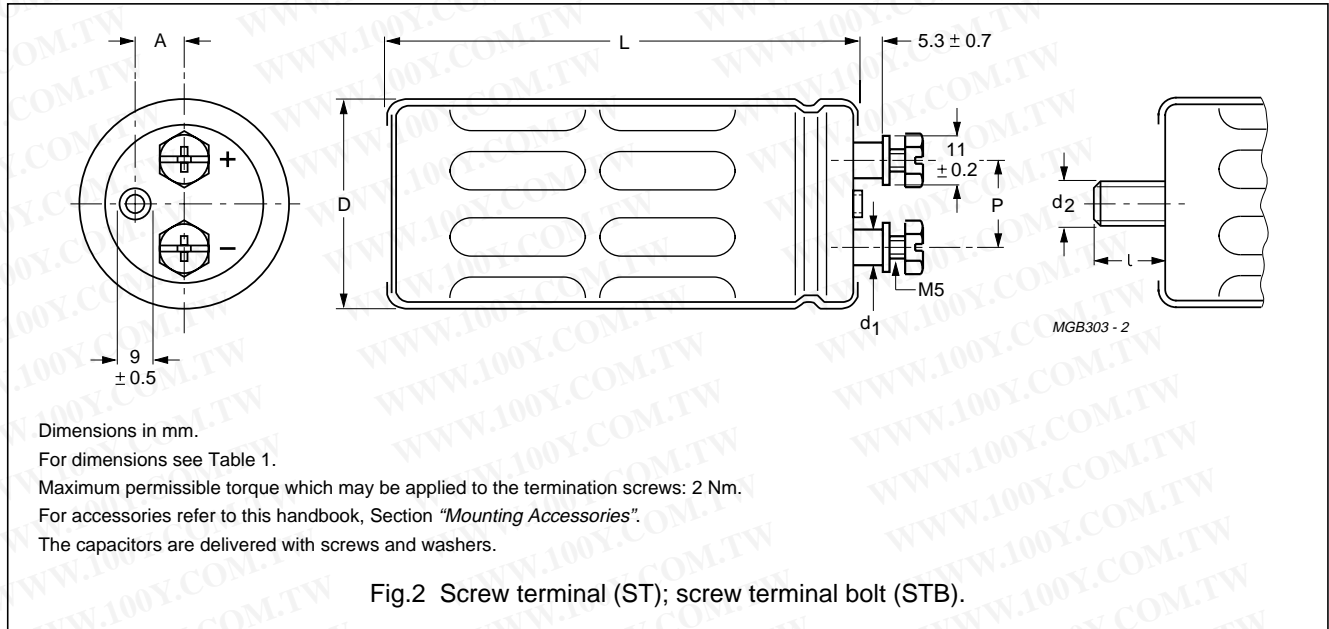


Table 1 Physical dimensions, mass and packaging information; see Fig.2

NOMINAL CASE SIZE ∅D × L (mm)	∅D _{max} (mm)	L _{max} (mm)	P ±0.1 (mm)	A (mm)	d ₁ ±0.2 (mm)	d ₂ × l	MASS (g)	PACKAGING QUANTITIES (per box)	CARDBOARD BOX DIMENSIONS l × w × h (mm)
35 × 60	36.5	63	13.0	8.4	8.0	M8 × 12	≈55	25	196 × 192 × 110
35 × 80	36.5	83	13.0	8.4	8.0	M8 × 12	≈80	25	196 × 192 × 115
35 × 105	36.5	108	13.0	8.4	8.0	M8 × 12	≈110	25	196 × 192 × 140
50 × 80	51.5	83	22.0	14.3	8.0	M12 × 16	≈160	25	293 × 273 × 115
50 × 105	51.5	108	22.0	14.3	8.0	M12 × 16	≈210	25	293 × 273 × 140
65 × 105	66.5	108	28.5	19.0	9.6	M12 × 16	≈370	10	368 × 151 × 140
75 × 105	76.5	108	32.0	21.0	9.6	M12 × 16	≈535	10	418 × 173 × 140

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in µF)
- Tolerance code on rated capacitance (M for ±20%)
- Rated voltage (in V)
- Climatic category in accordance with "IEC 68"
- Date code (year and week) in accordance with "IEC 62"
- Code for factory of origin
- Name of manufacturer
- Code number (last 8 digits)
- Code for basic specification in accordance with "IEC 384-4-1" and "CECC 30301".

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Aluminium electrolytic capacitors
 Power Economic Screw Terminals

154/155 PEC-ST

Ordering Example

Electrolytic capacitor 154 series

10000 µF/63 V; ±20%

Nominal case size: Ø35 × 80 mm; ST version

Catalogue number: 2222 154 18103.

ELECTRICAL DATA AND ORDERING INFORMATION

Unless otherwise specified, all electrical values in Tables 2 and 3 apply at $T_{amb} = 20\text{ °C}$, $P = 86$ to 106 kPa, $RH = 45$ to 75%.

SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz
I_R	rated RMS ripple current at 100 Hz, 85 °C and 20 kHz, 70 °C
I_{L1}	max. leakage current after 1 minute at U_R
I_{L5}	max. leakage current after 5 minutes at U_R
ESR	typical equivalent series resistance at 100 Hz
Z	impedance at 20 kHz
Tan δ	max. dissipation factor at 100 Hz

Table 2 Electrical data and ordering information for 154 series; preferred types in bold

U_R (V)	C_R 100 Hz (µF)	NOMINAL CASE SIZE ØD × L (mm)	I_R 100 Hz 85 °C (A)	I_R 20 kHz 70 °C (A)	I_{L1} 1 min (mA)	I_{L5} 5 min (mA)	ESR TYP. 100 Hz (mΩ)	Tan δ MAX. 100 Hz	Z TYP. 20 kHz (mΩ)	Z MAX. 20 kHz (mΩ)	CATALOGUE NUMBER (see Table 3, note 1) 2222
10	47000	35 × 60	8.4	15.9	2.82	0.94	14	0.48	11	16.5	154 14473
	68000	35 × 80	8.7	16.5	4.08	1.36	11	0.88	9	13.5	154 14683
	100000	35 × 105	10.7	20.3	6.00	2.00	10.5	0.92	8	12	154 14104
	150000	50 × 80	13.2	25.0	9.00	3.00	8	1.03	8	12	154 14154
	220000	50 × 105	16.5	31.4	13.20	4.40	6.5	1.26	7	10.5	154 14224
	330000	65 × 105	20.8	39.5	19.80	6.60	5.5	1.59	7	10.5	154 14334
16	470000	75 × 105	22.6	42.9	28.20	9.40	5.5	2.21	7	10.5	154 14474
	330000	35 × 60	8.4	15.9	3.17	1.06	14	0.32	10	15	154 15333
	47000	35 × 80	8.7	16.5	4.51	1.51	11	0.32	9	13.5	154 15473
	68000	35 × 105	12.2	23.2	6.53	2.18	8	0.45	8	12	154 15683
	100000	50 × 80	13.2	25.0	9.60	3.20	8	0.70	8	12	154 15104
	150000	50 × 105	14.9	28.3	14.40	4.80	8	0.88	7	10.5	154 15154
	220000	65 × 105	20.8	39.5	21.10	7.04	5.5	1.07	7	10.5	154 15224
	330000	75 × 105	22.6	42.9	31.70	10.60	5.5	1.58	7	10.5	154 15334

Aluminium electrolytic capacitors
 Power Economic Screw Terminals

154/155 PEC-ST

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 85 °C (A)	I _R 20 kHz 70 °C (A)	I _{L1} 1 min (mA)	I _{L5} 5 min (mA)	ESR TYP. 100 Hz (mΩ)	Tan δ MAX. 100 Hz	Z TYP. 20 kHz (mΩ)	Z MAX. 20 kHz (mΩ)	CATALOGUE NUMBER (see Table 3, note 1) 2222
25	22000	35 × 60	8.1	15.4	3.30	1.10	12	0.23	10	15	154 16223
	33000	35 × 80	9.6	18.2	4.95	1.65	10	0.28	9	13.5	154 16333
	47000	35 × 105	12.2	23.2	7.05	2.35	8	0.33	8	12	154 16473
	68000	50 × 80	13.2	25.0	10.20	3.40	8	0.49	8	12	154 16683
	100000	50 × 105	15.9	30.2	15.00	5.00	7	0.60	8	12	154 16104
	150000	65 × 105	19.7	37.4	22.50	7.50	7	0.93	8	12	154 16154
	220000	75 × 105	22.6	42.9	33.00	11.00	5.5	1.07	7	10.5	154 16224
	15000	35 × 60	7.7	14.6	3.60	1.20	13	0.17	10	15	154 17153
	22000	35 × 80	9.8	18.6	5.28	1.76	11	0.20	9	13.5	154 17223
	33000	50 × 80	11.8	22.4	7.92	2.64	10	0.29	9	13.5	154 17333
40	47000	50 × 80	11.8	22.4	11.30	3.76	10	0.42	9	13.5	154 17473
	68000	50 × 105	14.1	26.8	16.30	5.44	9	0.45	8	12	154 17683
	100000	65 × 105	17.3	32.9	24.00	8.00	9	0.80	8	12	154 17104
	150000	75 × 105	20.8	39.5	36.00	12.00	6.5	0.83	7	10.5	154 17154
	6800	35 × 60	6.6	12.5	2.57	0.86	17	0.10	13	19	154 18682
	10000	35 × 80	8.6	16.3	3.78	1.26	12.5	0.11	10	15	154 18103
	15000	35 × 105	10.9	20.7	5.67	1.89	10	0.13	9	13.5	154 18153
	22000	50 × 80	11.8	22.4	8.32	2.77	10	0.20	9	13.5	154 18223
	33000	50 × 105	14.1	26.8	12.50	4.16	9	0.24	8	12	154 18333
	47000	65 × 105	17.3	32.9	17.80	5.92	9	0.36	8	12	154 18473
63	68000	75 × 105	17.7	33.6	25.70	8.57	9	0.58	8	12	154 18683
	3300	35 × 60	3.8	7.2	1.98	0.66	50	0.13	35	55	154 19332
	4700	35 × 80	5.3	10.0	2.82	0.94	35	0.13	25	40	154 19472
	6800	35 × 105	7.1	13.5	4.08	1.36	25	0.14	18	28	154 19682
	10000	50 × 80	8.9	16.9	6.00	2.00	18	0.14	13	20	154 19103
	15000	50 × 105	11.5	21.8	9.00	3.00	14	0.16	10	16	154 19153
	22000	65 × 105	18.2	34.5	13.20	4.40	7.5	0.13	6	9	154 19223
	33000	75 × 105	24.1	45.7	19.80	6.60	5.0	0.13	4	6	154 19333

Aluminium electrolytic capacitors
 Power Economic Screw Terminals

154/155 PEC-ST

Table 3 Electrical data and ordering information for 155 series; preferred types in bold

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ∅D × L (mm)	I _R 100 Hz 85 °C (A)	I _R 20 kHz 70 °C (A)	I _{L1} 1 min (mA)	I _{L5} 5 min (mA)	ESR TYP. 100 Hz (mΩ)	Tan δ MAX. 100 Hz	Z TYP. 20 kHz (mΩ)	Z MAX. 20 kHz (mΩ)	CATALOGUE NUMBER (note 1) 2222
250	470	35 × 60	1.6	3.0	0.70	0.24	360	0.16	300	450	155 13471
	680	35 × 80	2.2	4.2	1.02	0.34	250	0.16	216	325	155 13681
	1000	35 × 105	2.9	5.5	1.50	0.50	175	0.16	140	210	155 13102
	1500	50 × 80	3.9	7.4	2.25	0.75	115	0.16	100	150	155 13152
	2200	50 × 105	5.3	10.1	3.30	1.10	80	0.17	70	105	155 13222
	3300	65 × 105	7.7	14.6	4.95	1.65	50	0.17	43	65	155 13332
	4700	65 × 105	8.2	15.6	7.05	2.35	44	0.19	40	60	155 13472
	6800	75 × 105	10	19	10.20	3.40	35	0.22	33	50	155 13682
350	330	35 × 60	1.5	2.9	0.69	0.23	370	0.12	313	470	155 15331
	470	35 × 80	2.1	4.0	0.99	0.33	260	0.12	223	335	155 15471
	680	35 × 105	2.9	5.5	1.43	0.48	180	0.12	146	220	155 15681
	1000	50 × 80	3.7	7.0	2.10	0.70	125	0.12	113	170	155 15102
	1500	50 × 105	4.3	8.2	3.15	1.05	120	0.18	106	160	155 15152
	2200	65 × 105	6.5	12.6	4.62	1.54	70	0.18	63	95	155 15222
	3300	65 × 105	7.1	13.5	6.93	2.31	60	0.19	63	95	155 15332
	220	35 × 60	1.0	2.0	0.51	0.17	650	0.15	475	955	155 18221
385	330	35 × 80	1.5	2.9	0.76	0.25	430	0.15	326	635	155 18331
	470	35 × 80	1.8	3.4	1.08	0.36	300	0.15	220	445	155 18471
	680	35 × 105	2.4	4.6	1.57	0.52	210	0.15	150	310	155 18681
	1000	50 × 80	3.4	6.5	2.31	0.77	125	0.15	90	210	155 18102
	1500	50 × 105	4.7	8.9	3.46	1.15	85	0.15	60	140	155 18152
	2200	65 × 105	6.5	12.4	5.08	1.69	58	0.15	40	95	155 18222
	3300	75 × 105	7.6	14.5	7.62	2.54	50	0.15	35	70	155 18332

Aluminium electrolytic capacitors
 Power Economic Screw Terminals

154/155 PEC-ST

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ∅D × L (mm)	I _R 100 Hz 85 °C (A)	I _R 20 kHz 70 °C (A)	I _{L1} 1 min (mA)	I _{L5} 5 min (mA)	ESR TYP. 100 Hz (mΩ)	Tan δ MAX. 100 Hz	Z TYP. 20 kHz (mΩ)	Z MAX. 20 kHz (mΩ)	CATALOGUE NUMBER (note 1) 2222
400	220	35 × 60	1.0	2.0	0.53	0.18	650	0.15	475	955	155 16221
	330	35 × 80	1.5	2.9	0.79	0.27	430	0.15	320	635	155 16331
	470	35 × 80	1.8	3.4	1.13	0.38	300	0.15	220	445	155 16471
	680	35 × 105	2.4	4.6	1.63	0.54	210	0.15	150	310	155 16681
	1000	50 × 80	3.4	6.5	2.40	0.80	125	0.15	90	210	155 16102
	1500	50 × 105	4.7	8.9	3.60	1.20	85	0.15	60	140	155 16152
	2200	65 × 105	6.5	12.4	5.28	1.76	58	0.15	40	95	155 16222
	3300	75 × 105	7.6	14.5	7.92	2.64	50	0.15	35	70	155 16332

Note

1. Catalogue number applies to the ST version; for STB version (not preferred) replace 8th digit by '5' (2222 154/155 5....).

Additional electrical data

PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage for short periods	≤250 V versions	$U_s = 1.15 \times U_R$
	≥350 V versions	$U_s = 1.1 \times U_R$
Reverse voltage		$U_{rev} \leq 1 V$
Current		
Leakage current	after 1 minute at U _R	$I_{L1} \leq 0.006C_R \times U_R + 4 \mu A$
	after 5 minutes at U _R	$I_{L5} \leq 0.002C_R \times U_R + 4 \mu A$
Inductance		
Equivalent series inductance (ESL)	case ∅D = 35 mm	typ. 18 nH
	case ∅D = 50 mm	typ. 25 nH
	case ∅D = 65 mm	typ. 27 nH
	case ∅D = 75 mm	typ. 29 nH

Aluminium electrolytic capacitors
Power Economic Screw Terminals

154/155 PEC-ST

RIPPLE CURRENT AND USEFUL LIFE

Table 4 Multiplier of ripple current (I_R) as a function of frequency

FREQUENCY (Hz)	I_R MULTIPLIER
50	0.83
100	1.00
200	1.10
400	1.15
1000	1.19
≥ 2000	1.20

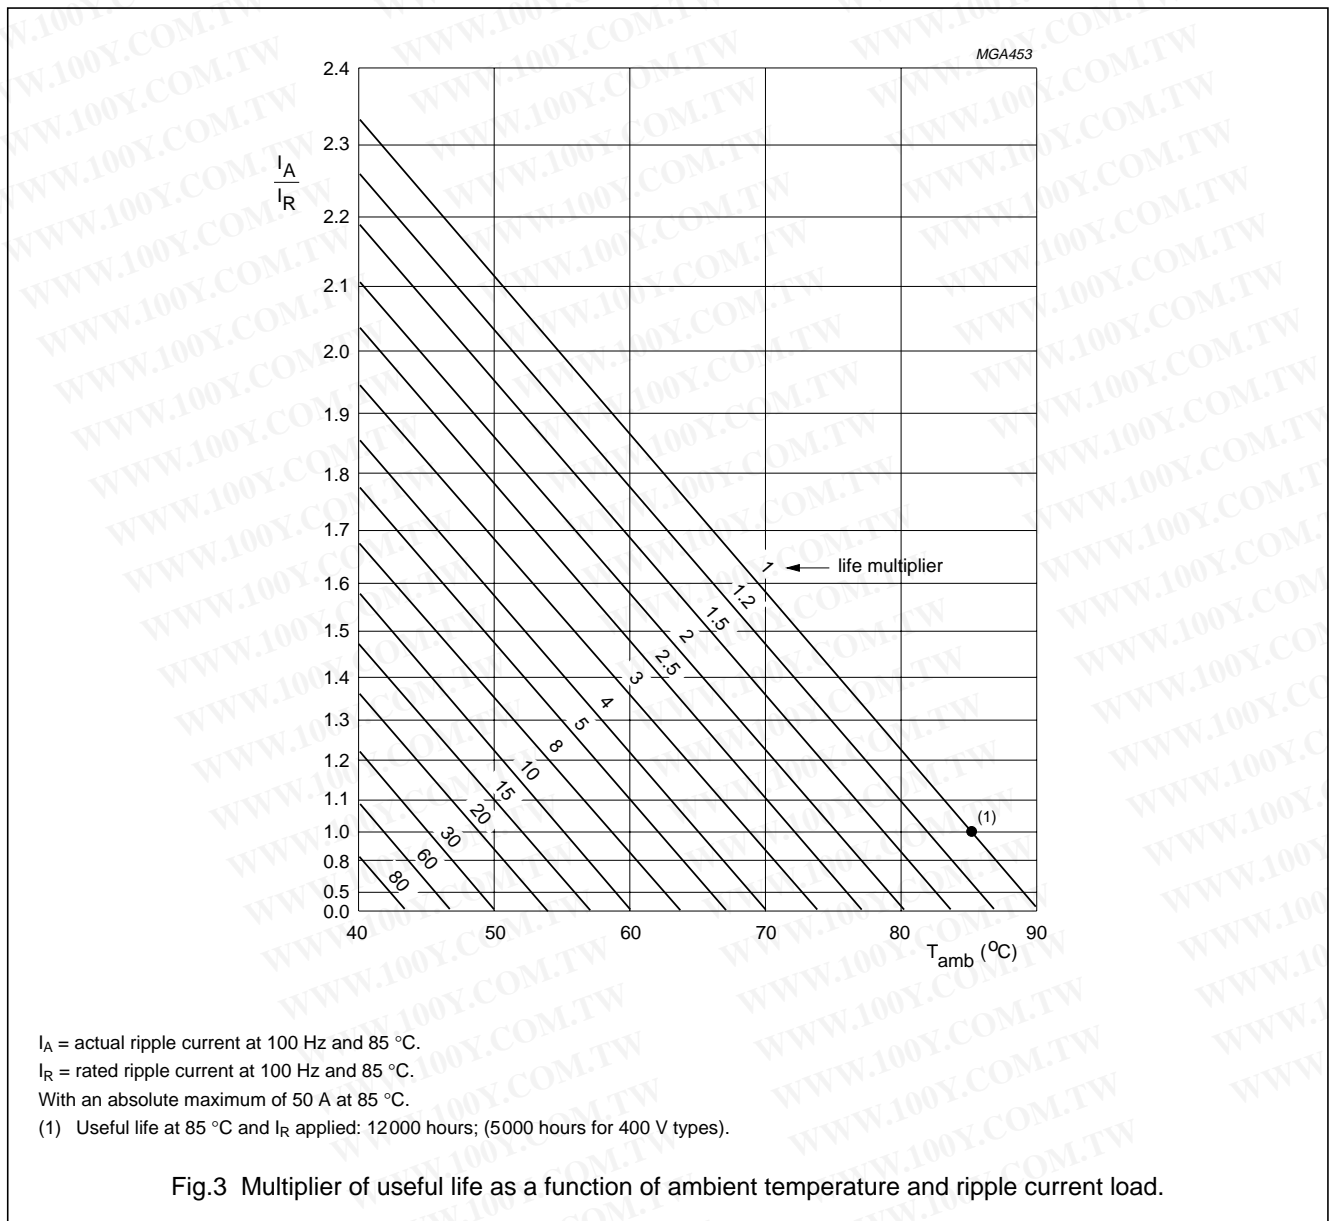


Fig.3 Multiplier of useful life as a function of ambient temperature and ripple current load.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Aluminium electrolytic capacitors

Power Economic Screw Terminals

154/155 PEC-ST

SPECIFIC TESTS AND REQUIREMENTS

General tests and requirements are specified in this handbook, Section "Tests and Requirements".

Table 5 Test procedures and requirements

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 384-4/ CECC 30300 subclause 4.13	$T_{amb} = 85\text{ }^{\circ}\text{C}$; U_R applied; 5000 hours (400 V types: 2000 hours)	$U_R \leq 100\text{ V}$; $\Delta C/C$: $\pm 15\%$ $U_R > 100\text{ V}$; $\Delta C/C$: $\pm 10\%$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85\text{ }^{\circ}\text{C}$; U_R and I_R applied; 12000 hours (400 V types: 5000 hours)	$U_R \leq 100\text{ V}$; $\Delta C/C$: $\pm 45\%$ $U_R > 100\text{ V}$; $\Delta C/C$: $\pm 30\%$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $U_R \leq 100\text{ V}$: $\leq 1\%$; $U_R > 100\text{ V}$: $\leq 3\%$
Shelf life (storage at high temperature)	IEC 384-4/ CECC 30300 subclause 4.17	$T_{amb} = 85\text{ }^{\circ}\text{C}$; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C$: $\pm 10\%$ $I_{L5} \leq 2 \times \text{spec. limit}$

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

L