

Notice for TAIYO YUDEN products

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Please read this notice before using the TAIYO YUDEN products.

! REMINDERS

- Product information in this catalog is as of October 2013. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that TAIYO YUDEN CO., LTD. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact TAIYO YUDEN CO., LTD. for further details of product specifications as the individual specification is available.
- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact TAIYO YUDEN CO., LTD. for more detail in advance.

Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel").
It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.

- Please note that TAIYO YUDEN CO., LTD. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. TAIYO YUDEN CO., LTD. grants no license for such rights.

- Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

CYLINDER TYPE POLYACENE CAPACITORS



WAVE

FEATURES

- Polyacene Capacitors can store a large number of ions into its amorphous structure (doping), therefore Polyacene Capacitors has much larger capacitance than conventional electric double layer capacitors.
- Quick-charge with ampere measure is possible with its Low internal resistance.
- Possible to charge/discharge more than 100,000 times with less deterioration caused by charging/discharging compared to secondary battery which involves chemical reaction, and that enables to more than 100,000 times charge/discharge and large excellence of durability for over charge/discharge.
- Polyacene Capacitors is environmentally friendly power source, which does not contain any heavy metals such as Cd, Hg and Pb. (RoHS compliant)

APPLICATIONS

- Back-up power source for CPU, microcomputer, and flash memory writing when shutting off the power.
- Load change leveling (life lengthening of main power source such as dry battery, Lithium primary battery)
- Power source storage combined with solar cell, fuel cell, generator, and so on.
- Main power source for small devices (Measuring equipments, toys and so on).


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ORDERING CODE

P A S | 0 8 | 1 5 | L S | 2 R 5 | 1 0 5

1 Type	2 Dimensions/ φD [mm]	3 Dimensions/ L [mm]	4 Characteristic Spec	5 Maximum Usable Voltage [V]	6 Nominal Capacitance [F]																																				
PAS Polyacene Capacitors	<table border="1"> <tr><td>08</td><td>8.0</td></tr> <tr><td>10</td><td>10.0</td></tr> <tr><td>12</td><td>12.5</td></tr> <tr><td>18</td><td>18</td></tr> </table>	08	8.0	10	10.0	12	12.5	18	18	<table border="1"> <tr><td>15</td><td>15</td></tr> <tr><td>16</td><td>16</td></tr> <tr><td>20</td><td>20</td></tr> <tr><td>35</td><td>35</td></tr> <tr><td>40</td><td>40</td></tr> </table>	15	15	16	16	20	20	35	35	40	40	<table border="1"> <tr><td>LS</td><td>Low ESR type</td></tr> <tr><td>LA</td><td>High Capacitance type</td></tr> </table>	LS	Low ESR type	LA	High Capacitance type	<table border="1"> <tr><td>2R3</td><td>2.3</td></tr> <tr><td>2R5</td><td>2.5</td></tr> <tr><td>3R0</td><td>3.0</td></tr> </table> <p>※R=decimal point</p>	2R3	2.3	2R5	2.5	3R0	3.0	<table border="1"> <tr><td colspan="2">example</td></tr> <tr><td>105</td><td>10×10⁵ μF=1F</td></tr> <tr><td>5</td><td>5</td></tr> <tr><td>506</td><td>50×10⁶ μF=50F</td></tr> </table>	example		105	10×10 ⁵ μF=1F	5	5	506	50×10 ⁶ μF=50F
08	8.0																																								
10	10.0																																								
12	12.5																																								
18	18																																								
15	15																																								
16	16																																								
20	20																																								
35	35																																								
40	40																																								
LS	Low ESR type																																								
LA	High Capacitance type																																								
2R3	2.3																																								
2R5	2.5																																								
3R0	3.0																																								
example																																									
105	10×10 ⁵ μF=1F																																								
5	5																																								
506	50×10 ⁶ μF=50F																																								

EXTERNAL DIMENSIONS

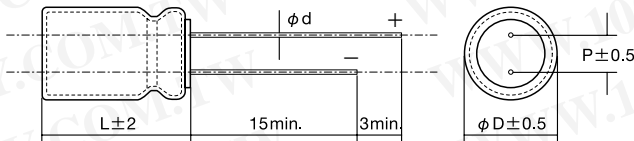

	Part Number	φD	L	φd	P
Low ESR type (LS series)	PAS0815LS2R5105	8.0	15.0	0.6	3.5
	PAS1016LS2R5205	10.0	16.0	0.6	5.0
Large Capacitance type (LA series)	PAS0815LA2R3185	8.0	15.0	0.6	3.5
	PAS1020LA2R3475	10.0	20.0	0.6	5.0
	PAS1020LA3R0405	10.0	20.0	0.6	5.0
	PAS1220LA3R0905	12.5	20.0	0.6	5.0
	PAS1235LA3R0206	12.5	35.0	0.6	5.0
	PAS1840LA3R0506	18.0	40.0	0.8	8.0

Unit : mm

PART NUMBERS

Part Number	Maximum Usable Voltage (V)	Nominal Capacitance (F)	Internal Resistance (mΩ)
Low ESR type (LS series)	2.5	1	70
		2	50
Large Capacitance type (LA series)	2.3	1.8	1000
		4.7	300
		4	300
	3.0	9	200
		20	100
		50	70

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

LS Series

SPECIFICATIONS

Part Number	Operating Temp. Range (°C)	Max. Usable Voltage (V)	Initial Capacitance (F)	Initial Internal Resistance (mΩ)	Temperature Characteristics
PAS0815LS2R5105	-25~+70	2.5	1.0±20%	Under 70	Lowest temperature (-25°C) Capacitance : Over 70% of initial spec. Internal Resistance : Within 4 times of initial spec. Highest temperature (70°C) Capacitance, Internal Resistance : Within initial spec.
PAS1016LS2R5205			2.0±20%	Under 50	


LA Series

SPECIFICATIONS

Part Number	Operating Temp. Range (°C)	Max. Usable Voltage (V)	Initial Capacitance (F)	Initial Internal Resistance (mΩ)	Temperature Characteristics
PAS0815LA2R3185	-25~+60	2.3	1.8±20%	Under 1000	Lowest temperature (-25°C) Capacitance : Over 70% of initial spec. Internal Resistance : Within 4 times of initial spec. Highest temperature (60°C) Capacitance, Internal Resistance : Within initial spec.
PAS1020LA2R3475			4.7±20%	Under 300	
PAS1020LA3R0405	-25~+60	3.0	4.0±20%	Under 300	Lowest temperature (-25°C) Capacitance : Over 70% of initial spec. Internal Resistance : Within 4 times of initial spec. Highest temperature (60°C) Capacitance, Internal Resistance : Within initial spec.
PAS1220LA3R0905			9.0±20%	Under 200	
PAS1235LA3R0206			20±20%	Under 100	
PAS1840LA3R0506			50±20%	Under 70	

PACKAGING

① Minimum Packing Unit (Plastic Bag)



Item	Minimum Packing Unit	Standard Inner Packing Box quantity	
PAS0815	200	10bags	2000
PAS1016	200	10bags	2000
PAS1020	100	15bags	1500
PAS1220	100	10bags	1000
PAS1235	50	10bags	500
PAS1840	10	20bags	200

Standard Inner Packing Box
200mm(W)×330mm(L)×140mm(H)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

RELIABILITY DATA

Items	Specifications			Test Conditions, Remark
	LS Series	LA Series		
1. Operating Temperature range	-25~+70°C	-25~+60°C		
2. Max. Usable Voltage	2.5V	2.3V	3.0V	
3. Floating Charge Characteristics	Capacitance : Over 70% of initial spec. Internal Resistance : Within 4 times of initial spec. Appearance : No noticeable abnormality			Apply a max. usable voltage to capacitor for 1000 hours at max. operating temp. and measure the floating charge characteristics after returning to normal temperature and humidity.
4. Charge/Discharge Cycle Characteristics	Capacitance : Over 70% of initial spec. Internal Resistance : Within 4 times of initial spec. Appearance : No noticeable abnormality			Measure the charge/discharge cycle characteristics after 10000 charge/discharge cycle at 25±5°C with under mentioned charge/discharge cycle test condition for each parts.
5. Thermal Durability	Capacitance : Within initial spec. Internal Resistance : Within initial spec. Appearance : No noticeable abnormality			Leave the capacitor in an atmosphere of Max Operating Temperature±2°C and -25±2°C consecutively for 96 hours each, and return to normal temperature and humidity.
6. Humidity Durability	Capacitance : Within initial spec. Internal Resistance : Within 4 times of initial spec. Appearance : No noticeable abnormality			Temperature : 40±2°C, Humidity : 90~95%RH Leave the capacitor for 500 hours, and return to normal temperature and humidity.
7. Impact Durability	No exterior abnormality observed : initial spec. values retained			According to JIS C 0041 Sine half wave A=294
8. Vibration Durability	No exterior abnormality observed : initial spec. values retained			Apply a sine wave vibration of 1.5mm amplitude and frequency 10~55Hz, for 2 hours per each direction (X, Y and Z), total 6 hours.
9. Soldering	Capacitance : Within initial spec. Internal Resistance : Within initial spec. Appearance : No noticeable abnormality			Material : Sn-3Ag-0.5Cu Solder bath temperature : 260±5°C Dipping time : 10±1 sec. Dipping depth : 1.5~2mm from cell body

● Charge/Discharge Cycle Test Condition


Part Number	PAS0815 LS2R5105	PAS1016 LS2R5205	PAS0815 LA2R3185	PAS1020 LA2R3475	PAS1020 LA3R0405	PAS1220 LA3R0905	PAS1235 LA3R0206	PAS1840 LA3R0506
Charging Voltage (V)	2.5	2.5	2.3	2.3	3.0	3.0	3.0	3.0
Charging Time (s)	10	10	10	10	30	30	30	30
Max. Charging Current (A)	1	1	1	1	2	3	5	10
Discharging Current (A)	1	1	1	1	0.5	1	1	2
Cut off Voltage (V)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

CYLINDER TYPE PAS CAPACITOR

PACKAGING

① Minimum Packing Unit (Plastic Bag)



Item	Minimum Packing Unit	Standard Inner Packing Box quantity	
PAS0815	200	10 bags	2000
PAS1016	200	10 bags	2000
PAS1020	100	15 bags	1500
PAS1220	100	10 bags	1000
PAS1235	50	10 bags	500
PAS1840	10	20 bags	200

Standard Inner Packing Box
200mm(W) × 330mm(L) × 140mm(H)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CYLINDER TYPE PAS CAPACITOR

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

RELIABILITY DATA

1. Operating Temperature range							
Specified Value	LR Series	-25~+60°C					
	LA Series						
2. Max. Usable Voltage							
Specified Value	LR Series	2.3V					
	LA Series	2.3V 3.0V					
3. Floating Charge Characteristics							
Specified Value	LR Series	Capacitance : Over 70% of initial spec.					
	LA Series	Internal Resistance : Within 4 times of initial spec. Appearance : No noticeable abnormality					
Test Methods and Remarks	Apply a max. usable voltage to capacitor for 1000 hours at max. operating temp. and measure the floating charge characteristics after returning to normal temperature and humidity.						
4. Charge/Discharge Cycle Characteristics							
Specified Value	LR Series	Capacitance : Over 70% of initial spec.					
	LA Series	Internal Resistance : Within 4 times of initial spec. Appearance : No noticeable abnormality					
Test Methods and Remarks	Leave the capacitor in an atmosphere of 60°C±2°C and -25±2°C consecutively for 96 hours each, and return to normal temperature and humidity.						
	Charge/Discharge Cycle Test Condition						
	Part Number	PAS0815 LR2R3105	PAS1016 LR2R3205	PAS0815 LA2R3185	PAS1020 LA2R3475	PAS1220 LA2R3106	PAS1235 LA2R3226
	Charging Voltage (V)	2.3	2.3	2.3	2.3	2.3	2.3
	Charging Time (s)	10	10	10	10	10	10
	Max. Charging Current (A)	1	1	1	1	1	1
	Discharging Current (A)	1	1	1	1	1	1
	Cut off Voltage (V)	1.5	1.5	1.5	1.5	1.5	1.5
	Part Number	PAS1840 LA2R3566	PAS1020 LA3R0405	PAS1220 LA3R0905	PAS1235 LA3R0206	PAS1840 LA3R0506	
	Charging Voltage (V)	2.3	3	3	3	3	
	Charging Time (s)	30	30	30	30	30	
	Max. Charging Current (A)	5	2	3	5	10	
	Discharging Current (A)	5	0.5	1	1	2	
	Cut off Voltage (V)	1.5	1.5	1.5	1.5	1.5	
5. Thermal Durability							
Specified Value	LR Series	Capacitance : Within initial spec.					
	LA Series	Internal Resistance : Within initial spec. Appearance : No noticeable abnormality					
Test Methods and Remarks	Leave the capacitor in an atmosphere of 60°C±2°C and -25±2°C consecutively for 96 hours each, and return to normal temperature and humidity.						
6. Humidity Durability							
Specified Value	LR Series	Capacitance : Within initial spec.					
	LA Series	Internal Resistance : Within 4 times of initial spec. Appearance : No noticeable abnormality					
Test Methods and Remarks	Temperature : 40±2°C, Humidity : 90~95%RH Leave the capacitor for 500 hours, and return to normal temperature and humidity.						

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

7. Impact Durability		
Specified Value	LR Series	No exterior abnormality observed : initial spec. values retained
	LA Series	
Test Methods and Remarks	According to JIS C 0041 Sine half wave A=294	

8. Vibration Durability		
Specified Value	LR Series	No exterior abnormality observed : initial spec. values retained
	LA Series	
Test Methods and Remarks	Apply a sine wave vibration of 1.5mm amplitude and frequency 10~55Hz, for 2 hours per each direction (X, Y and Z), total 6 hours.	

9. Solder Heat Resistance		
Specified Value	LR Series	Capacitance : Within initial spec.
	LA Series	Internal Resistance : Within initial spec. Appearance : No noticeable abnormality
Test Methods and Remarks	Material : Sn-3Ag-0.5Cu Solder bath temperature : 260±5°C Dipping time : 10±1 sec. Dipping depth : 1.5~2mm from cell body	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CYLINDER TYPE PAS CAPACITOR

■ PRECAUTIONS

1. Use under the maximum usable voltage
If over maximum usable voltage is applied, it might cause abnormal current flow, which shorten lifetime and sometimes damage PAS capacitor.
2. Use under maximum operating temperature
Not only shorter life time but also leakage and damage will happen by increasing internal pressure if PAS capacitor use in over max operating temperature.
3. Limited life time
Lifetime of PAS capacitor is greatly affected by surrounding temperature. 10°C drop in temperature extend its expected lifetime approximately twice as much. Design a circuit under consideration of deterioration of electrical characteristics after long time usage, decreasing in capacitance and increasing in internal resistance.
4. The electrical characteristics of capacitors vary with respect to temperature
The electrical characteristics of PAS capacitors temporarily vary with respect to temperature separately from secular change mentioned above. Design a circuit under consideration of temperature characteristics.
5. PAS capacitor has polarity
PAS capacitor has polarity. Please check the polarity before use. It will be damaged if it is reversely charged.
6. Mind high ripple current or rapid charge / discharge
In circuit with high ripple current or rapid charge / discharge, the lifetime of PAS capacitors might be shortened by self-heating.
7. Mind voltage drop when discharging
When back-up (discharging) starts, voltage drop because of active current and internal resistance.
8. Series connection
In case of using PAS capacitor in series connection, the voltage of each capacitor is not always equal and it may be occurred excessive voltage in a part of capacitor, which may lead to shortening lifetime and breakdown. Take a margin against a rated voltage or add a balancing resistor.
9. PAS capacitor has the pressure release vent
In case of inside pressure of capacitor excessively rising, the pressure release vent will be opened in order to release inner gas. Following clearance (Diameter $\phi 18$: over 2mm, Diameter $\geq \phi 18</math>: over 3mm) should be made above the pressure release vent.
Don't set up wiring or a pattern in the upper part of the pressure release vent, so that the high temperature gas is gushed when the pressure release vent open.
The product which open the pressure release vent can not use.$
10. The sleeve of the PAS capacitor is not guaranteed insulation
Short circuit might happen if circuit pattern is set underneath of PAS capacitor or it fixed by a metal or it contact with other component.
11. Environmental of usage
In case PAS capacitor is used in the high humidity, alkaline or acid air, it may cause deterioration of its performance, electrolyte leak and short circuit by corrosion of outer can or lead terminal.
In addition, used in sudden temperature change or high humidity, it may cause deteriorating of its performance and electrolyte leak by dew condensation.
12. Don't apply shock and vibration or pressure
PAS capacitor is sensitive to shock. Don't drop PAS capacitor and not apply strong pressure to a body, terminals and lead. Soldering part or lead terminal might be damaged if applying vibration, shock and stress such as pinch, tip, push and twist after installed.
13. Soldering
If next each item is not minded, it may cause deteriorating of its performance, leakage, shortening lifetime.
 - Don't contact solder iron to a cell body.
 - Don't solder over solder conditions in the spec sheet.
14. Cleaning condition when cleaning circuit-board after soldering
Cleaning may affect PAS capacitor. Consult us about cleaning conditions beforehand.
Some cleaning conditions cause detrimental influence.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

15. Storage

Keep following cautions for storage of PAS capacitor.

- Don't store in the high temperature, the high humidity condition and a place where receiving direct sunlight. Storing PAS capacitor in the room condition of 10°C – 35°C and less than 65% relative humidity is recommended. Sudden temperature change or high humidity may cause deteriorating of its characteristics and Soldering.
- Don't store PAS capacitor near water, salt water or oil, and it the dew condensation, gasified oil or salinity filled place.
- Don't store PAS capacitor in the hazardous gas (hydrogen sulfide, sulfurous, chlorine, ammonia, bromine, methyl bromine and etc).
- Don't fumigate by halogen fumigant.
- Don't store PAS capacitor near acid or alkaline solvent.
- Don't store PAS capacitor in a place where exposed to ozone, ultraviolet or x-ray.
- Don't store PAS capacitor in a place where vibration and shock might occur in.

16. Disposal

Dispose PAS capacitor in accordance with local and country rules and regulations.

17. Usage

PAS capacitor is developed on the assumption of the memory-backup & RTC for usage of information & communication equipment, home electronics, audio & visual equipment, office equipment and etc. Consult us about using high reliability and safety required products such as medical equipment, transportation equipment, industrial equipment, flight / space equipment and emergency equipment.

18. Other Notice

- Don't heat or throw PAS capacitor into fire.
- Don't short.
- Don't solder directly to a cell body.
- Don't open a body
- Don't deform.
- Don't apply pressure.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)