



Analog Semiconductor IC

VRH Series

High speed, Low dropout, $\pm 1\%$ High output accuracy
CMOS Voltage Regulator with On/Off circuit

Rev. E10-06

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

AnaSem Inc.

..... Future of the analog world



AnaSem

Products Data Sheet

Analog Semiconductor IC

High speed, Low dropout, $\pm 1\%$ High output accuracy with On/Off circuit CMOS Voltage Regulator

VRH Series

GENERAL DESCRIPTIONS

The VRH series are positive voltage regulators with high speed, low voltage dropout and high accuracy output achieved by low current consumption. The output voltage is guaranteed within $\pm 1\%$ within the given temperature range by Vref controlling the temperature characteristic. It corresponds to the low ESR capacitor as an output stabilization capacitor. The charged ESR capacitor can be discharged with an internal switch by making the EN=Vss, as a result the VOUT quickly returns to the Vss level. To make the current capacity of the output transistor not exceeded, the over-current protection circuit is built in.



RoHS
COMPLIANCE

FEATURES

- Output voltage range 0.9V~5.0V (selectable with a step of 0.05V)
- Operating voltage range 1.6V~6.0V
- High accuracy output voltage $\pm 1\%$ (VOUT=1.95V ~ 5.0V) / $\pm 20\text{mV}$ (VOUT=0.9V ~ 1.9V)
- Maximum output current 250mA
- Dropout voltage Typ. 90mV (output=3.0V, IOUT=100mA)
- Low current consumption Typ. 25 μA
- High ripple rejection Typ. 75dB at 1KHz
- Low ESR capacitor 1.0 μF ceramic capacitor
- Operating temperature range $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Built-in over-current protector Limit current : 300mA
- CL high-speed auto-discharge
- Built-in On/Off circuit
- Small package SOT-25 (600mW), SSOT-25 : A-type (350mW), LLP-4 (1000mW) , SON-6 (1000mW)

APPLICATIONS

- Battery powered devices
- Cellular phone
- Digital / Video cameras
- Portable games
- Handheld instruments

PRODUCTS NUMBERING GUIDE

VRH □ □ □ □ □ □ □

Discharge function

X : Auto discharge

Package form

T : SOT-25
S : SSOT-25 (A-type)
L : LLP-4
N : SON-6


Function specification

L : $V_{OUT}=0.9V\sim 1.9V$
N : $V_{OUT}=1.95V\sim 5.0V$

Accuracy rate

1 : $\pm 1\%$
2 : $\pm 20mV$

Output voltage

090 ~ 500 : Selectable with a step of 0.05V
in the range of 0.9V ~ 5.0V
e.g.) 090 : 0.90V, 285 : 2.85V**PIN CONFIGURATION / MARKING SPECIFICATION (SOT-25)**

(Top view)


● **Pin Configuration**

No.	Symbol	Descriptions
1	VIN	Voltage input
2	VSS	Power ground
3	EN	Chip enable
4	NC	Non connection (open)
5	VOUT	Output

● **Marking Specification**

Code	Mark	Contents
A	H	Products series name
BCD	090~500	Output voltage
E	X	Discharge function
F	Internal rule	Lot number

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PIN CONFIGURATION / MARKING SPECIFICATION (SSOT-25 : A-TYPE)


(Top view)

● **Pin Configuration**

No.	Symbol	Descriptions
1	EN	Chip enable
2	NC	Non connection (open)
3	VSS	Power ground
4	VOUT	Output
5	VIN	Voltage input

● **Marking Specification**

Code	Mark	Contents
A	H	Products series name
BCD	090~500	Output voltage
E	X	Discharge function
F	Internal rule	Lot number

PIN CONFIGURATION / MARKING SPECIFICATION (LLP-4)

(Top view)


● **Pin Configuration**

No.	Symbol	Descriptions
1	VOUT	Output
2	VSS	Power ground
3	EN	Chip enable
4	VIN	Voltage input
5	VSS	Power ground

● **Marking Specification**

Code	Mark	Contents
A	H	Products series name
B	X	Discharge function
CDE	090~500	Output voltage
F	Internal rule	Lot number

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

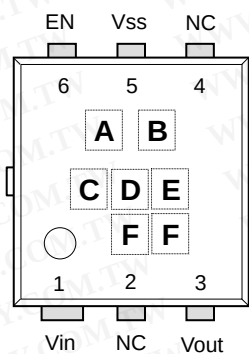PIN CONFIGURATION / MARKING SPECIFICATION (SON-6)

(Top view)


● **Pin Configuration**

No.	Symbol	Descriptions
1	V _{IN}	Voltage input
2	NC	Non connection (open)
3	V _{OUT}	Output
4	NC	Non connection (open)
5	V _{SS}	Power ground
6	EN	Chip enable

● **Marking Specification**

Code	Mark	Contents
A	H	Products series name
B	X	Discharge function
CDE	090~500	Output voltage
F	Internal rule	Lot number

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

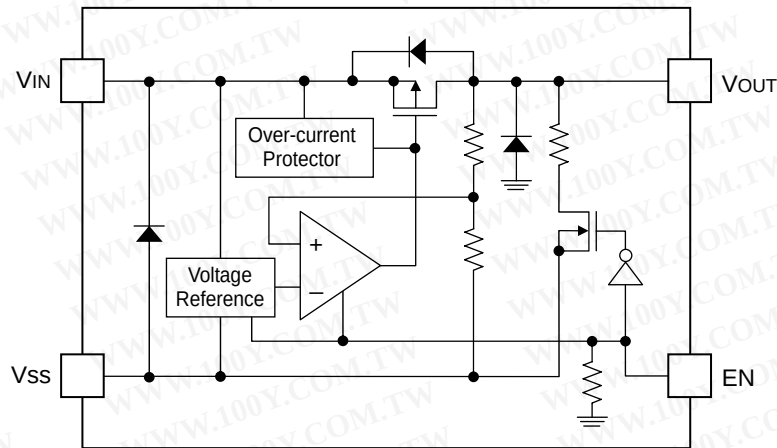
BLOCK DIAGRAM**ABSOLUTE MAXIMUM RATINGS**

Items		Symbol	Ratings	Unit
Input voltage range		V _{IN}	-0.3 ~ +7.0	V
Output current		I _{OUT}	500	mA
Output voltage range		V _{OUT}	V _{SS} -0.3 ~ V _{IN} +0.3	V
Power dissipation ※1)	SOT-25	P _D	600 (on PCB)	mW
	SSOT-25	P _D	350 (on PCB)	mW
	LLP-4	P _D	1000 (on PCB)	mW
	SON-6	P _D	1000 (on PCB)	mW
Operating temperature range		T _{OPR}	-40 ~ +85	°C
Storage temperature range		T _{STG}	-55 ~ +125	°C

Note :

※1) Power dissipation depends on conditions of mounting on boards.

PCB dimension is 50mm×50mm×1.6mm.

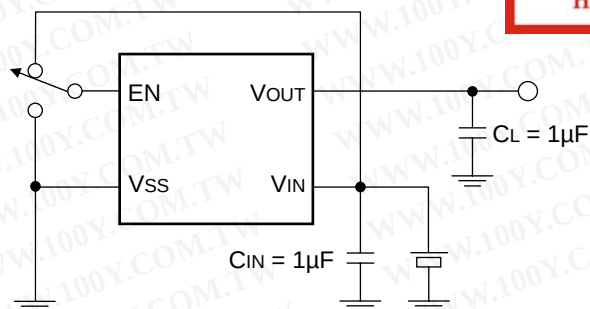TYPICAL APPLICATION CIRCUITS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL CHARACTERISTICS

(Ta=25°C unless otherwise specified)

Items	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test circuit
Output voltage	V _{OUT}	V _{OUT} +1.0V ≤ V _{IN} ≤ 6.0V I _{OUT} =30mA Ta=-40°C ~ +85°C	V _{OUT} ≥ 1.95V	V _{OUT} × 0.99	V _{OUT} × 1.01	V	1
			V _{OUT} ≤ 1.90V	-20	-	+20 mV	
Output current	I _{OUT}	V _{IN} ≥ V _{OUT} +1.0V	0.9V ≤ V _{OUT} ≤ 1.15V	-	250	-	1
			1.2V ≤ V _{OUT} ≤ 1.65V	-	250	-	
			1.7V ≤ V _{OUT} ≤ 2.25V	-	250	-	
			2.3V ≤ V _{OUT} ≤ 2.85V	-	250	-	
			2.9V ≤ V _{OUT} ≤ 3.45V	-	250	-	
			3.5V ≤ V _{OUT} ≤ 4.05V	-	250	-	
			4.0V ≤ V _{OUT} ≤ 5.00V	-	250	-	
Dropout voltage	V _{DROP}	I _{OUT} =100mA	0.9V ≤ V _{OUT} ≤ 1.15V	-	580	910	1
			1.2V ≤ V _{OUT} ≤ 1.65V	-	210	340	
			1.7V ≤ V _{OUT} ≤ 2.25V	-	130	205	
			2.3V ≤ V _{OUT} ≤ 2.85V	-	100	150	
			2.9V ≤ V _{OUT} ≤ 3.45V	-	90	137	
			3.5V ≤ V _{OUT} ≤ 4.05V	-	85	125	
			4.1V ≤ V _{OUT} ≤ 5.00V	-	80	115	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL CHARACTERISTICS (continued)


(Ta=25°C unless otherwise specified)

Items	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test circuit
Current consumption	I _{DD}	V _{IN} =V _{OUT} +1.0V, V _{OUT} =Open, I _{OUT} =0mA	-	25	40	μ A	2
Standby current	I _{STB}	EN=V _{SS}	-	0.01	0.1	μ A	2
Input voltage	V _{IN}		1.6	-	6.0	V	1
Load regulation	Δ V _{OUT}	V _{IN} =V _{OUT} +1.0V, I _{OUT} =0.1mA ~ 100mA	-	10	40	mV	1
Line regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +1.0V $\leq$ V _{IN} $\leq$ 6.0V, I _{OUT} =30mA	-	0.01	0.1	%/V	1
Ripple rejection	R _r	V _{IN} =V _{OUT} +1.0V, f=1KHz, Δ V _{RIP} =0.5VP-P, I _{OUT} =30mA	-	75	-	dB	3
Limit current	I _{LIMIT}	EN=V _{IN}	300	-	-	mA	1
Short circuit current	I _{SHORT}	V _{IN} =V _{OUT} +1.0V, V _{OUT} =0V	-	40	-	mA	1
Output voltage temperature coefficient	$\frac{\Delta V_{OUT}}{\Delta T \cdot V_{OUT}}$	V _{EN} =V _{IN} , I _{OUT} =300mA Ta=-40°C ~ +85°C		± 20		ppm/ °C	1
EN high level voltage	V _{ENH}		1.2	-	6.0	V	4
EN low level voltage	V _{ENL}		-	-	0.3	V	4
EN high level current	I _{ENH}	V _{EN} = V _{IN}	-0.1	-	0.1	μ A	4
EN low level current	I _{ENL}	V _{EN} = V _{SS}	-0.1	-	0.1	μ A	4
CL auto-discharge resistance	R _{DIS}	V _{IN} =6.0V, V _{OUT} =4.0V, V _{EN} = V _{SS}	-	160	-	Ω	1


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TEST CIRCUITS


- **Circuit (1)** - Output voltage, Output current, Dropout voltage, Input voltage, Load regulation, Line regulation, Limit current, Short circuit current, Output voltage temperature coefficient, CL auto-discharge resistance

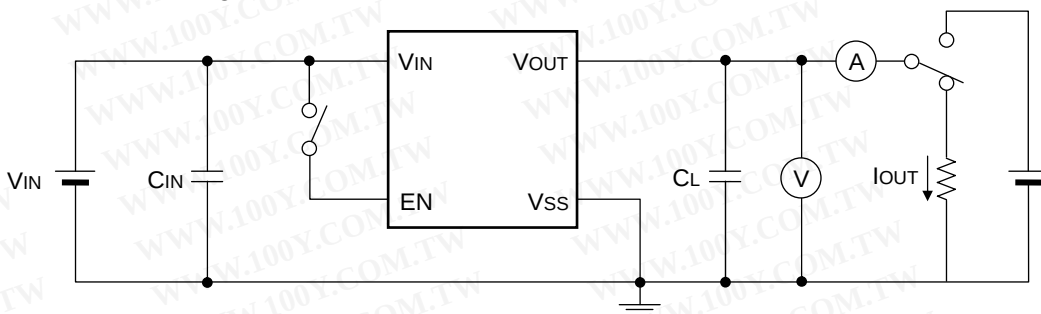


- **Circuit (2)** - Current consumption, Standby current

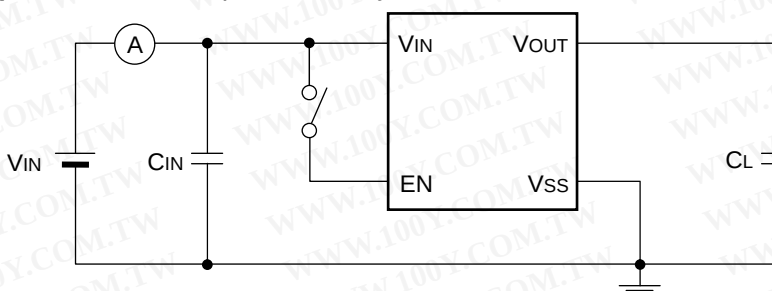

- **Circuit (3)** - Ripple rejection

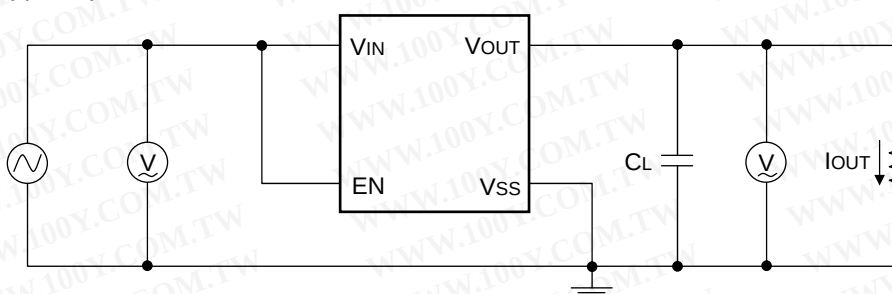


- **Circuit (4)** - EN high level voltage, EN low level voltage, EN high level current, EN low level current

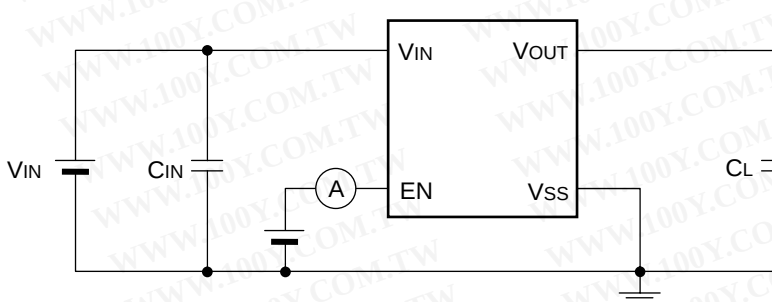

DESCRIPTION OF OPERATION

● General operation

In reference to following block diagram of the VRH series ;

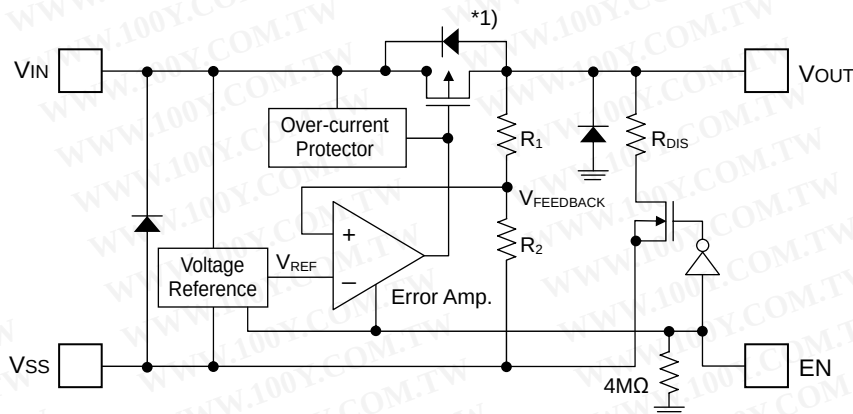

By the error amplifier, the reference voltage (V_{REF}) is compared with $V_{FEEDBACK}$ which is divided by feedback resistors R_1 and R_2 . It supplies the output transistor (see note *1) to keep a stabilized output voltage against with any fluctuation of input voltage by negative feedback system.

Note *1)

The VRH series has P-channel MOSFET which is connected to the VOUT terminal as the output transistor. To prevent the VRH series from being damaged due to inverse current from VOUT terminal to VIN terminal through a parasitic diode, VOUT should not be exceeded $V_{IN} + 0.3V$.

● EN terminal (shutdown function) & CL auto-discharge

The VRH series can be shutdown through EN terminal. The P-channel MOSFET is turned off and operation of all internal circuits stops to reduce the current consumption when the signal of EN terminal is set to the shutdown level. In shutdown mode, the VRH series enables the electric charge at the CL to be discharged via the auto-discharge resistance (R_{DIS} ; 160 Ω), and the VOUT terminal can be rapidly returned to the VSS level as a result.

● Output capacitor (CL)

For phase compensation, an output capacitor (C_L) is required to connected between VOUT terminal and VSS terminal as close as possible. A ceramic capacitor with capacitance value of at least 1.0 μF is recommended. Of course, the suitable capacitance value should be different by the condition of each application. In addition, an input capacitor (C_{IN}) with capacitance value of at least 1.0 μF is also recommended between VIN terminal and VSS terminal for stable input power.


● Over current protection and short circuit protection

Built-in over current protection circuit performs circuit protection from over current as a current limiter. When the load current reaches the limit level, the output voltage drops and output current also decreases accordingly. A current of typ. 40mA will flow when output terminal is shorted.


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – Output Voltage vs. Output Current


● VRH1202xxx (VOUT=1.2V)

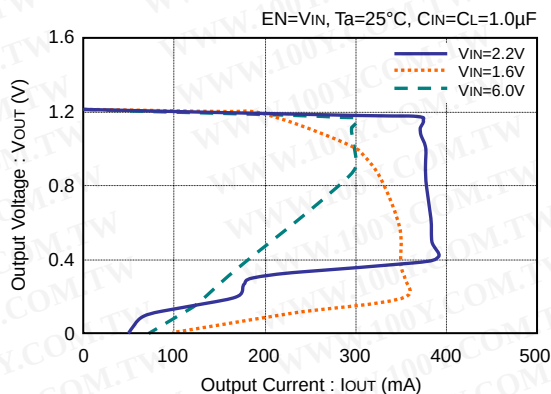


● VRH1202xxx (VOUT=1.2V)

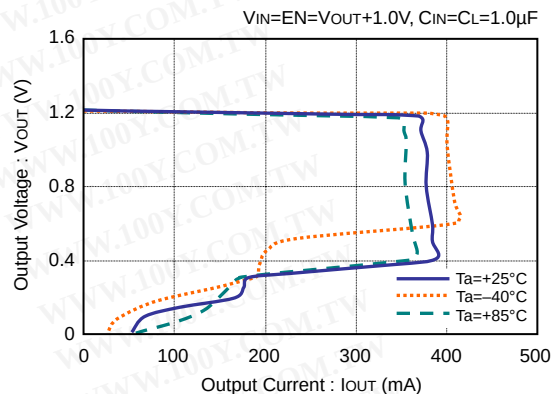


● VRH1802xxx (VOUT=1.8V)

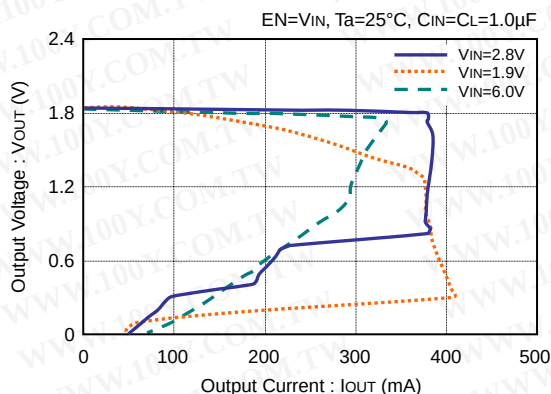


● VRH1802xxx (VOUT=1.8V)

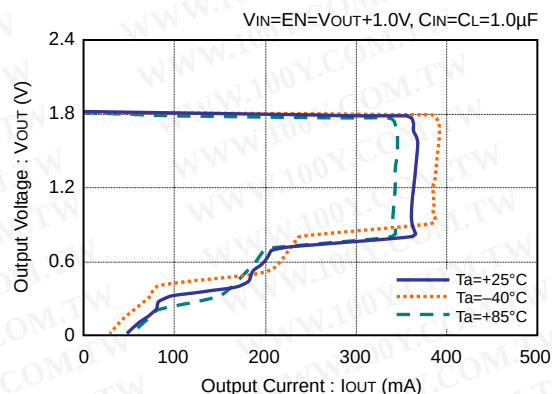

● VRH2801xxx (VOUT=2.8V)

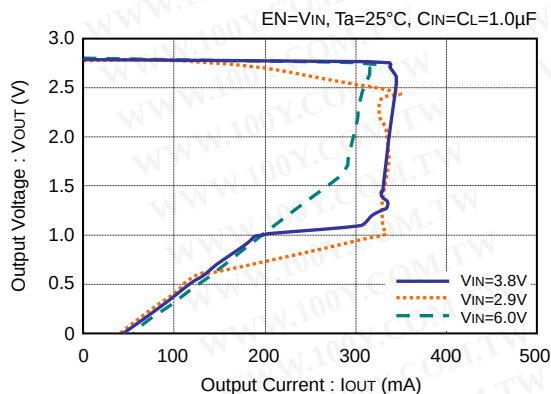


● VRH2801xxx (VOUT=2.8V)

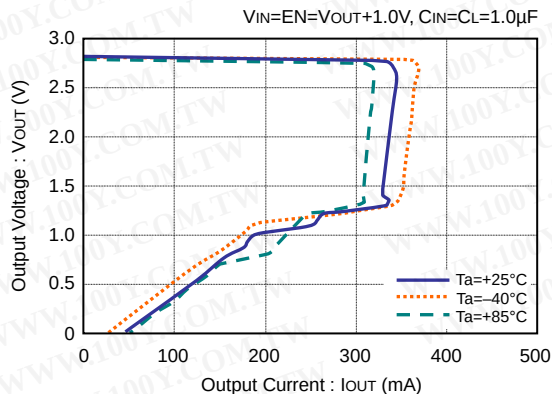


TYPICAL CHARACTERISTICS – Output Voltage vs. Output Current (continued)


● VRH3001xxx (V_{OUT}=3.0V)

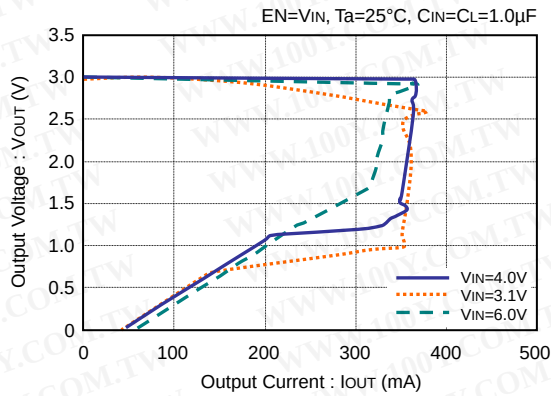


● VRH3001xxx (V_{OUT}=3.0V)

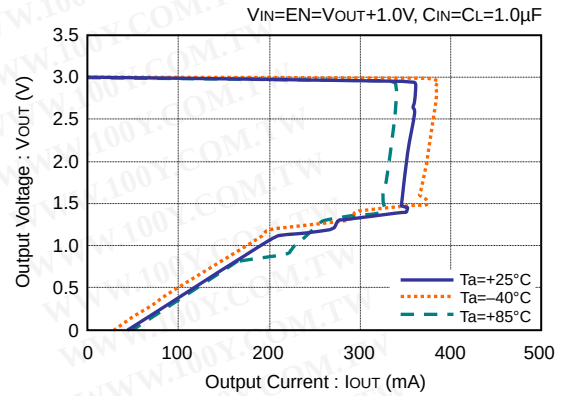







● VRH3301xxx (V_{OUT}=3.3V)

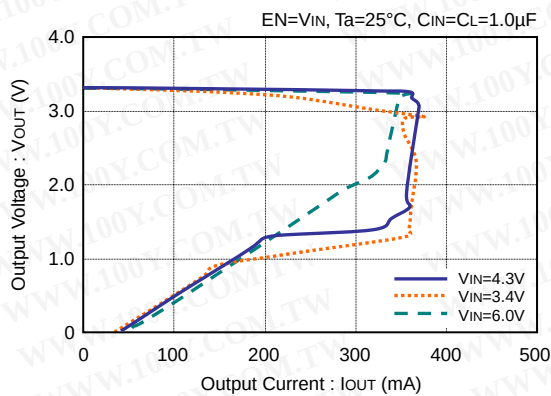

● VRH3301xxx (V_{OUT}=3.3V)

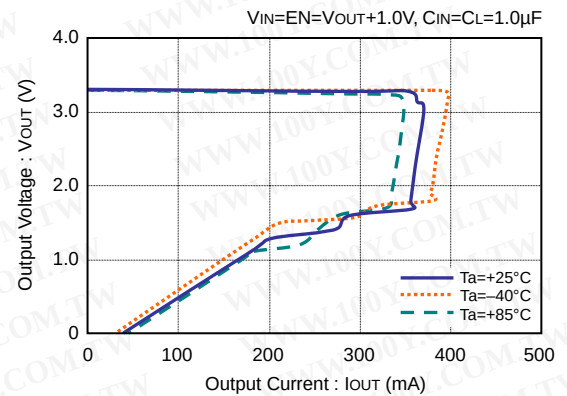


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

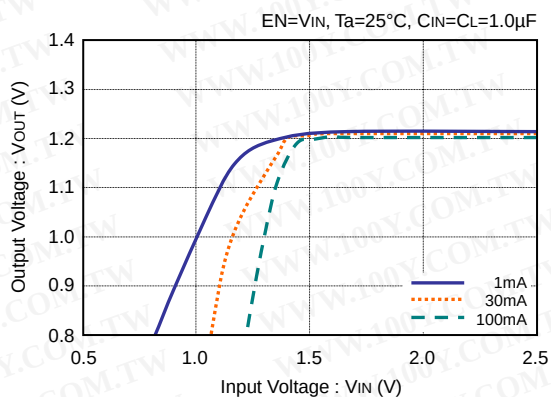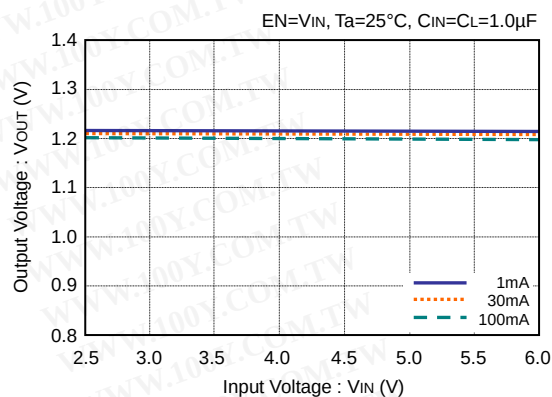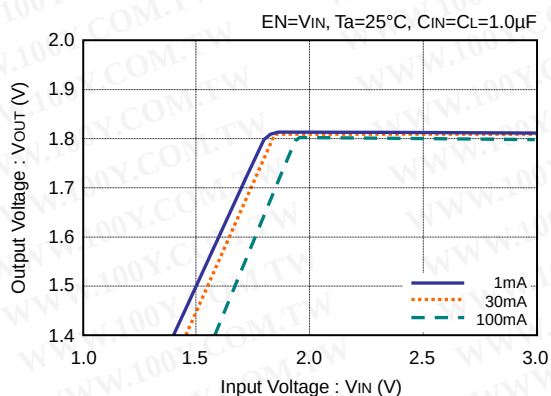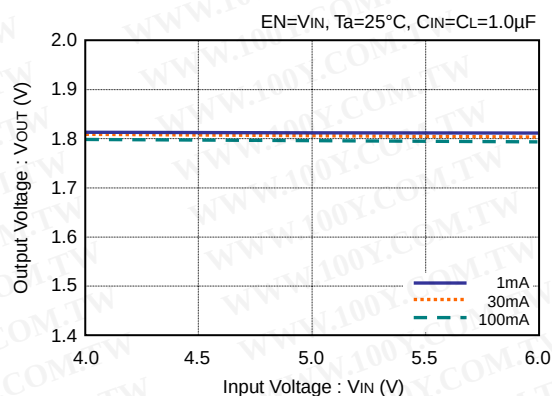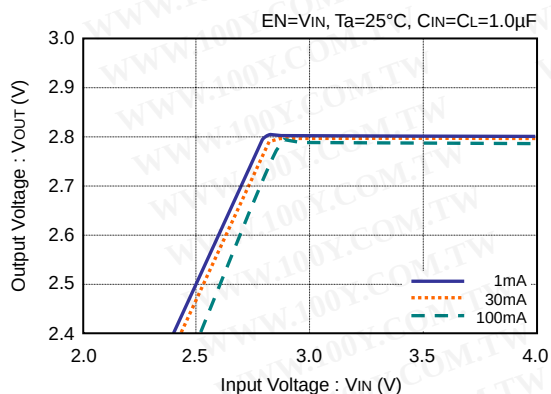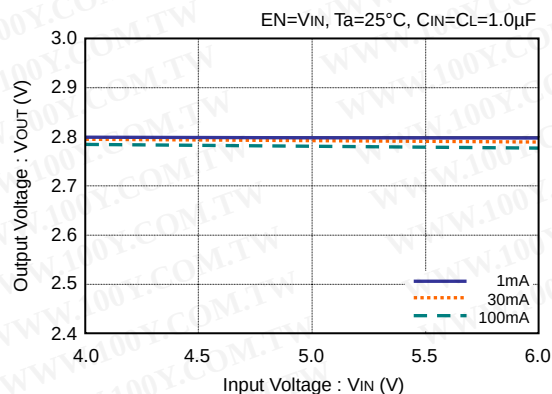
TYPICAL CHARACTERISTICS – Output Voltage vs. Input Voltage● **VRH1202xxx (V_{OUT}=1.2V)**● **VRH1202xxx (V_{OUT}=1.2V)**● **VRH1802xxx (V_{OUT}=1.8V)**● **VRH1802xxx (V_{OUT}=1.8V)**● **VRH2801xxx (V_{OUT}=2.8V)**● **VRH2801xxx (V_{OUT}=2.8V)**

TYPICAL CHARACTERISTICS – Output Voltage vs. Input Voltage (continued)


● VRH3001xxx (V_{OUT}=3.0V)

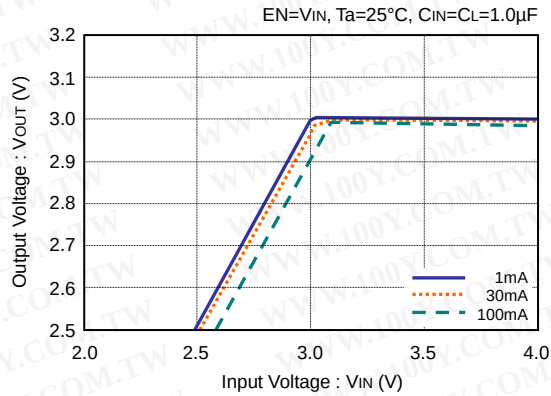


● VRH3001xxx (V_{OUT}=3.0V)

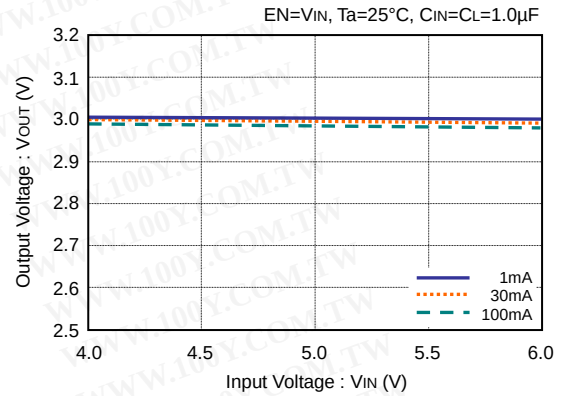

● VRH3301xxx (V_{OUT}=3.3V)

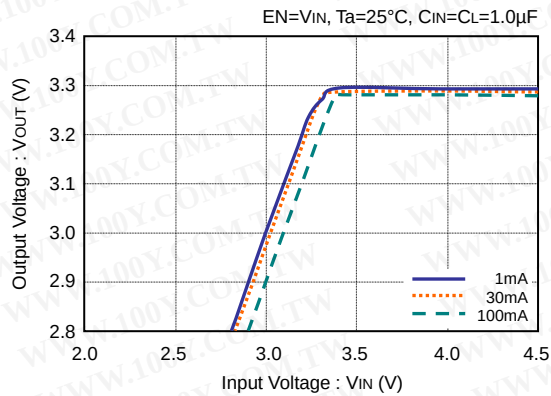


● VRH3301xxx (V_{OUT}=3.3V)

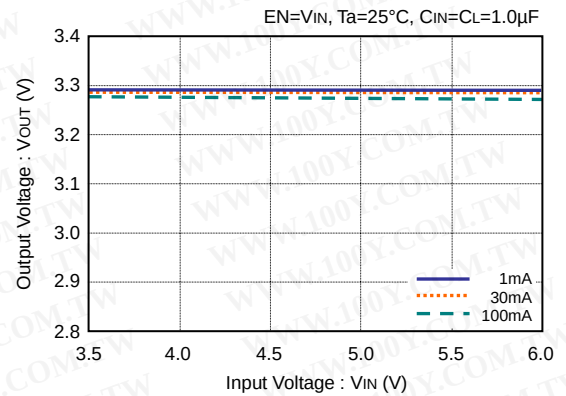


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – Dropout Voltage vs. Output Current


● VRH1202xxx (V_{OUT}=1.2V)

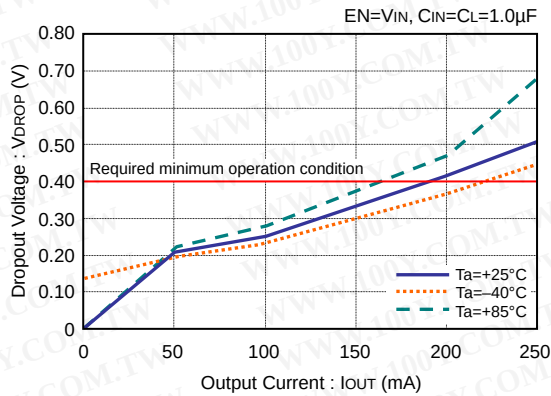


● VRH1802xxx (V_{OUT}=1.8V)

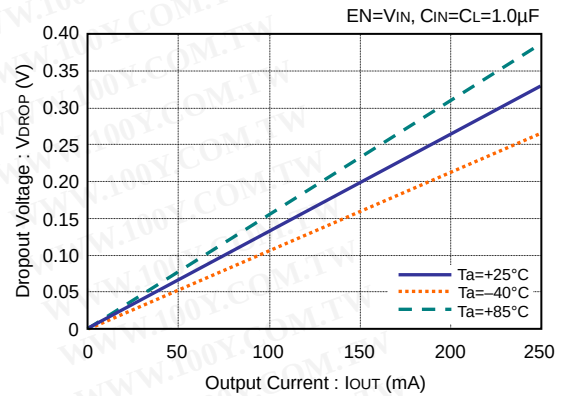


● VRH2801xxx (V_{OUT}=2.8V)

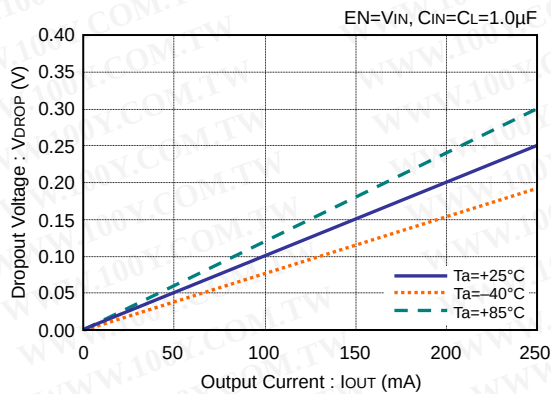







● VRH3001xxx (V_{OUT}=3.0V)

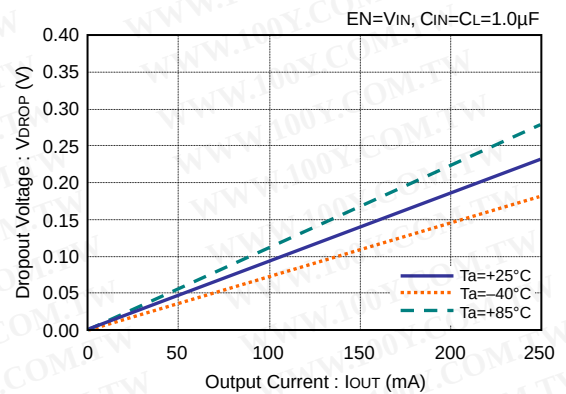

● VRH3301xxx (V_{OUT}=3.3V)

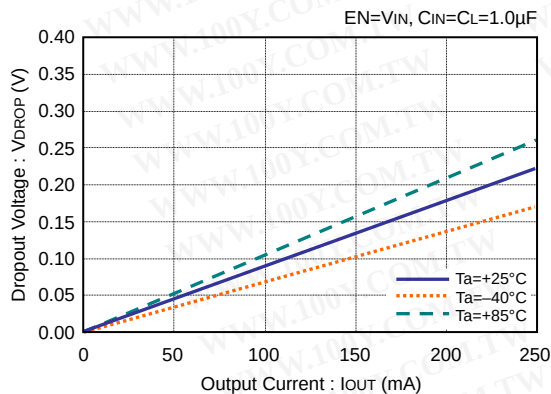

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

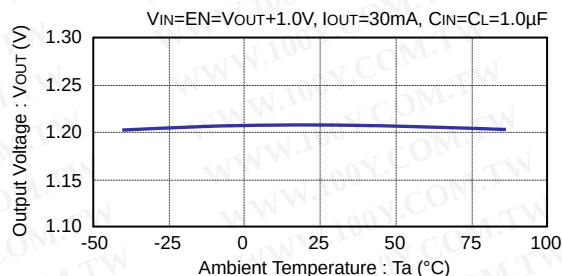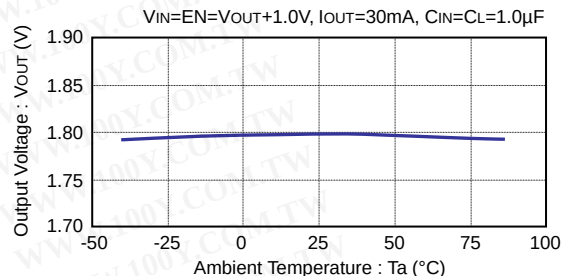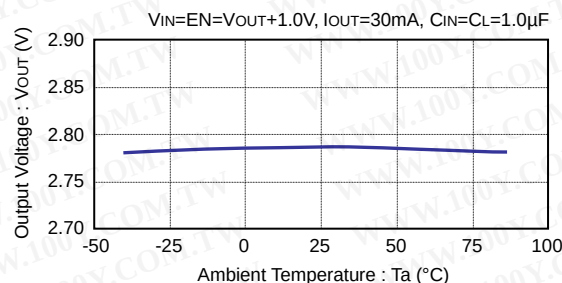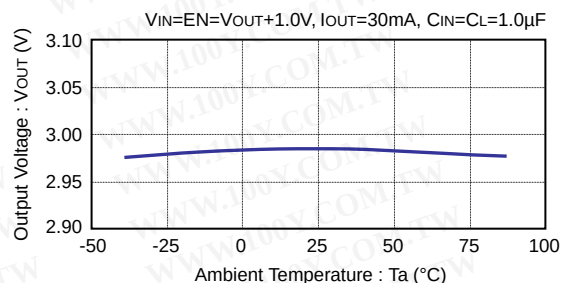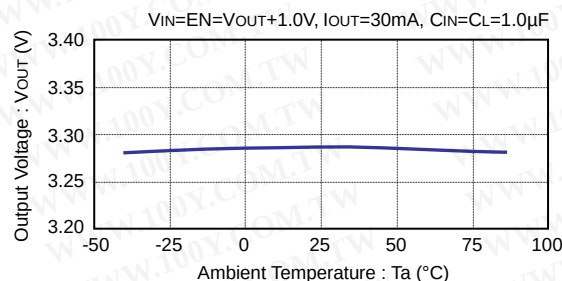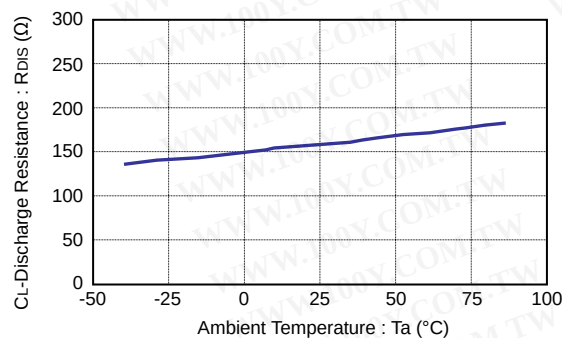
TYPICAL CHARACTERISTICS – Output Voltage vs. Ambient Temperature● **VRH1202xxx (V_{OUT}=1.2V)**● **VRH1802xxx (V_{OUT}=1.8V)**● **VRH2801xxx (V_{OUT}=2.8V)**● **VRH3001xxx (V_{OUT}=3.0V)**● **VRH3301xxx (V_{OUT}=3.3V)****TYPICAL CHARACTERISTICS – CL-Discharge Resistance vs. Ambient Temperature**

V_{IN}=6.0V, E_N=V_{SS}, V_{OUT}=4.0V
C_{IN}=C_L=1.0 μ F


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – Supply Current vs. Input Voltage


● VRH1202xxx (V_{OUT}=1.2V)

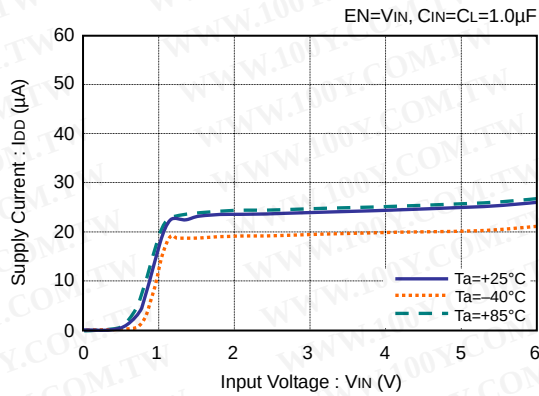


● VRH1802xxx (V_{OUT}=1.8V)

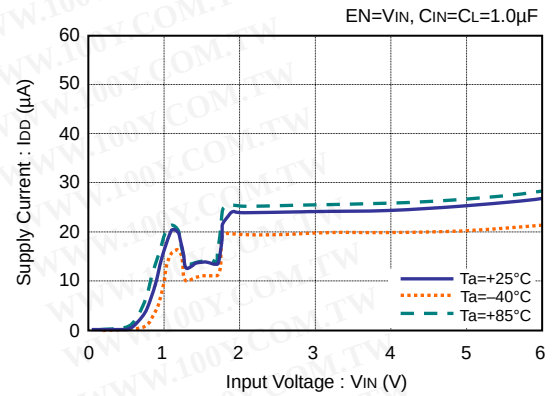


● VRH2801xxx (V_{OUT}=2.8V)

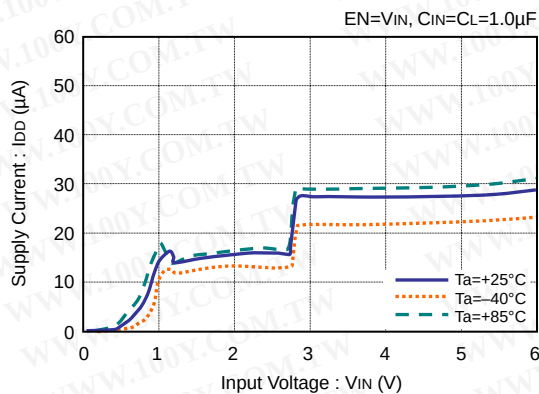

● VRH3001xxx (V_{OUT}=3.0V)

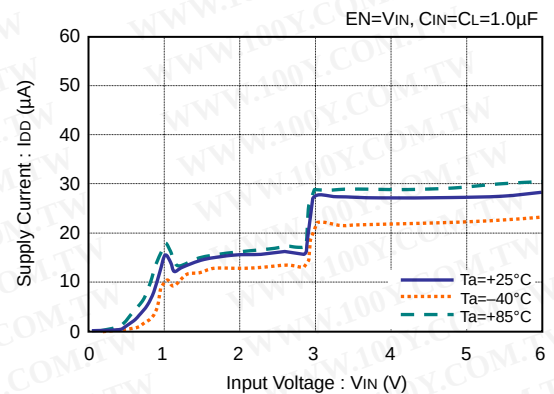


● VRH3301xxx (V_{OUT}=3.3V)

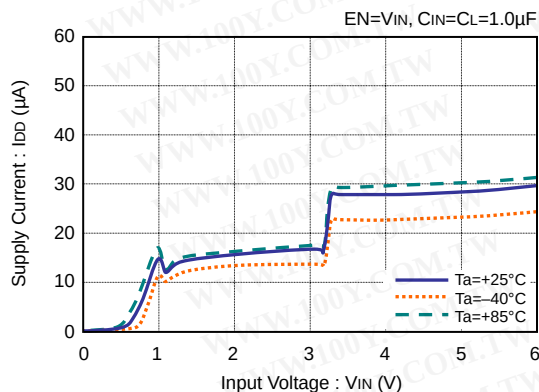


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – Load Transient Response


● VRH1202xxx (VOUT=1.2V)

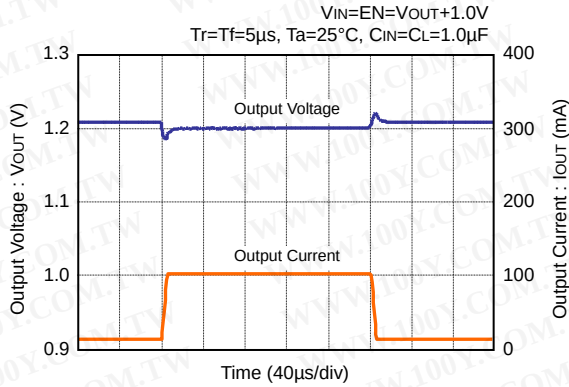


● VRH1802xxx (VOUT=1.8V)

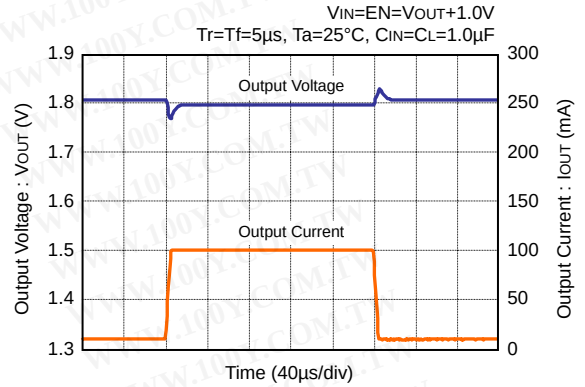


● VRH2801xxx (VOUT=2.8V)

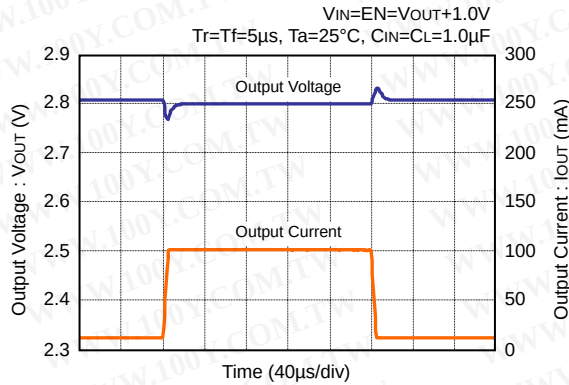






● VRH3001xxx (VOUT=3.0V)

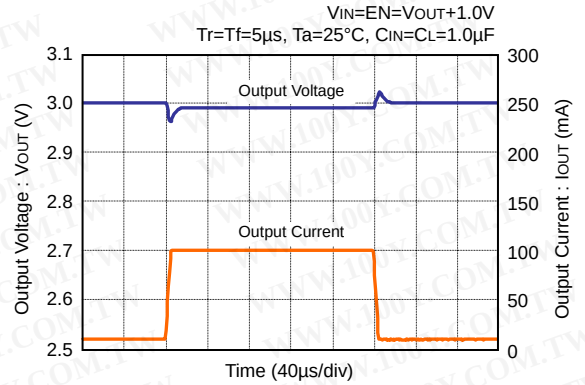






● VRH3301xxx (VOUT=3.3V)

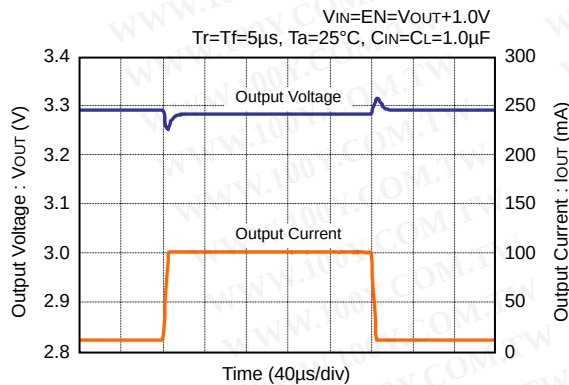






勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

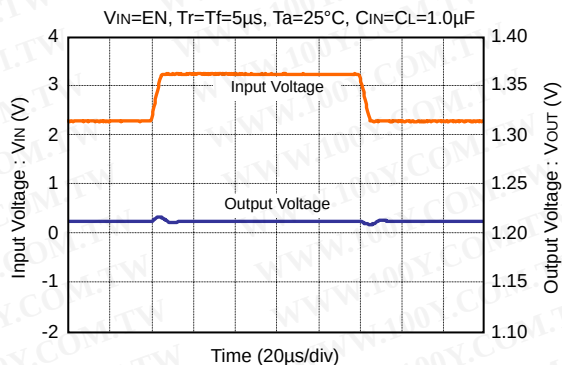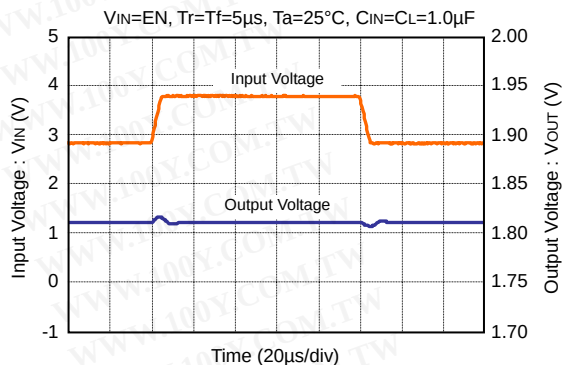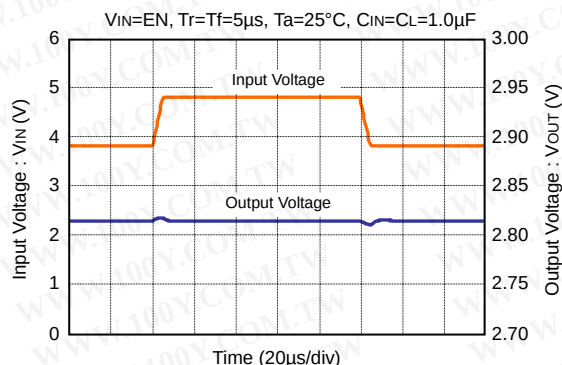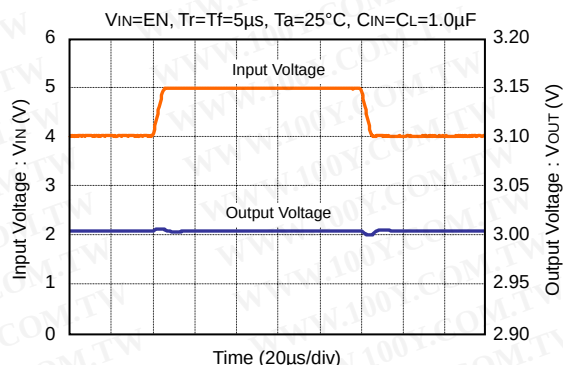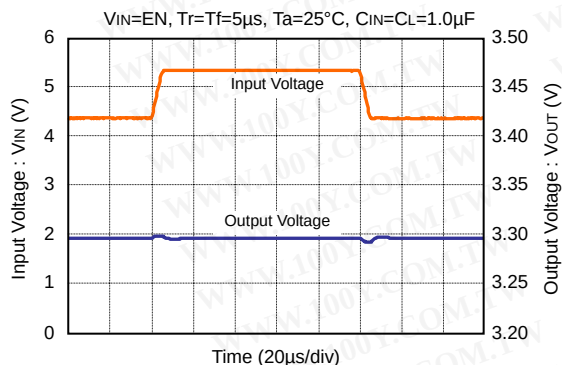TYPICAL CHARACTERISTICS – Input Transient Response ($I_{OUT}=1mA$)● **VRH1202xxx ($V_{OUT}=1.2V$)**● **VRH1802xxx ($V_{OUT}=1.8V$)**● **VRH2801xxx ($V_{OUT}=2.8V$)**● **VRH3001xxx ($V_{OUT}=3.0V$)**● **VRH3301xxx ($V_{OUT}=3.3V$)**

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

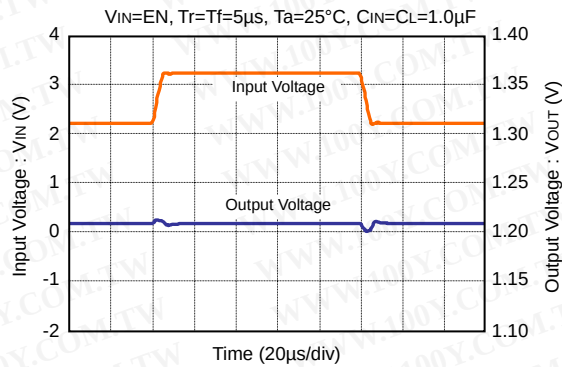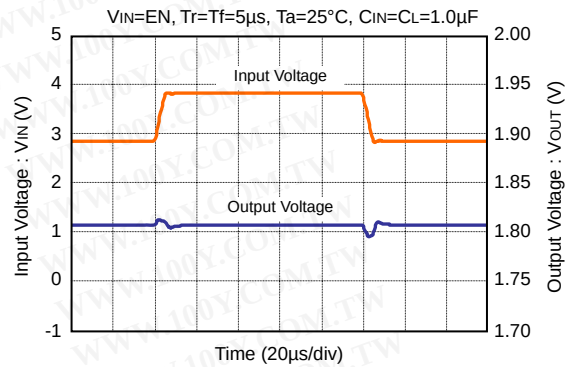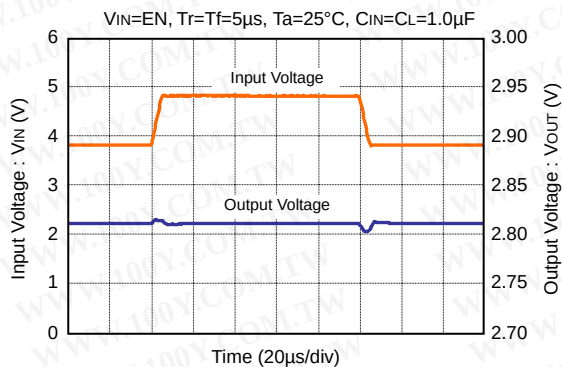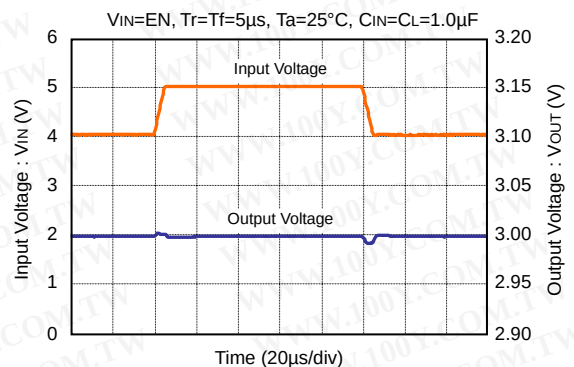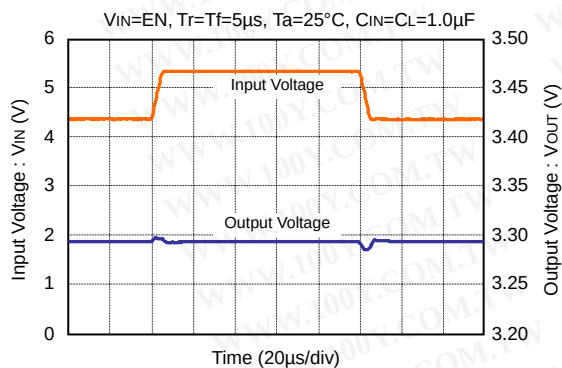TYPICAL CHARACTERISTICS – Input Transient Response ($I_{OUT}=30mA$)● **VRH1202xxx ($V_{OUT}=1.2V$)**● **VRH1802xxx ($V_{OUT}=1.8V$)**● **VRH2801xxx ($V_{OUT}=2.8V$)**● **VRH3001xxx ($V_{OUT}=3.0V$)**● **VRH3301xxx ($V_{OUT}=3.3V$)**


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

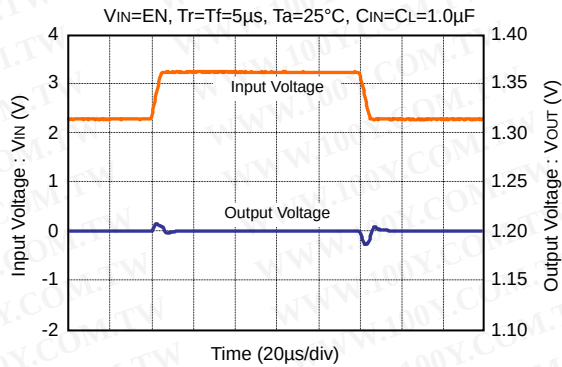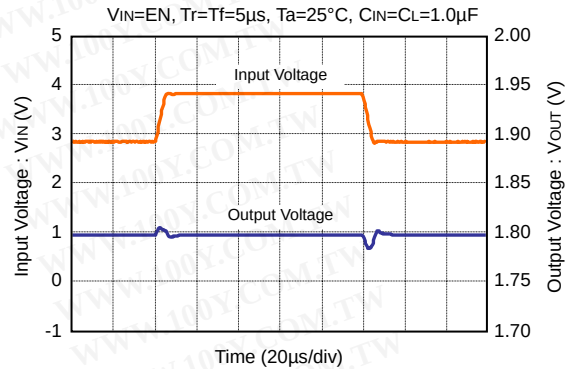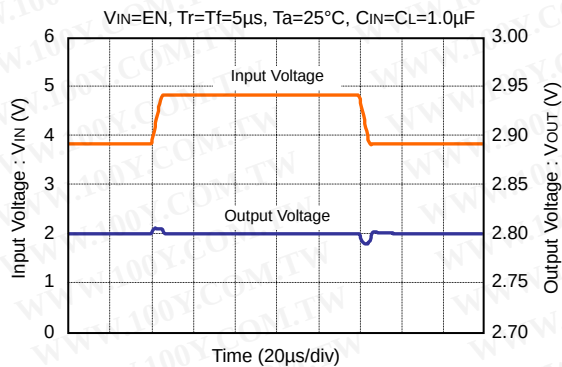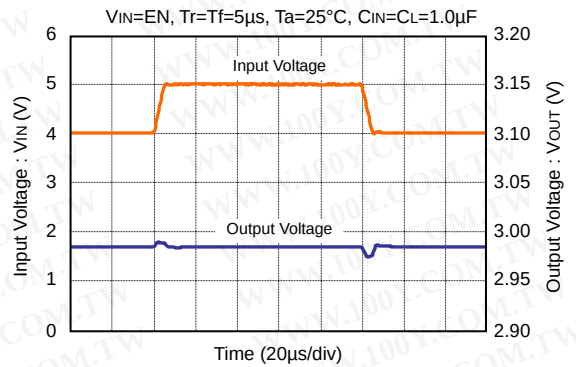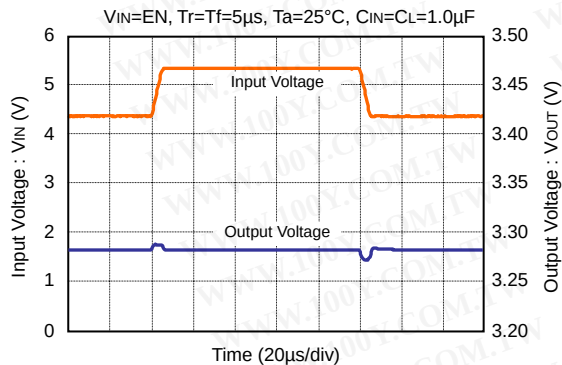TYPICAL CHARACTERISTICS – Input Transient Response ($I_{OUT}=100\text{mA}$)● **VRH1202xxx ($V_{OUT}=1.2\text{V}$)**● **VRH1802xxx ($V_{OUT}=1.8\text{V}$)**● **VRH2801xxx ($V_{OUT}=2.8\text{V}$)**● **VRH3001xxx ($V_{OUT}=3.0\text{V}$)**● **VRH3301xxx ($V_{OUT}=3.3\text{V}$)**


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – Input Rise Time ($I_{OUT}=1mA$)


● VRH1202xxx ($V_{OUT}=1.2V$)

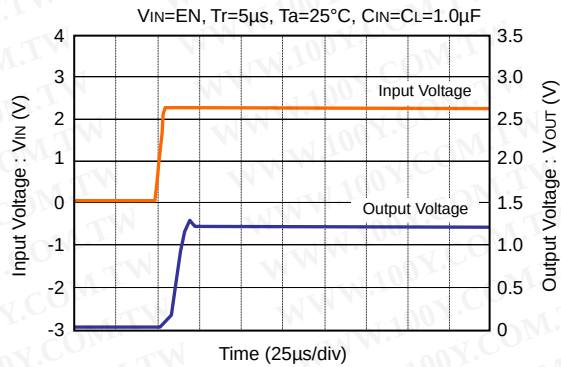


● VRH1802xxx ($V_{OUT}=1.8V$)

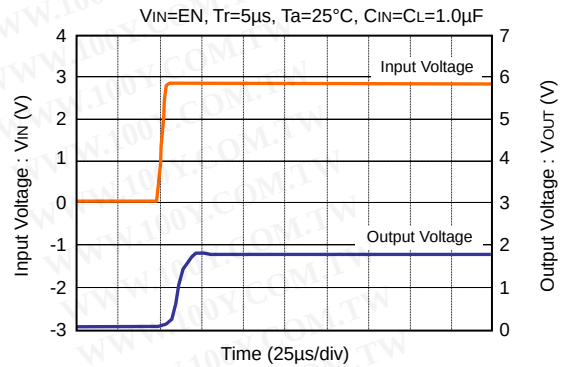


● VRH2801xxx ($V_{OUT}=2.8V$)

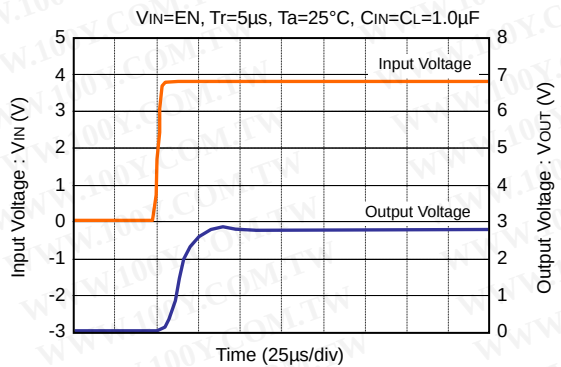

● VRH3001xxx ($V_{OUT}=3.0V$)

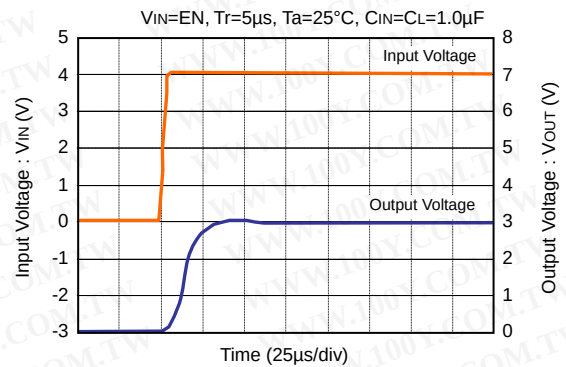


● VRH3301xxx ($V_{OUT}=3.3V$)

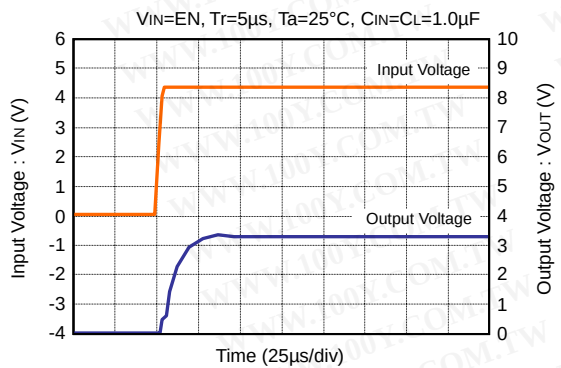


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – Input Rise Time ($I_{OUT}=30mA$)


● VRH1202xxx ($V_{OUT}=1.2V$)

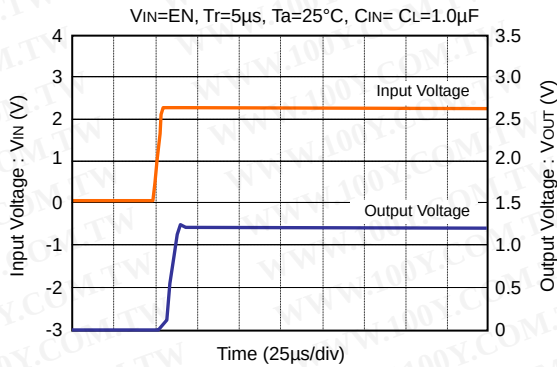


● VRH1802xxx ($V_{OUT}=1.8V$)

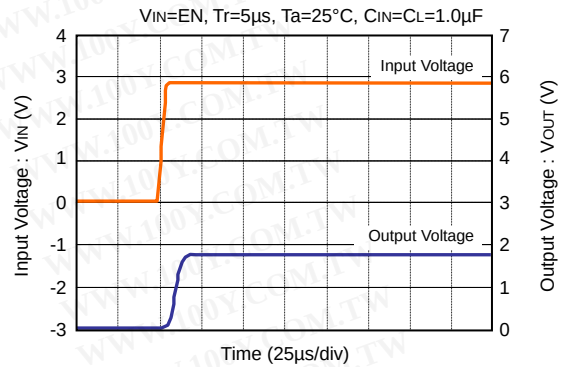


● VRH2801xxx ($V_{OUT}=2.8V$)

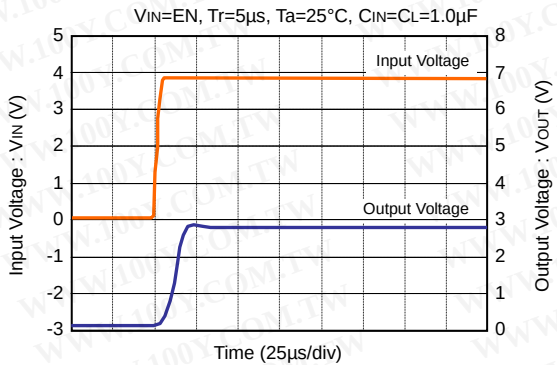






● VRH3001xxx ($V_{OUT}=3.0V$)

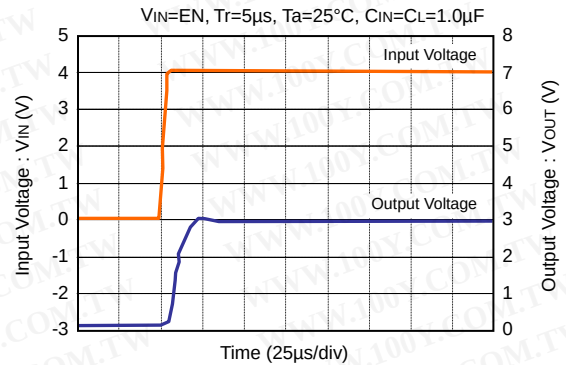

● VRH3301xxx ($V_{OUT}=3.3V$)

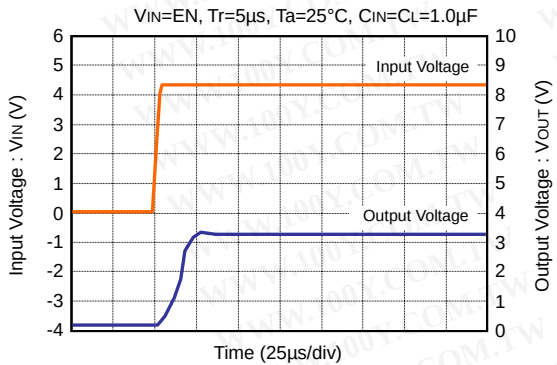


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

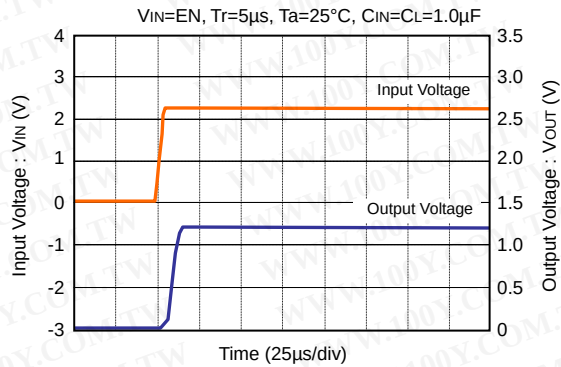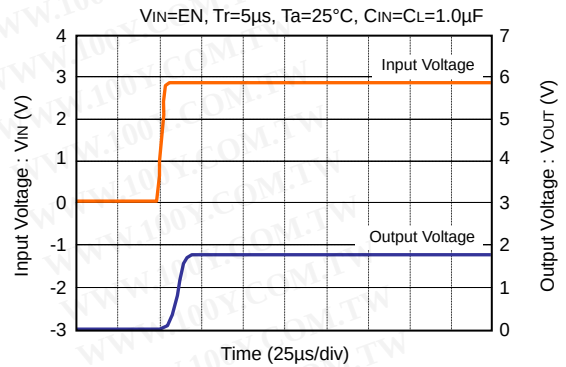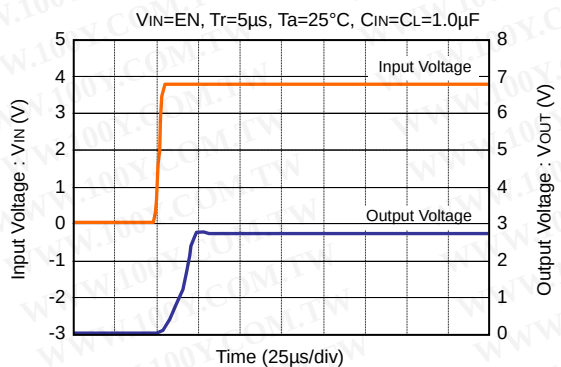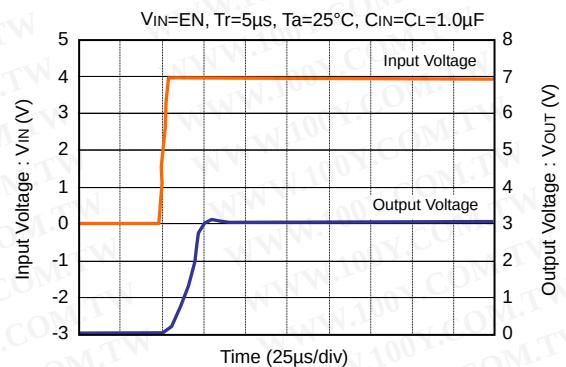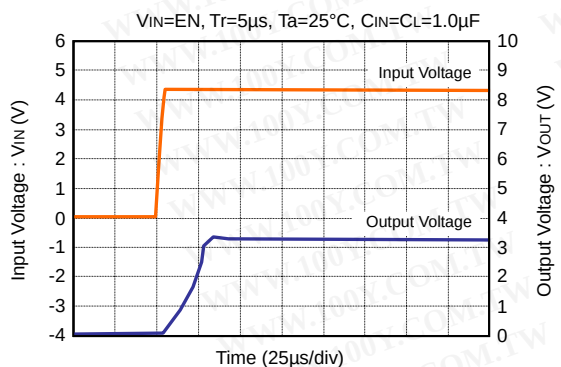TYPICAL CHARACTERISTICS – Input Rise Time ($I_{OUT}=100mA$)● **VRH1202xxx ($V_{OUT}=1.2V$)**● **VRH1802xxx ($V_{OUT}=1.8V$)**● **VRH2801xxx ($V_{OUT}=2.8V$)**● **VRH3001xxx ($V_{OUT}=3.0V$)**● **VRH3301xxx ($V_{OUT}=3.3V$)**


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – EN Rise Time ($I_{OUT}=1mA$)


● VRH1202xxx ($V_{OUT}=1.2V$)

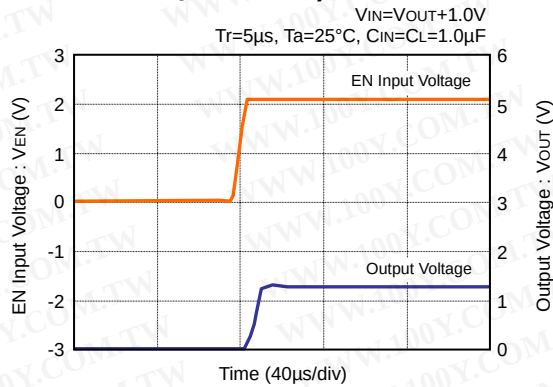


● VRH1802xxx ($V_{OUT}=1.8V$)

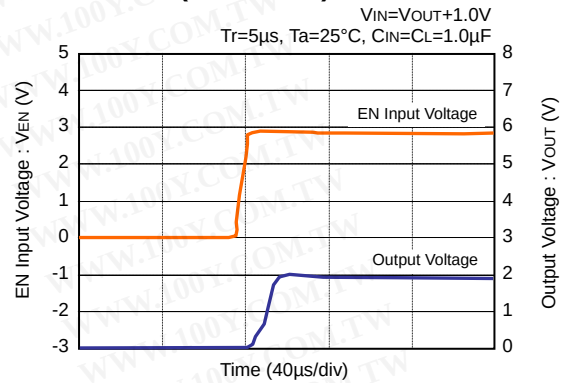


● VRH2801xxx ($V_{OUT}=2.8V$)

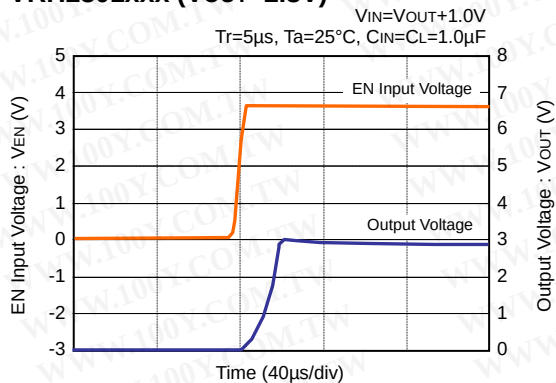

● VRH3001xxx ($V_{OUT}=3.0V$)

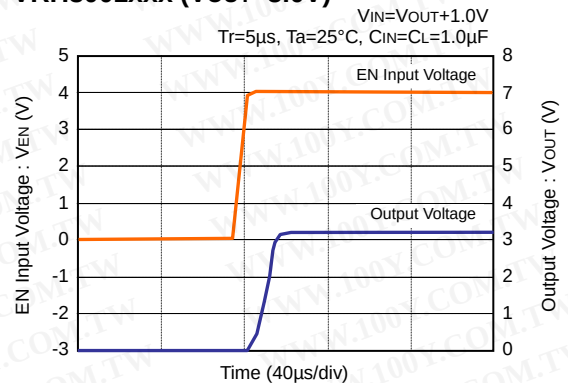


● VRH3301xxx ($V_{OUT}=3.3V$)

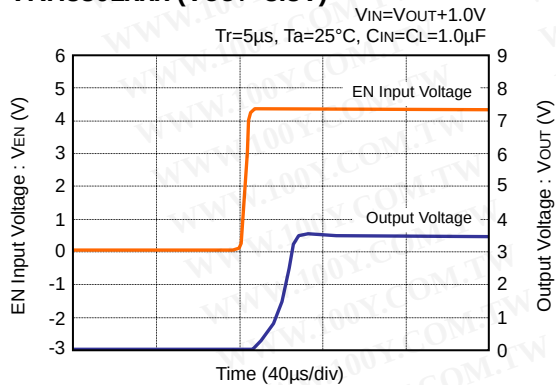


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – EN Rise Time ($I_{OUT}=30mA$)


● VRH1202xxx ($V_{OUT}=1.2V$)

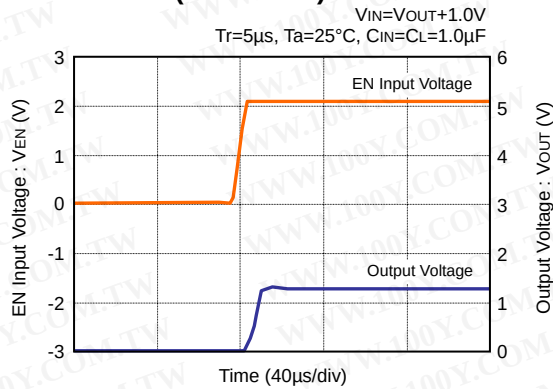


● VRH1802xxx ($V_{OUT}=1.8V$)

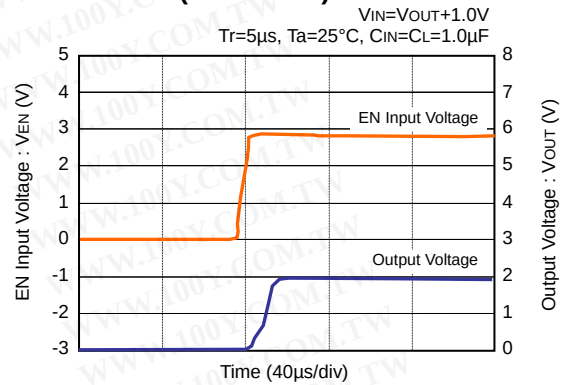


● VRH2801xxx ($V_{OUT}=2.8V$)

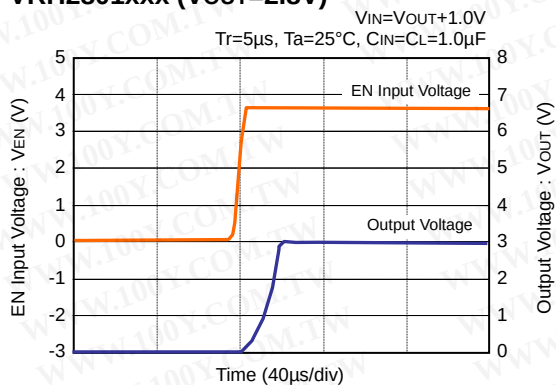






● VRH3001xxx ($V_{OUT}=3.0V$)

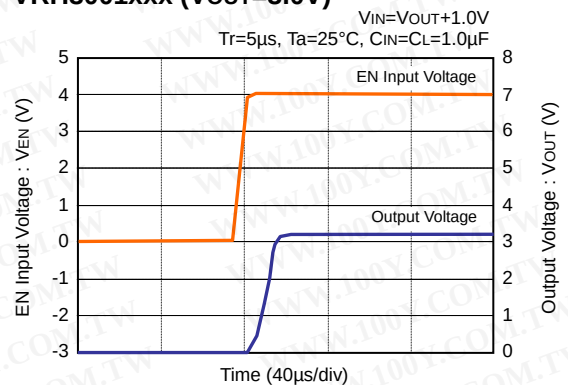

● VRH3301xxx ($V_{OUT}=3.3V$)

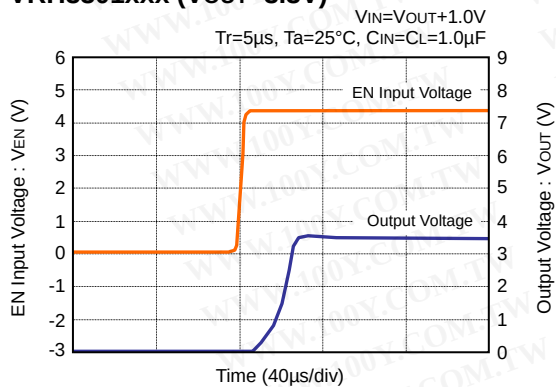


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

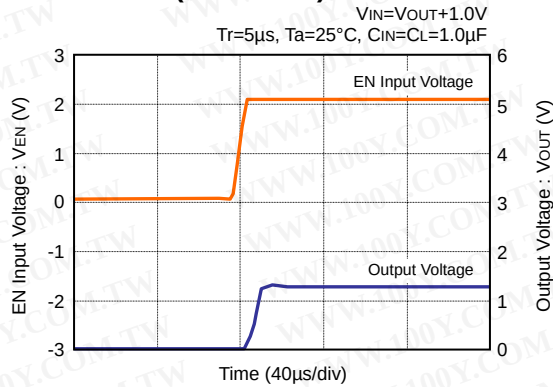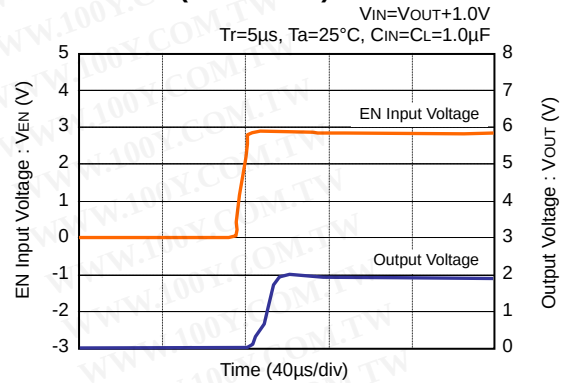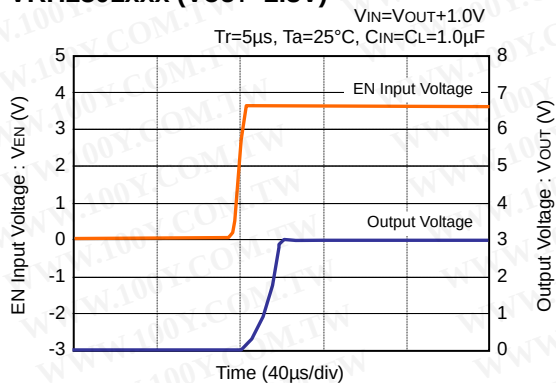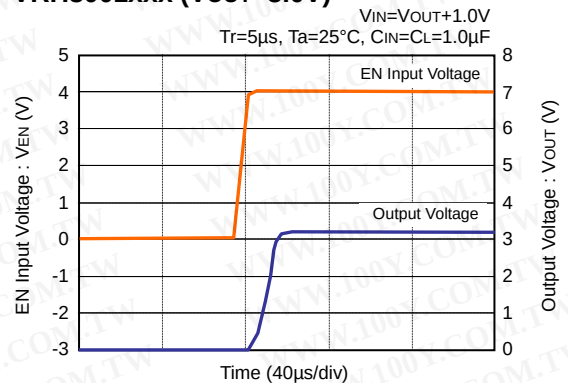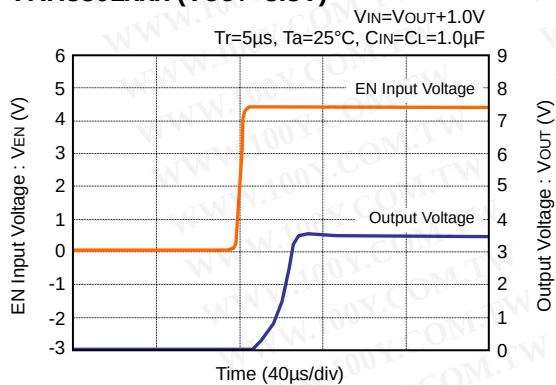TYPICAL CHARACTERISTICS – EN Rise Time ($I_{OUT}=100mA$)● **VRH1202xxx ($V_{OUT}=1.2V$)**● **VRH1802xxx ($V_{OUT}=1.8V$)**● **VRH2801xxx ($V_{OUT}=2.8V$)**● **VRH3001xxx ($V_{OUT}=3.0V$)**● **VRH3301xxx ($V_{OUT}=3.3V$)**


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS – Ripple Rejection Rate


● VRH1202xxx (V_{OUT}=1.2V)

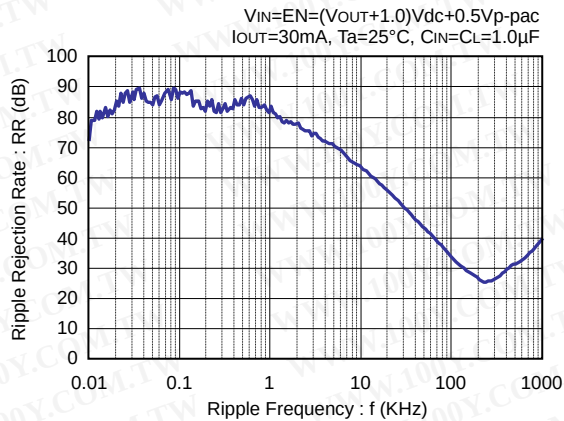


● VRH1802xxx (V_{OUT}=1.8V)

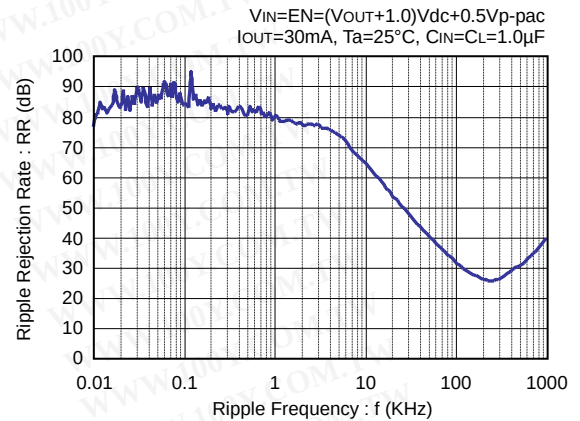


● VRH2801xxx (V_{OUT}=2.8V)

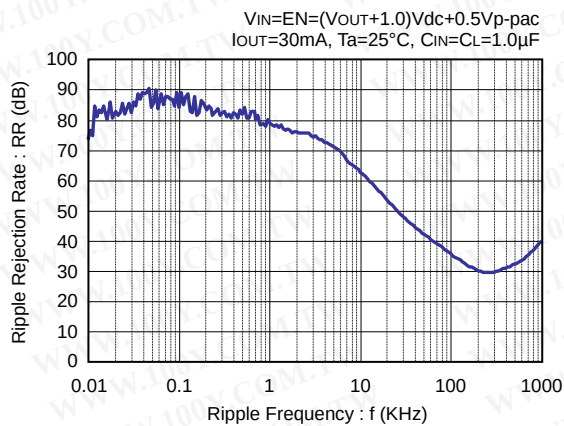

● VRH3001xxx (V_{OUT}=3.0V)



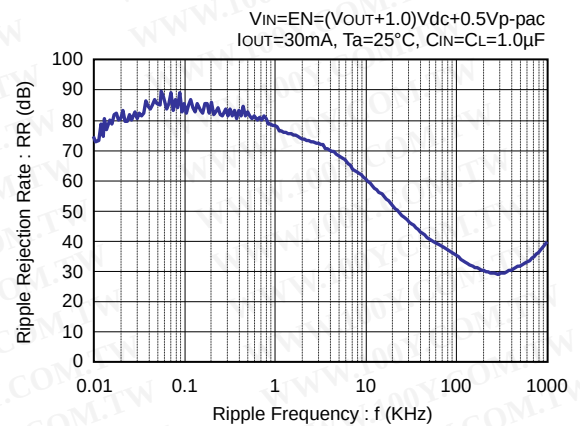


● VRH3301xxx (V_{OUT}=3.3V)

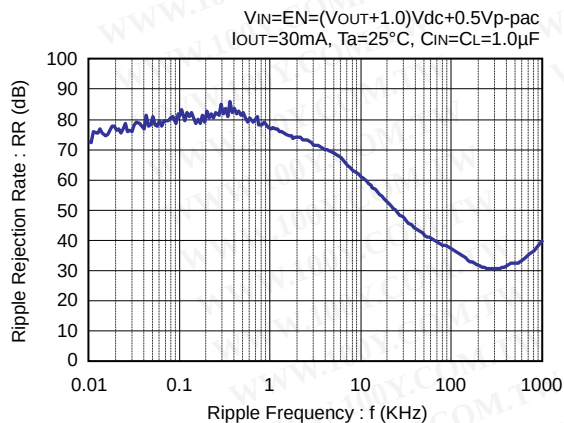

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


PACKAGE DIMENSIONS (SOT-25)

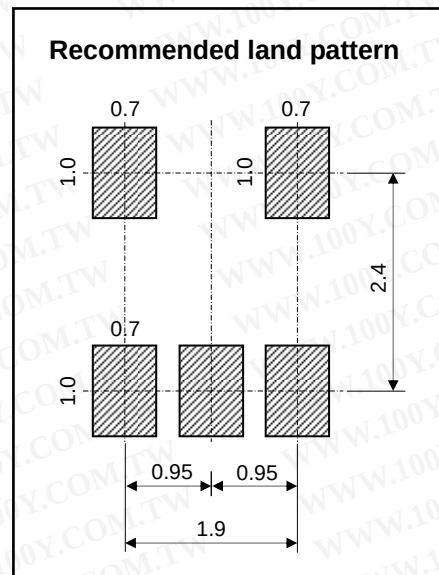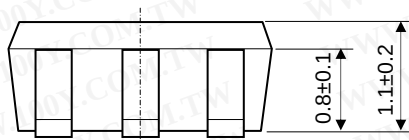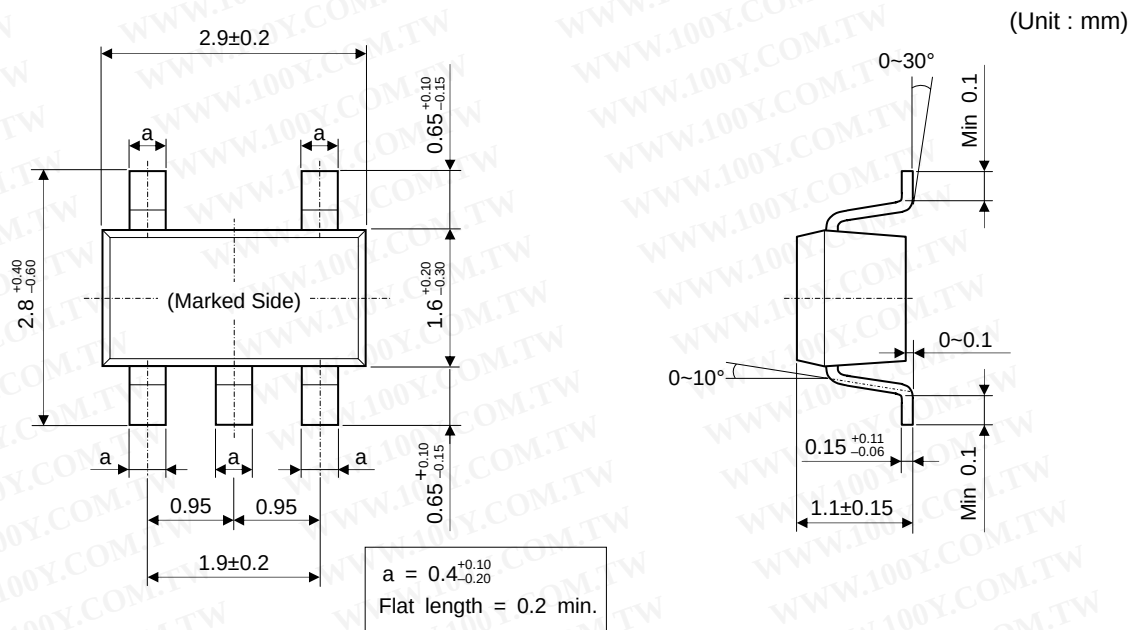

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


TAPING AND LOADING SPECIFICATIONS (SOT-25)

(Unit : mm)

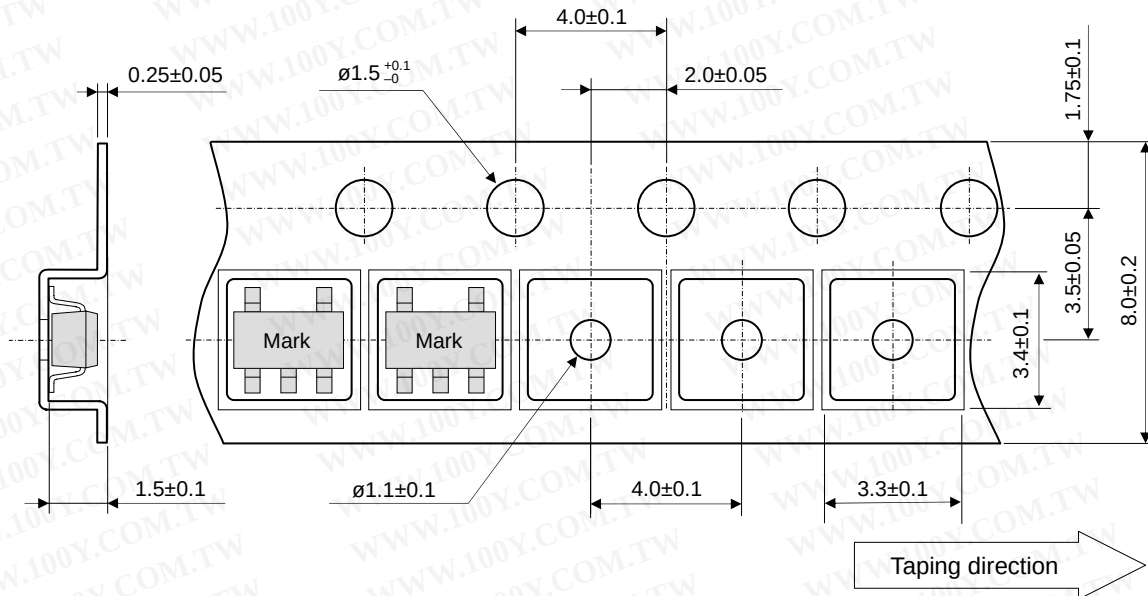





REEL DIMENSIONS (SOT-25)

(Unit : mm)


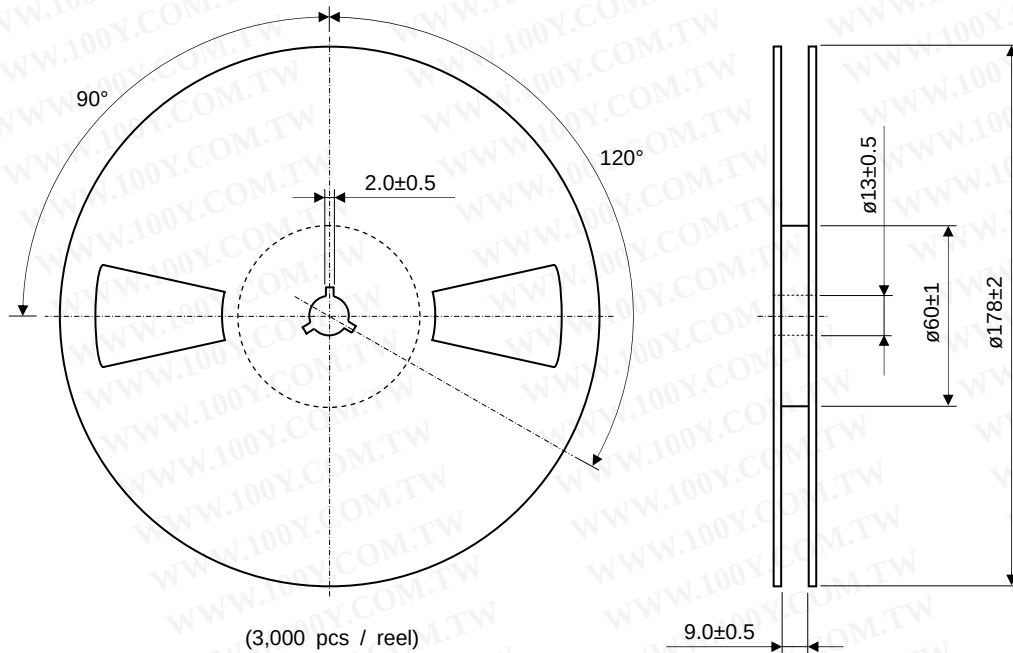


PACKAGE DIMENSIONS (SSOT-25 : A-TYPE)

(Unit : mm)

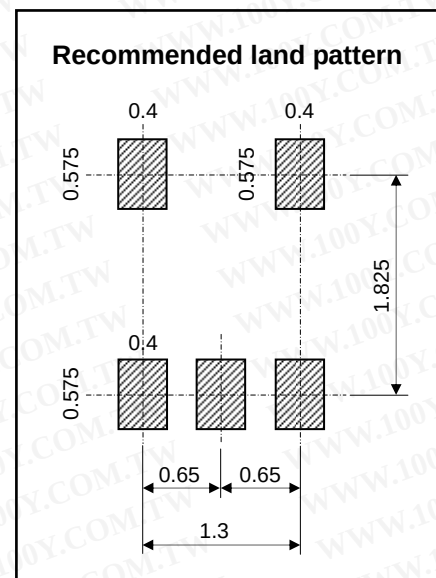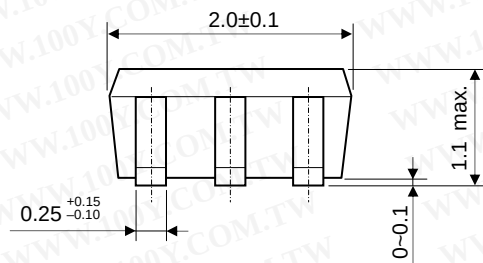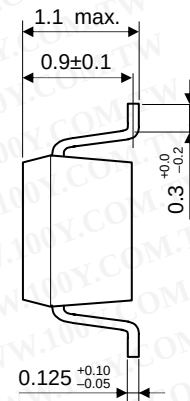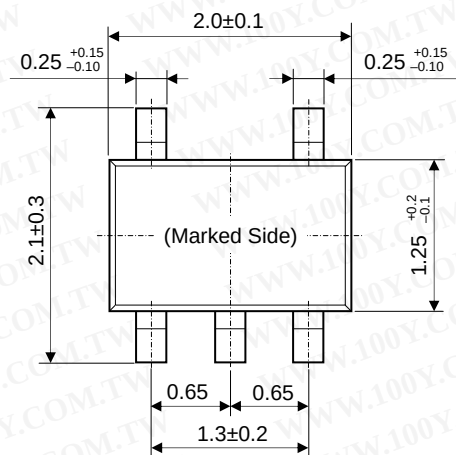


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




PACKAGE DIMENSIONS (LLP-4)

(Unit : mm)

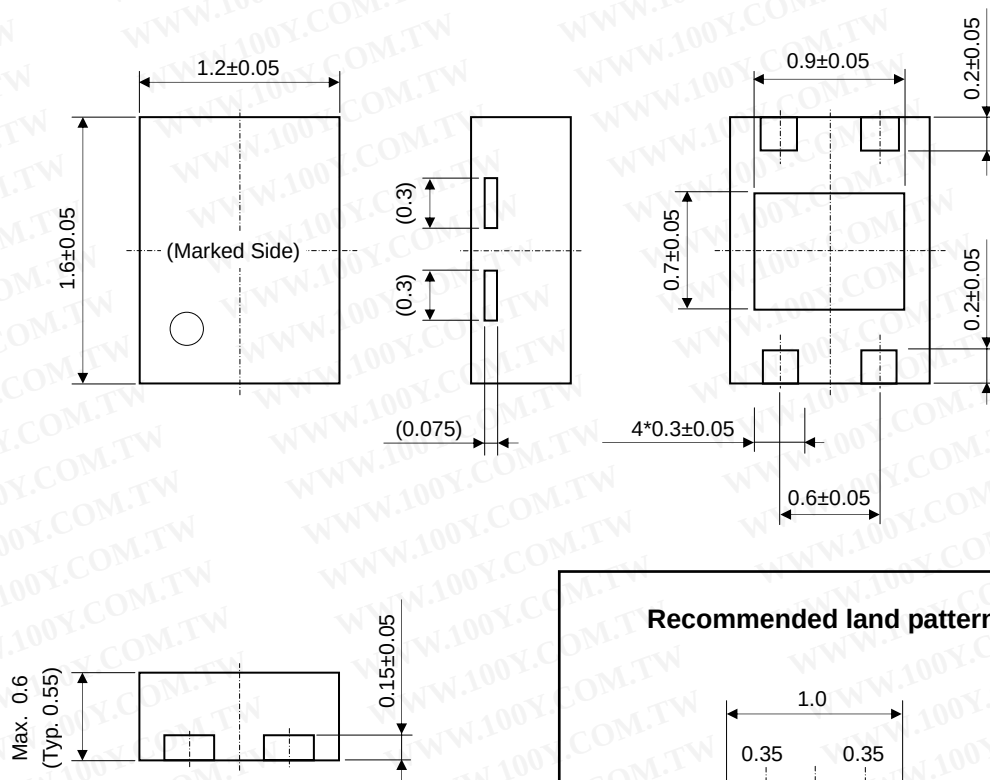


Recommended land pattern

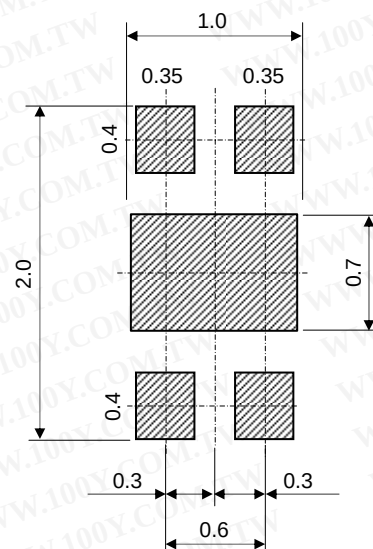

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


TAPING AND LOADING SPECIFICATIONS (LLP-4)

(Unit : mm)

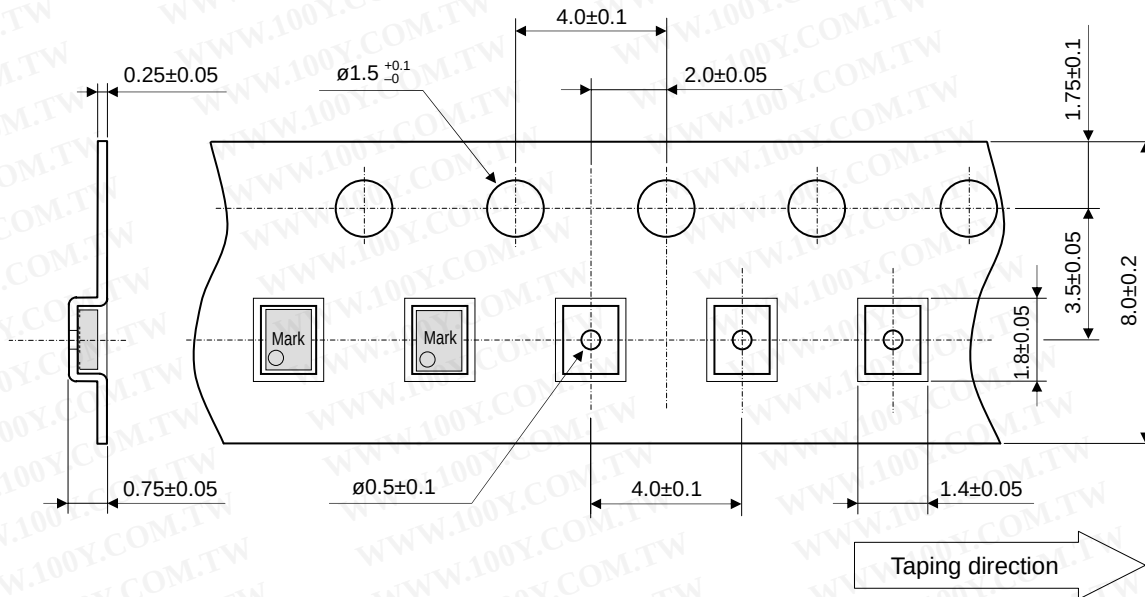


REEL DIMENSIONS (LLP-4)


(Unit : mm)

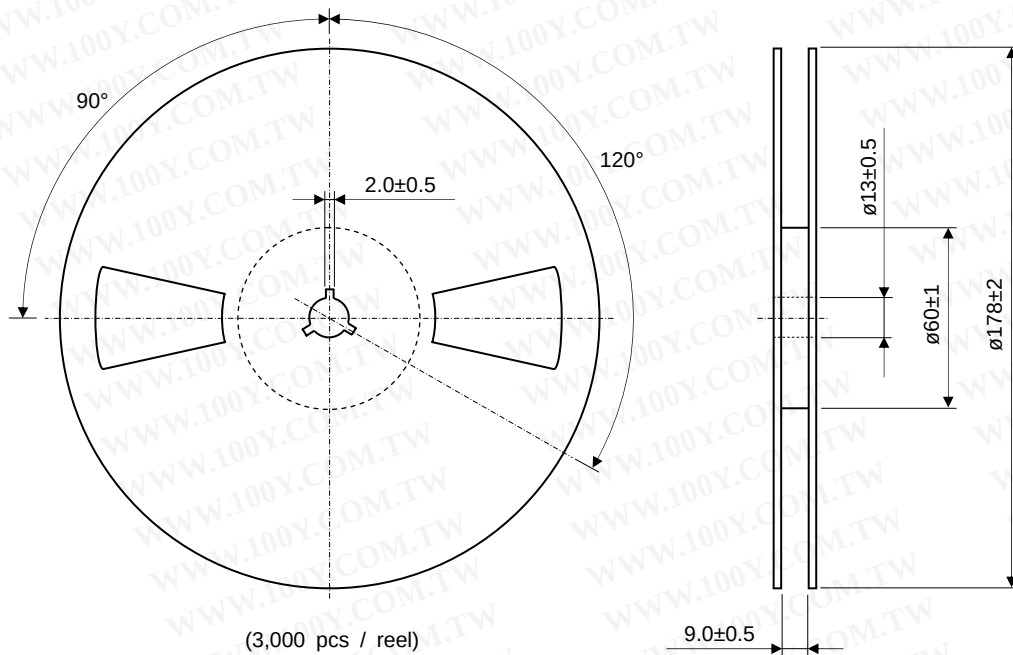

PACKAGE DIMENSIONS (SON-6)

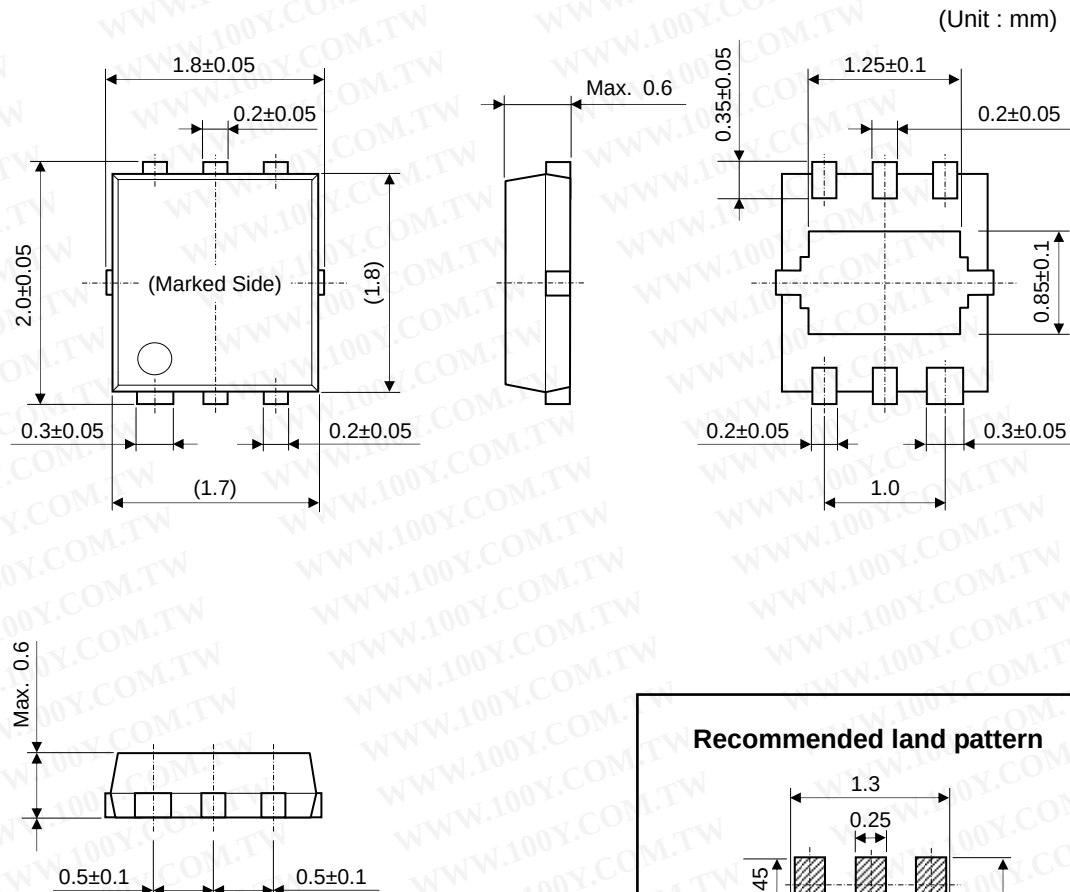

Recommended land pattern

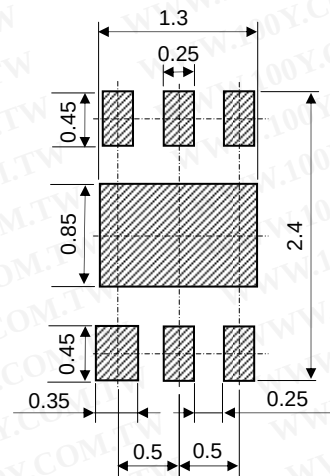

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

