

Description

The GM6250's combine high accuracy with very low power consumption, providing high output current even when the application requires extremely low input-output voltage differential.

The GM6250's include a precision voltage reference, an error correction circuit, over-temperature protection, and a current limited output driver. Fast transient response to load variations provides excellent stability under dynamic load conditions.

The GM6250's come in SOT-23 (150mW), SOT-89 (500mW) and TO-92 packages.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Features

- ◆ Maximum output current 250mA (within maximum power dissipation)
- ◆ Output voltage: from 1.8 V to 6.0V in 0.1V increments
- ◆ Output voltage $\pm 2\%$
- ◆ CMOS low power consumption, typically 1.0 μ A at $V_{OUT} = 5.0V$
- ◆ Input stability typically 0.2% / V
- ◆ Ultra-low dropout voltage 0.38V @ $I_{OUT} = 200mA$ at $V_{OUT} = 5.0V$
- ◆ Small input/ output differential: 0.4V at 160mA ($V_{OUT} = 3.3V$)
- ◆ SOT-23 (150mW), SOT-89 (500mW) and TO-92 packages

Application

Palmtops


Portable Cameras

Video Recorders

Battery Powered Equipment




Reference Voltage Sources

TYPICAL APPLICATION CIRCUITS

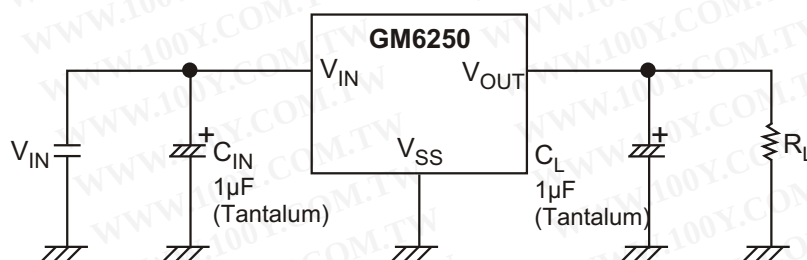

GM6250

◆ MARKING INFORMATION & PIN CONFIGURATIONS (TOP VIEW)



XX = Specific Device Code(EA = GM6250)
 V = Voltage Code
 VV = Voltage Suffix (18=1.8V, 50=5.0V)
 A = Assembly Location
 Y = Year
 WW, W = Work Week

◆ ORDERING INFORMATION (Continued)

Ordering Number	Output Voltage	Voltage Code	Package	Shipping
GM6250-1.5T92B	1.5V		TO-92	1,000 Units/ ESD Bag
GM6250-1.5T92RL	1.5V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-1.5ST23R	1.5V	C	SOT-23	3,000 Units/ Tape and Reel
GM6250-1.5ST89R	1.5V		SOT-89	1,000 Units/ Tape and Reel
GM6250-1.8T92B	1.8V		TO-92	1,000 Units/ ESD Bag
GM6250-1.8T92RL	1.8V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-1.8ST23R	1.8V	E	SOT-23	3,000 Units/ Tape and Reel
GM6250-1.8ST89R	1.8V		SOT-89	1,000 Units/ Tape and Reel
GM6250-2.5T92B	2.5V		TO-92	1,000 Units/ ESD Bag
GM6250-2.5T92RL	2.5V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-2.5ST23R	2.5V	G	SOT-23	3,000 Units/ Tape and Reel
GM6250-2.5ST89R	2.5V		SOT-89	1,000 Units/ Tape and Reel
GM6250-2.7T92B	2.7V		TO-92	1,000 Units/ ESD Bag
GM6250-2.7T92RL	2.7V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-2.7ST23R	2.7V	T	SOT-23	3,000 Units/ Tape and Reel
GM6250-2.7ST89R	2.7V		SOT-89	1,000 Units/ Tape and Reel
GM6250-2.8T92B	2.8V		TO-92	1,000 Units/ ESD Bag
GM6250-2.8T92RL	2.8V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-2.8ST23R	2.8V	H	SOT-23	3,000 Units/ Tape and Reel
GM6250-2.8ST89R	2.8V		SOT-89	1,000 Units/ Tape and Reel
GM6250-2.85T92B	2.85V		TO-92	1,000 Units/ ESD Bag
GM6250-2.85T92RL	2.85V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-2.85ST23R	2.85V	I	SOT-23	3,000 Units/ Tape and Reel
GM6250-2.85ST89R	2.85V		SOT-89	1,000 Units/ Tape and Reel
GM6250-3.0T92B	3.0V		TO-92	1,000 Units/ ESD Bag
GM6250-3.0T92RL	3.0V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-3.0ST23R	3.0V	J	SOT-23	3,000 Units/ Tape and Reel
GM6250-3.0ST89R	3.0V		SOT-89	1,000 Units/ Tape and Reel

* For detail Ordering Number identification, please see last page.

◆ ORDERING INFORMATION (Continued)

Ordering Number	Output Voltage	Voltage Code	Package	Shipping
GM6250-3.2T92B	3.2V		TO-92	1,000 Units/ ESD Bag
GM6250-3.2T92RL	3.2V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-3.2ST23R	3.2V	U	SOT-23	3,000 Units/ Tape and Reel
GM6250-3.2ST89R	3.2V		SOT-89	1,000 Units/ Tape and Reel
GM6250-3.3T92B	3.3V		TO-92	1,000 Units/ ESD Bag
GM6250-3.3T92RL	3.3V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-3.3ST23R	3.3V	K	SOT-23	3,000 Units/ Tape and Reel
GM6250-3.3ST89R	3.3V		SOT-89	1,000 Units/ Tape and Reel
GM6250-3.5T92B	3.5V		TO-92	1,000 Units/ ESD Bag
GM6250-3.5T92RL	3.5V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-3.5ST23R	3.5V	V	SOT-23	3,000 Units/ Tape and Reel
GM6250-3.5ST89R	3.5V		SOT-89	1,000 Units/ Tape and Reel
GM6250-3.6T92B	3.6V		TO-92	1,000 Units/ ESD Bag
GM6250-3.6T92RL	3.6V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-3.6ST23R	3.6V	L	SOT-23	3,000 Units/ Tape and Reel
GM6250-3.6ST89R	3.6V		SOT-89	1,000 Units/ Tape and Reel
GM6250-4.0T92B	4.0V		TO-92	1,000 Units/ ESD Bag
GM6250-4.0T92RL	4.0V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-4.0ST23R	4.0V	M	SOT-23	3,000 Units/ Tape and Reel
GM6250-4.0ST89R	4.0V		SOT-89	1,000 Units/ Tape and Reel
GM6250-4.4T92B	4.4V		TO-92	1,000 Units/ ESD Bag
GM6250-4.4T92RL	4.4V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-4.4ST23R	4.4V	W	SOT-23	3,000 Units/ Tape and Reel
GM6250-4.4ST89R	4.4V		SOT-89	1,000 Units/ Tape and Reel
GM6250-4.5T92B	4.5V		TO-92	1,000 Units/ ESD Bag
GM6250-4.5T92RL	4.5V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-4.5ST23R	4.5V	N	SOT-23	3,000 Units/ Tape and Reel
GM6250-4.5ST89R	4.5V		SOT-89	1,000 Units/ Tape and Reel
GM6250-5.0T92B	5.0V		TO-92	1,000 Units/ ESD Bag
GM6250-5.0T92RL	5.0V		TO-92	2,000 Units/ Ammo Pack (Tape)
GM6250-5.0ST23R	5.0V	Q	SOT-23	3,000 Units/ Tape and Reel
GM6250-5.0ST89R	5.0V		SOT-89	1,000 Units/ Tape and Reel

* For detail Ordering Number identification, please see last page.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


◆ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	12	V
Output Current		I_{OUT}	500	mA
Output Voltage		V_{OUT}	$V_{SS} - 0.3 \sim V_{IN} + 0.3$	V
Continuous Total Power Dissipation	SOT - 23	P_D	150	mW
	SOT - 89		500	
	TO - 92		300	
Operating Ambient Temperature		T_{opr}	-30 ~ +80	°C
Storage Temperature		T_{stg}	-40 ~ +125	°C
Maximum Junction Temperature		T_J	150	°C

◆ Thermal Information

PARAMETER		Maximum	Unit
Thermal Resistance $R_{\theta jc}$	SOT-89	100	°C/ W
Thermal Resistance $R_{\theta ja}$		300	°C/ W

◆ BLOCK DIAGRAM

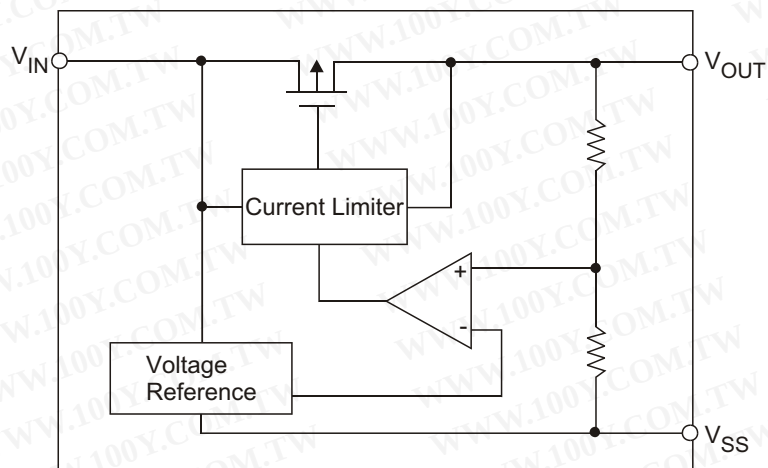

◆ **ELECTRICAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Circuit
Output Voltage	GM6250-1.8V	$V_{OUT}(E)^{(\text{Note } 2)}$ $I_{OUT}=40\text{mA},$ $V_{IN} > V_{DROD} + V_{OUT}$	1.764	1.800	1.836	V	1
	GM6250-2.5V		2.450	2.500	2.550		
	GM6250-2.7V		2.646	2.700	2.754		
	GM6250-2.8V		2.744	2.800	2.856		
	GM6250-3.0V		2.940	3.000	3.060		
	GM6250-3.2V		3.136	3.200	3.264		
	GM6250-3.3V		3.234	3.300	3.366		
	GM6250-3.5V		3.430	3.500	3.570		
	GM6250-3.6V		3.528	3.600	3.672		
	GM6250-4.0V		3.920	4.000	4.080		
	GM6250-4.4V		4.312	4.400	4.488		
	GM6250-4.5V		4.410	4.500	4.590		
	GM6250-5.0V		4.900	5.000	5.100		
Maximum Output Current	GM6250-1.8V	$V_{IN}=3.0\text{V}, V_{OUT}(E) \geq 1.62\text{V}$	250			mA	1
	GM6250-2.5V	$V_{IN}=4.0\text{V}, V_{OUT}(E) \geq 2.3\text{V}$					
	GM6250-2.7V	$V_{IN}=4.0\text{V}, V_{OUT}(E) \geq 2.43\text{V}$					
	GM6250-2.8V	$V_{IN}=4.0\text{V}, V_{OUT}(E) \geq 2.52\text{V}$					
	GM6250-3.0V	$V_{IN}=4.0\text{V}, V_{OUT}(E) \geq 2.7\text{V}$					
	GM6250-3.2V	$V_{IN}=4.0\text{V}, V_{OUT}(E) \geq 2.88\text{V}$					
	GM6250-3.3V	$V_{IN}=4.0\text{V}, V_{OUT}(E) \geq 2.97\text{V}$					
	GM6250-3.5V	$V_{IN}=5.0\text{V}, V_{OUT}(E) \geq 3.15\text{V}$					
	GM6250-3.6V	$V_{IN}=5.0\text{V}, V_{OUT}(E) \geq 3.24\text{V}$					
	GM6250-4.0V	$V_{IN}=5.0\text{V}, V_{OUT}(E) \geq 3.6\text{V}$					
	GM6250-4.4V	$V_{IN}=6.0\text{V}, V_{OUT}(E) \geq 3.96\text{V}$					
	GM6250-4.5V	$V_{IN}=6.0\text{V}, V_{OUT}(E) \geq 4.05\text{V}$					
	GM6250-5.0V	$V_{IN}=6.0\text{V}, V_{OUT}(E) \geq 4.5\text{V}$					

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

◆ ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Circuit
Load Stability	GM6250-1.8V	$V_{IN}=2.8\text{V}, 1\text{mA} \leq I_{OUT} \leq 60\text{mA}$		45	90	mV	1
	GM6250-2.5V	$V_{IN}=3.5\text{V}, 1\text{mA} \leq I_{OUT} \leq 80\text{mA}$		45	90		
	GM6250-2.7V	$V_{IN}=3.7\text{V}, 1\text{mA} \leq I_{OUT} \leq 80\text{mA}$		45	90		
	GM6250-2.8V	$V_{IN}=3.8\text{V}, 1\text{mA} \leq I_{OUT} \leq 80\text{mA}$		45	90		
	GM6250-3.0V	$V_{IN}=4.0\text{V}, 1\text{mA} \leq I_{OUT} \leq 80\text{mA}$		45	90		
	GM6250-3.2V	$V_{IN}=4.2\text{V}, 1\text{mA} \leq I_{OUT} \leq 80\text{mA}$		45	90		
	GM6250-3.3V	$V_{IN}=4.3\text{V}, 1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		45	90		
	GM6250-3.5V	$V_{IN}=4.5\text{V}, 1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		45	90		
	GM6250-3.6V	$V_{IN}=4.6\text{V}, 1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		45	90		
	GM6250-4.0V	$V_{IN}=5.0\text{V}, 1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		40	80		
	GM6250-4.4V	$V_{IN}=5.4\text{V}, 1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		40	80		
	GM6250-4.5V	$V_{IN}=4.5\text{V}, 1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		40	80		
	GM6250-5.0V	$V_{IN}=6.0\text{V}, 1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		40	80		
Input - Output Voltage Differential (Note 3)	GM6250-1.8V	Vdif1	$I_{OUT} = 60\text{mA}$	180	360	mV	1
		Vdif2	$I_{OUT} = 160\text{mA}$	900	1300		
	GM6250-2.5V	Vdif1	$I_{OUT} = 80\text{mA}$	180	360		
		Vdif2	$I_{OUT} = 160\text{mA}$	550	850		
	GM6250-2.7V	Vdif1	$I_{OUT} = 80\text{mA}$	180	360		
		Vdif2	$I_{OUT} = 160\text{mA}$	400	700		
	GM6250-2.8V	Vdif1	$I_{OUT} = 80\text{mA}$	180	360		
		Vdif2	$I_{OUT} = 160\text{mA}$	400	700		
	GM6250-3.0V	Vdif1	$I_{OUT} = 80\text{mA}$	180	360		
		Vdif2	$I_{OUT} = 160\text{mA}$	400	700		
	GM6250-3.2V	Vdif1	$I_{OUT} = 80\text{mA}$	180	360		
		Vdif2	$I_{OUT} = 160\text{mA}$	400	700		
	GM6250-3.3V	Vdif1	$I_{OUT} = 100\text{mA}$	170	330		
		Vdif2	$I_{OUT} = 200\text{mA}$	400	630		
	GM6250-3.5V	Vdif1	$I_{OUT} = 100\text{mA}$	120	300		
		Vdif2	$I_{OUT} = 200\text{mA}$	380	600		
	GM6250-3.6V	Vdif1	$I_{OUT} = 100\text{mA}$	120	300		
		Vdif2	$I_{OUT} = 200\text{mA}$	380	600		
	GM6250-4.0V	Vdif1	$I_{OUT} = 100\text{mA}$	170	330		
		Vdif2	$I_{OUT} = 200\text{mA}$	400	630		
	GM6250-4.4V	Vdif1	$I_{OUT} = 100\text{mA}$	120	300		
		Vdif2	$I_{OUT} = 200\text{mA}$	380	600		
	GM6250-4.5V	Vdif1	$I_{OUT} = 100\text{mA}$	120	300		
		Vdif2	$I_{OUT} = 200\text{mA}$	380	600		
	GM6250-5.0V	Vdif1	$I_{OUT} = 100\text{mA}$	120	300		
		Vdif2	$I_{OUT} = 200\text{mA}$	380	600		

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

◆ ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Circuit
Supply Current	I_{SS}	$V_{IN} = 2.8\text{V}$		1.0	2.9	μA	2
		$V_{IN} = 3.5\text{V}$					
		$V_{IN} = 3.7\text{V}$					
		$V_{IN} = 3.8\text{V}$					
		$V_{IN} = 4.0\text{V}$					
		$V_{IN} = 4.2\text{V}$					
		$V_{IN} = 4.3\text{V}$					
		$V_{IN} = 4.5\text{V}$					
		$V_{IN} = 4.6\text{V}$					
		$V_{IN} = 5.0\text{V}$					
		$V_{IN} = 5.4\text{V}$					
		$V_{IN} = 5.5\text{V}$					
		$V_{IN} = 6.0\text{V}$					
Output Current Limit				500		mA	-
Input Stability	$\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$	$I_{OUT} = 40\text{mA}$ $2.8\text{V} \leq V_{IN} \leq 10.0\text{V}$		0.2	0.3	$\%/V$	1
		$I_{OUT} = 40\text{mA}$ $3.5\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $3.7\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $3.8\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $4.0\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $4.2\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $4.3\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $4.5\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $4.6\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $5.0\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $5.4\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $5.5\text{V} \leq V_{IN} \leq 10.0\text{V}$					
		$I_{OUT} = 40\text{mA}$ $6.0\text{V} \leq V_{IN} \leq 10.0\text{V}$					
Input Voltage	V_{IN}				10	V	-
Output Voltage Temperature Characteristics	$\frac{V_{OUT}}{\text{Topr} \cdot V_{OUT}}$	$I_{OUT} = 10\text{mA}$ $-30^\circ\text{C} \leq \text{Topr} \leq 80^\circ\text{C}$		± 100		$\text{ppm}/^\circ\text{C}$	1

Note: 1. $V_{OUT}(T)$ = Specified Output Voltage
 2. $V_{OUT}(E)$ = Effective Output Voltage (the output voltage when " $V_{OUT}(T) + 1.0\text{V}$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value)
 3. $V_{dif} = \{ V_{IN1} (\text{Note 4}) - V_{OUT}(E) \}$
 4. V_{IN1} = The input voltage at the time 98% of $V_{OUT}(E)$ is output (input voltage has been gradually reduced).
 * Output Voltage from 1.8V to 6.0V in 0.1V increments are available

◆ DIRECTIONS FOR USE


Notes on Use

1. Please use this IC within the stipulated absolute maximum ratings as the IC is liable to malfunction outside of such parameters.
2. There is a possibility that oscillation may occur as a result of the impedance present between the power supply and the IC's input. Where impedance is 10 Ω or more, please use a capacitor (C_{IN}) of at least 1 μ F.
With a large output current, operations can be stabilised by increasing capacitor size (C_{IN}). If C_{IN} is small and capacitor size (C_L) is increased, there is a possibility of oscillation due to input impedance. In such cases, operations can be stabilised by either increasing the size of C_{IN} or decreasing the size of C_L .
3. Please ensure that output current (I_{OUT}) is less than $P_d \div (V_{IN} - V_{OUT})$ and does not exceed the stipulated continuous total power dissipation value (P_d) for the package.


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

◆ TEST CIRCUIT

Circuit 1

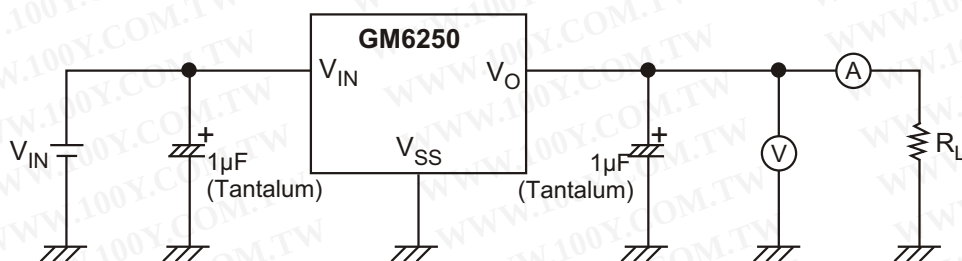

Circuit 2

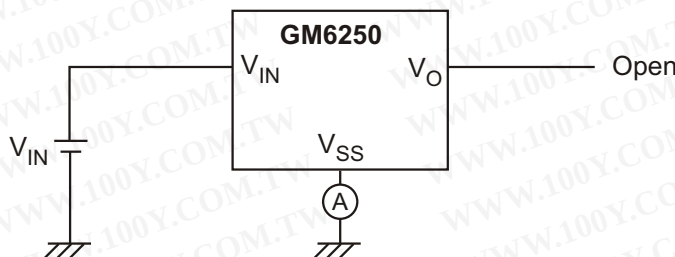

◆ PERFORMANCE CHARACTERISTICS FOR GM6250 - 3.0

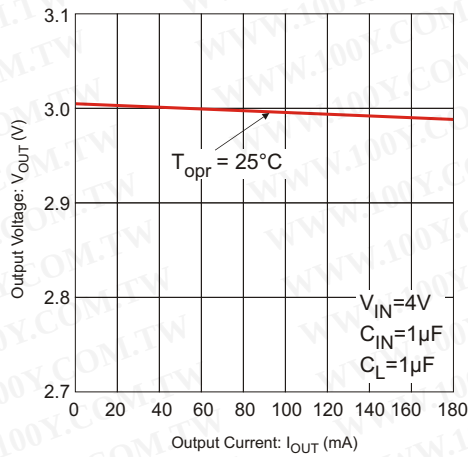


Figure 1: Output Voltage vs. Output Current

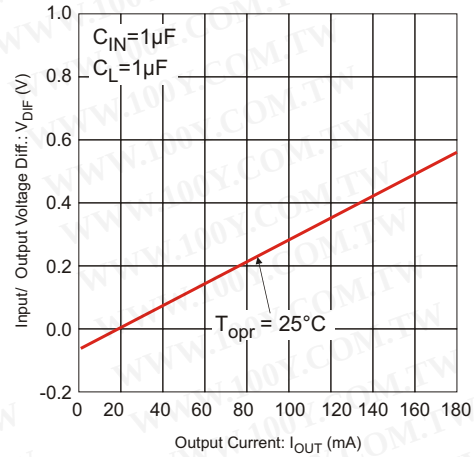


Figure 2: Input/ Output Voltage differential vs. Output Current

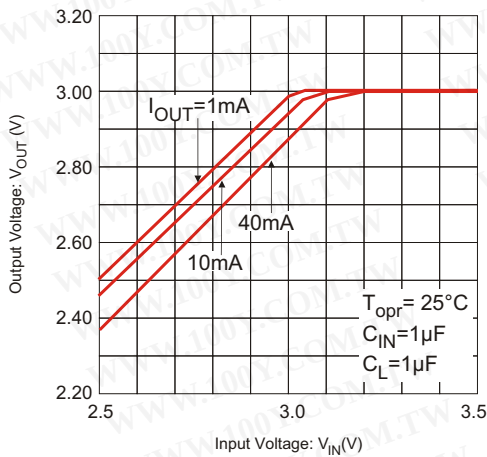


Figure 3: Output Voltage vs. Input voltage

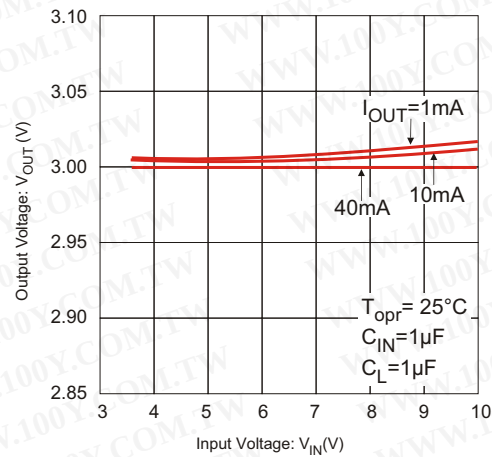


Figure 4: Output Voltage vs. Input voltage

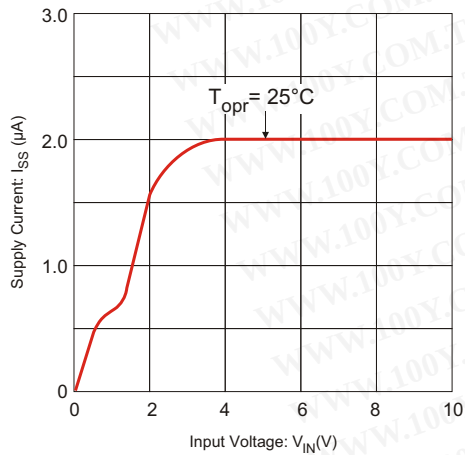


Figure 5: Supply Current vs. Input Voltage

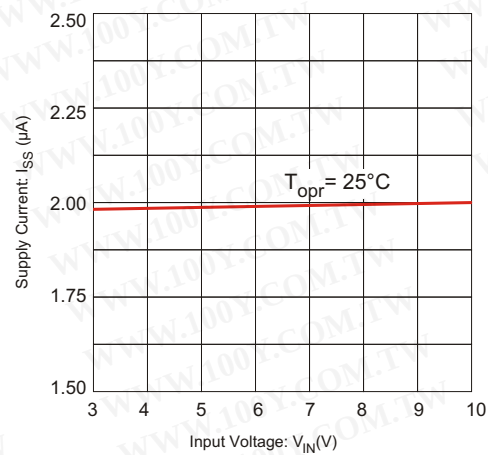


Figure 6: Supply Current vs. Input Voltage

◆ PERFORMANCE CHARACTERISTICS FOR GM6250 - 3.0

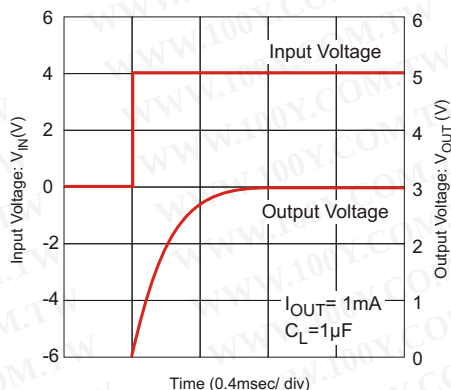


Figure 7: Input Transient Response 1

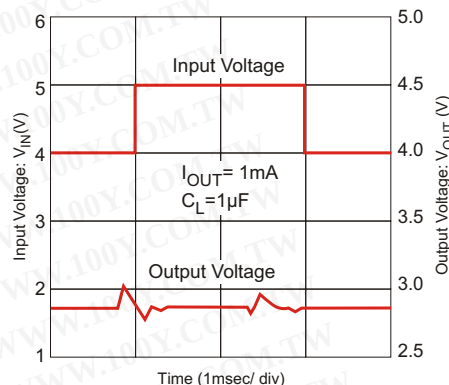


Figure 8: Input Transient Response 2


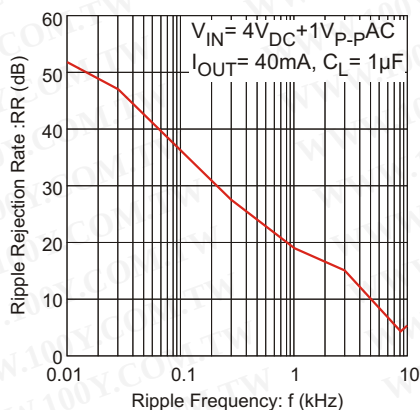


Figure 9: Ripple Rejection Rate


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

◆ TO-92 PACKAGE OUTLINE DIMENSIONS

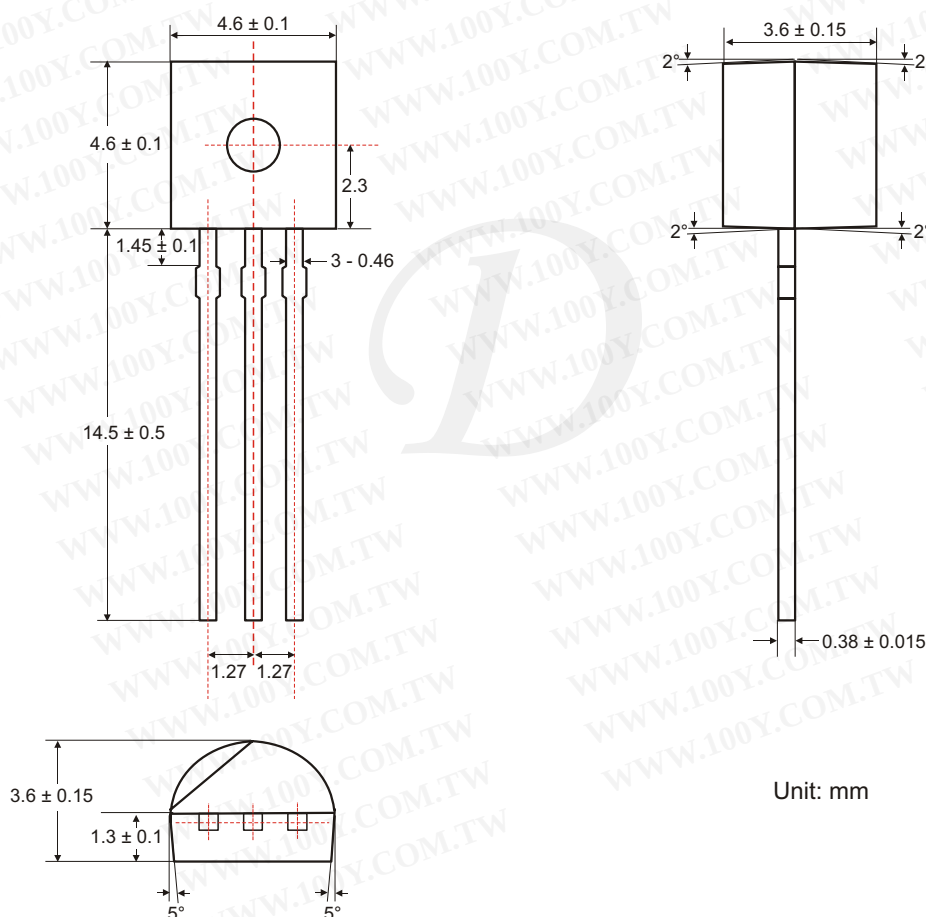


Unit: mm

◆ SOT-89 PACKAGE OUTLINE DIMENSIONS

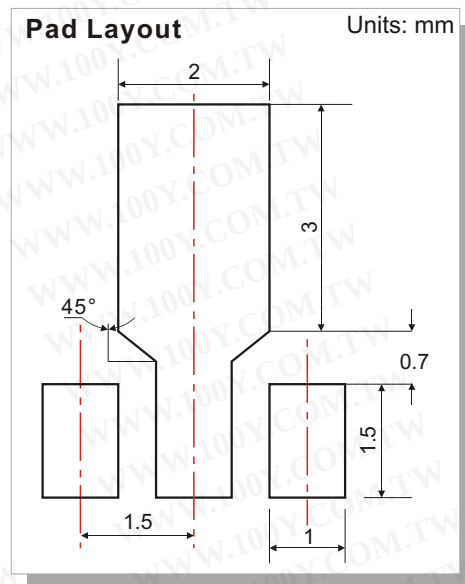


Unit: mm

◆ SOT-23 PACKAGE OUTLINE DIMENSIONS

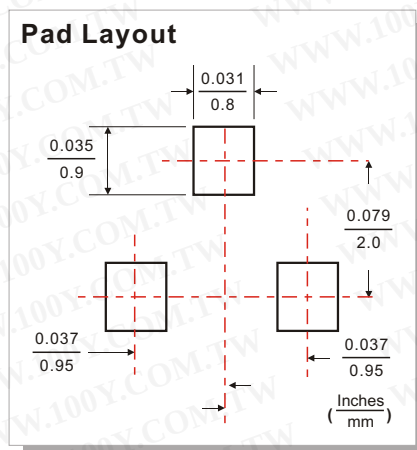

Unit: mm

◆ ORDERING NUMBER

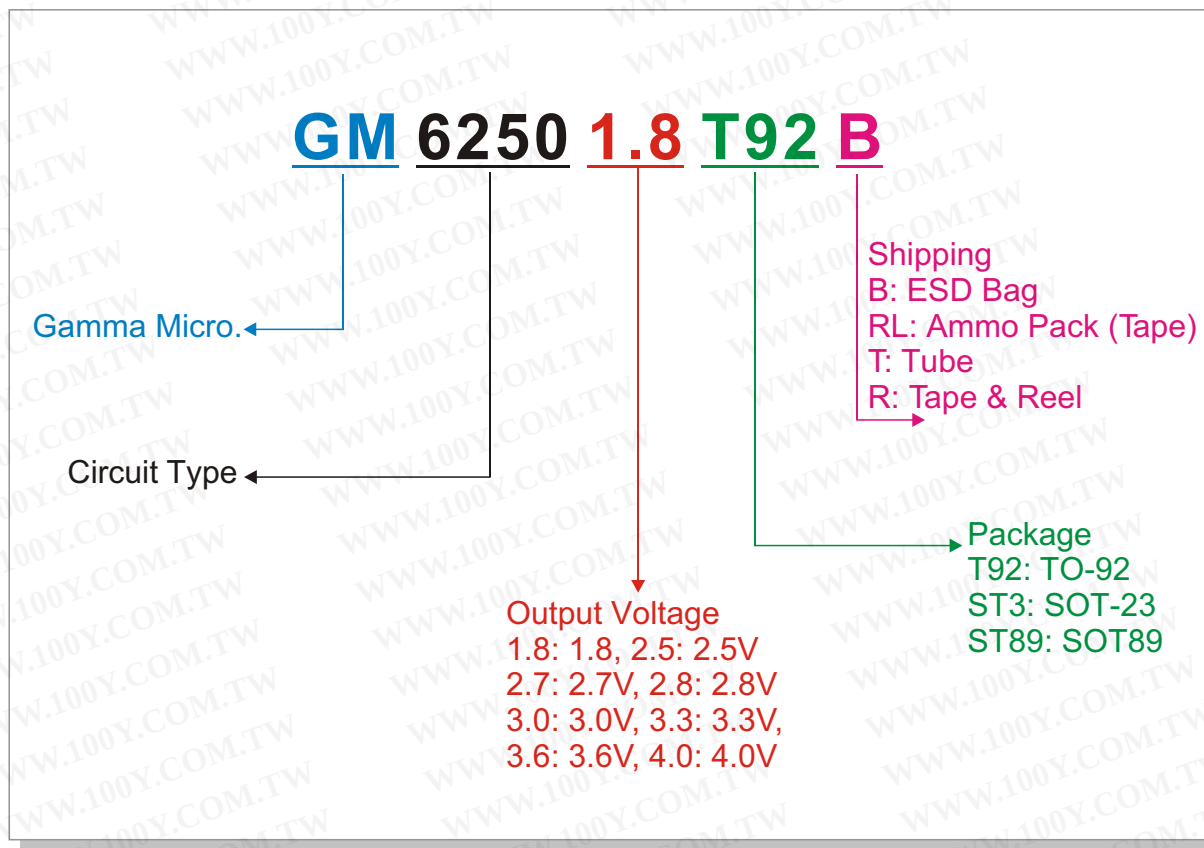

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)