

4-Channel Analog Input Module ±10 V/0-10 V
single-ended (S.E.)

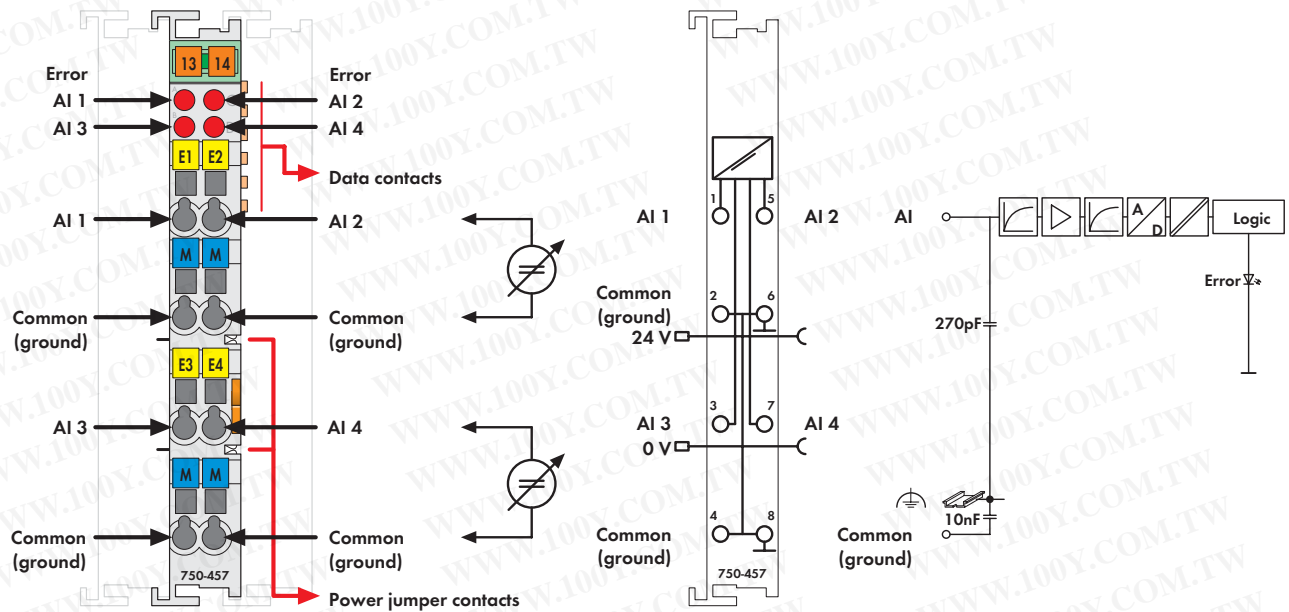


Fig. Series 750 / Technical data see page 28 / Delivery without Mini WSB marker
Series 750 / 753 marking see pages 16 ... 17 / 18 ... 19

The analog input module receives signals with the standardized values ±10 V and 0-10 V.

The input signal is electrically isolated and will be transmitted with a resolution of 12 bits.

The internal system supply is used for the power supply of the module.

The input channels of a module have one common ground potential.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description	Item no.	Pack. unit
4AI ±10V DC S.E.	750-457	10 ¹¹
4AI 0-10V DC S.E.	750-459	10 ¹¹
4AI ±10V DC S.E. (without connector)	753-457	10 ¹¹
4AI 0-10V DC S.E. (without connector)	753-459	10 ¹¹
1) Also available individually		
Accessories	Item no.	Pack. unit
753 Series connector	753-110	25
Coding elements	753-150	100
Miniature WSB quick marking system,		
plain	248-501	5
with marking	see pages 256 ... 257	
Approvals		
Series 750 and 753		
Conformity marking	CE	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
Series 750		
EN 60079-15	I M2 / II 3 GD Ex nA IIC T4	
Marine applications	see "Approvals Overview" in section 1	

Technical Data	
No. of inputs	4
Voltage supply	via system voltage DC/DC
Current consumption (internal)	65 mA
Input voltage (max.)	± 40 V
Signal voltage	± 10 V (750-457, 753-457) 0 V ... 10 V (750-459, 753-459)
Input resistance	> 100 kΩ
Resolution	12 bits
Conversion time (typ.)	10 ms
Measuring error (25 °C)	< ± 0.2 % of the full scale value
Temperature coefficient	< ± 0.01 % / K of the full scale value
Isolation	500 V system/supply
Bit width	4 x 16 bits data 4 x 8 bits control/status (optional)
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm ² ... 2.5 mm ² / AWG 28 ... 14
Stripped lengths (750 / 753 Series)	8 ... 9 mm / 0.33 in 9 ... 10 mm / 0.37 in
Width	12 mm
Weight	51 g
EMC CE-Immunity to interference	acc. to EN 50082-2 (1996)
EMC CE-Emission of interference	acc. to EN 50081-1 (1993)
EMC marine applications -	
Immunity to interference	acc. to Germanischer Lloyd (2003)
EMC marine applications -	
Emission of interference	acc. to Germanischer Lloyd (2003)

4通道 模拟量输入模块 0 - 10 V 单端

包装单位 1 件

RoHS compliant

项目组	15 (I/O系统)
输入数量	4
典型电流消耗 (内部)	60 mA
供电电压	通过系统电压 DC/DC
公共电压 (最大)	DC 35 V
最大输入电压	± 40 V
信号电压	0 - 10 V
输入电阻	> 100 kOhm
分辨率	12 Bit
温度系数	< ± 0.01 % / 满量程 K
典型转换时间	10 ms
认证标记	CE
隔离	500 V 系统/供电
数据大小	4 x 16位 数据; 4 x 8位 控制器/状态 (可选择)
工作温度	0 °C ... + 55 °C
储藏温度	-25 °C ... +85 °C
空气相对湿度	95 %
抗振动	符合 IEC 60068-2-6标准
抗冲击	符合 IEC 60068-2-27标准
保护等级	IP 20
认证	ATEX
最小可接导线截面积 [mm²]	0,08 - 2,5 mm²
最小可接导线截面积 [AWG]	28 - 14 AWG
重量	51 g
颜色	浅灰色
高度	64 mm
高度	2,52 in
厚度	12 mm
厚度	0,472 in
宽度	100 mm
宽度	3,937 in
最小剥线长度	8 mm
最大剥线长度	9 mm
剥线长度	0,33 in
安装	TS 35

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)