




Speciality Magnetic Components
QUALIFIED to ISO 9001:2008

PCB Mounting Hall Effect Current Transformer Type HTP50

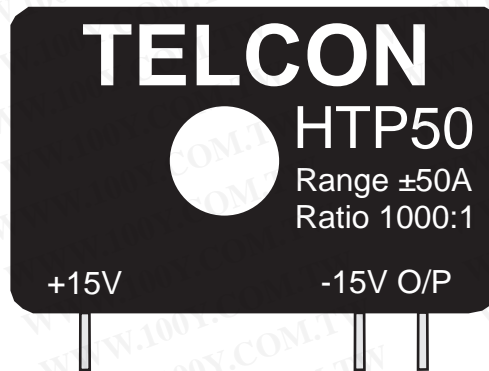

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

The HTP50 is a closed loop Hall Effect Current Transformer suitable for measuring currents up to 50A. The product provides an output current into an external load resistance.

Features

- High Accuracy
- 3 kV Proof Stress
- Fast Response
- Designed in Quality

Applications

- Variable Speed Drives
- UPS Systems
- D.C. Power Supplies
- Low Frequency Current Measurement

Benefits

- Galvanic Isolation
- Ease of assembly
- High Reliability
- Non Invasive
- Overcurrent Protection
- Robotics
- Frequency Inverters
- Power Factor Monitoring

TECHNICAL DATA

Nominal Primary Current	50A
Turns Ratio	1000:1
Nominal Power Supply	$\pm 15V \pm 5\%$
Power Supply Current	16mA per rail + output current
Minimum Load Resistance	75 Ω
Operating Temperature Range	0 to +70°C
Storage Temperature Range	-25°C to +85°C

SPECIFICATION

Linearity	0.1% of nominal primary current.
Limit of Linearity	$\pm 80A$ peak value
Overall Accuracy	0.5% of nominal primary current
Output Zero Adjustment	$< \pm 200\mu A$ at primary current = 0A
Zero Offset/Temperature	$< 5\mu A/^{\circ}C$
Zero Offset/Supply Variation	$< 5\mu A/V$
Coil resistance	52 Ω
Bandwidth (-1dB)	dc to 200kHz min.
di/dt following	$> 200A/\mu s$
Delay Time	0.1 μs
dV/dt Immunity	10kV/ μs
Proof Stress Voltage	3kV a.c., rms, 50Hz for 1 minute, bore to output terminals

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

GENERAL DATA

Weight	17g nominal
Housing	Modified Polyphenylene Oxide
Mounting	Direct mounting to PCB by 3 pins
Signal Sense	Positive output obtained when current flows in direction of arrow
Conductor Temperature	The temperature of the primary conductor should not exceed 100°C
Conductor Position	Optimum dynamic performance is achieved with a single conductor filling the bore

DIMENSIONS

