


# IR860 SMD/BGA REWORK STATION




## Presentation Graphics:

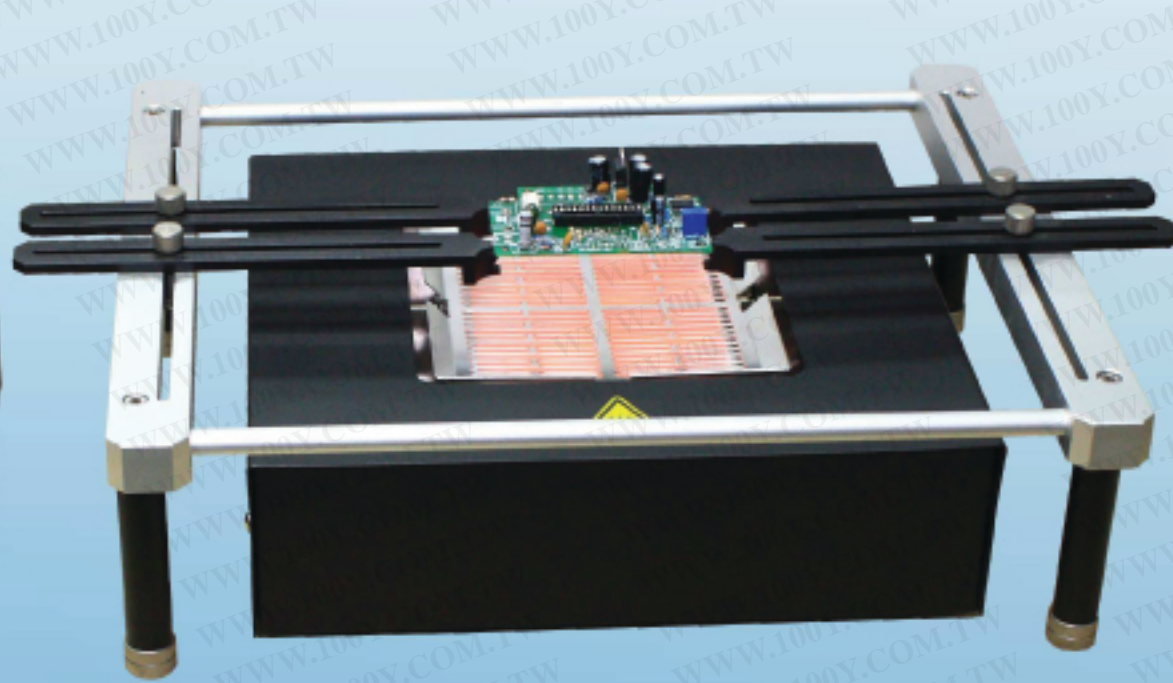

Apply flux and preheat PCB



Heat component with IR handtool

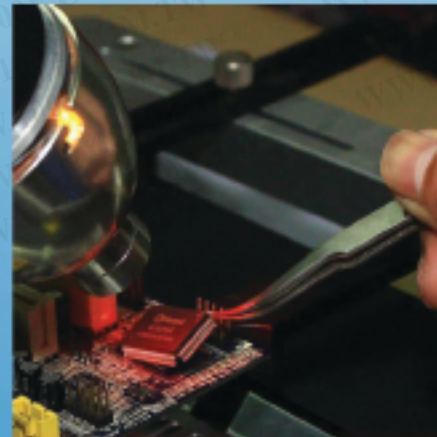

Remove component

## SPECIFICATION:

<b>Input power</b>	100-120Vac 60Hz; 220-240Vac 50Hz	
<b>SOLDER LIGHT</b>	<b>Wattage</b>	15Vac, 150W
	<b>Temperature range</b>	45-350°C 113-662°F
	<b>TIMER</b>	0-900s
<b>PREHEAT</b>	<b>Wattage</b>	650W
	<b>Temperature range</b>	100-350°C 212-662°F

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Specifications for IR860

SOLDERLIGHT CONTROL		
Power rating	220-240Vac 50Hz	100-120Vac 60Hz
Fuse	T2A (Slow type)	T3.15A (Slow type)
Output	15Vac 150W	
IR Lamp temp. range	45°-450° Celsius (113°-842° Fahrenheit)	
Time setting	0 – 900sec	
Size (W*H* D)	170 x 100 x 200mm (6.7" x 3.94" x 7.9")	
Net weight	3.3kg (7.25 lbs.)	

### Specifications for Pre-heater

Pre-heater		
Rating	230Vac	115Vac
Fuse (Delay type)	T5A	T10A
Output	650W	
Temperature range	30°-350° Celsius (86°-662° Fahrenheit)	
Controller Dimensions (W x H x D)	170 x 100 x 200mm (6.7" x 3.9" x 7.9")	
Pre-heater Dimensions (W x H x D)	280 x 90 x 257mm (11" x 3.5" x 10")	
Weight (w/o AC power cord)	2.8Kg (6.2Lbs.)	

### Features of IR860 Front panel

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)