

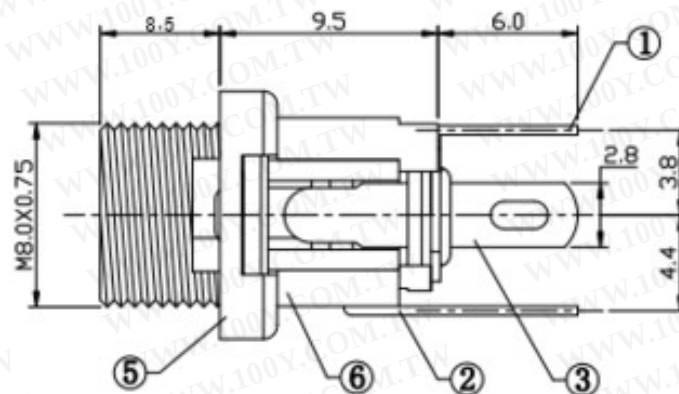


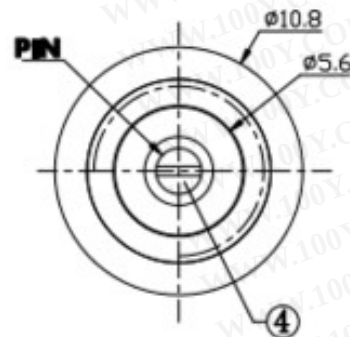

P.C.B LAYOUT VIEW



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SCHEMATIC



PIN	ø2.0	ø2.5
APPD.		

- SPECIFICATION**
- Rating DC 30V 0.5A
 - Contact resistance $\leq 0.03\Omega$
 - Insulation resistance $\geq 100M\Omega$ (DC250V)
 - Withstand voltage 500VAC
 - Insertion and extraction force 3-20N;
 - Life test 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	HOUSING	1	PA66	
5	AXIS	1	BRASS	Ni-Plating
4	SUPPORT	1	H59 BRASS	Ni-Plating
3	SPRING	1	BRONZE	Cu-Sn-Plating
2	CURVE PIECE	1	H62 BRASS	Cu-Sn-Plating
1	FLAT PIECE	1	H62 BRASS	Cu-Sn-Plating
UNIT:MM				
TYPE		MODEL NO.		
DC JACK		DC-025M		
DESIGNER		PAPER NO:		
BY		TOLERANCE		
APPROVED		SCALE		
		PAGE 1 OF 1		
		VER		
		1		