



REV.	DATE	DESCRIPTION
NC	06/21/07	INITIAL RELEASE

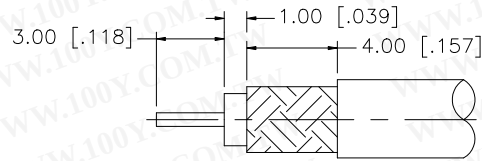

RECOMMENDED
CABLE STRIPPING DIM'S

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

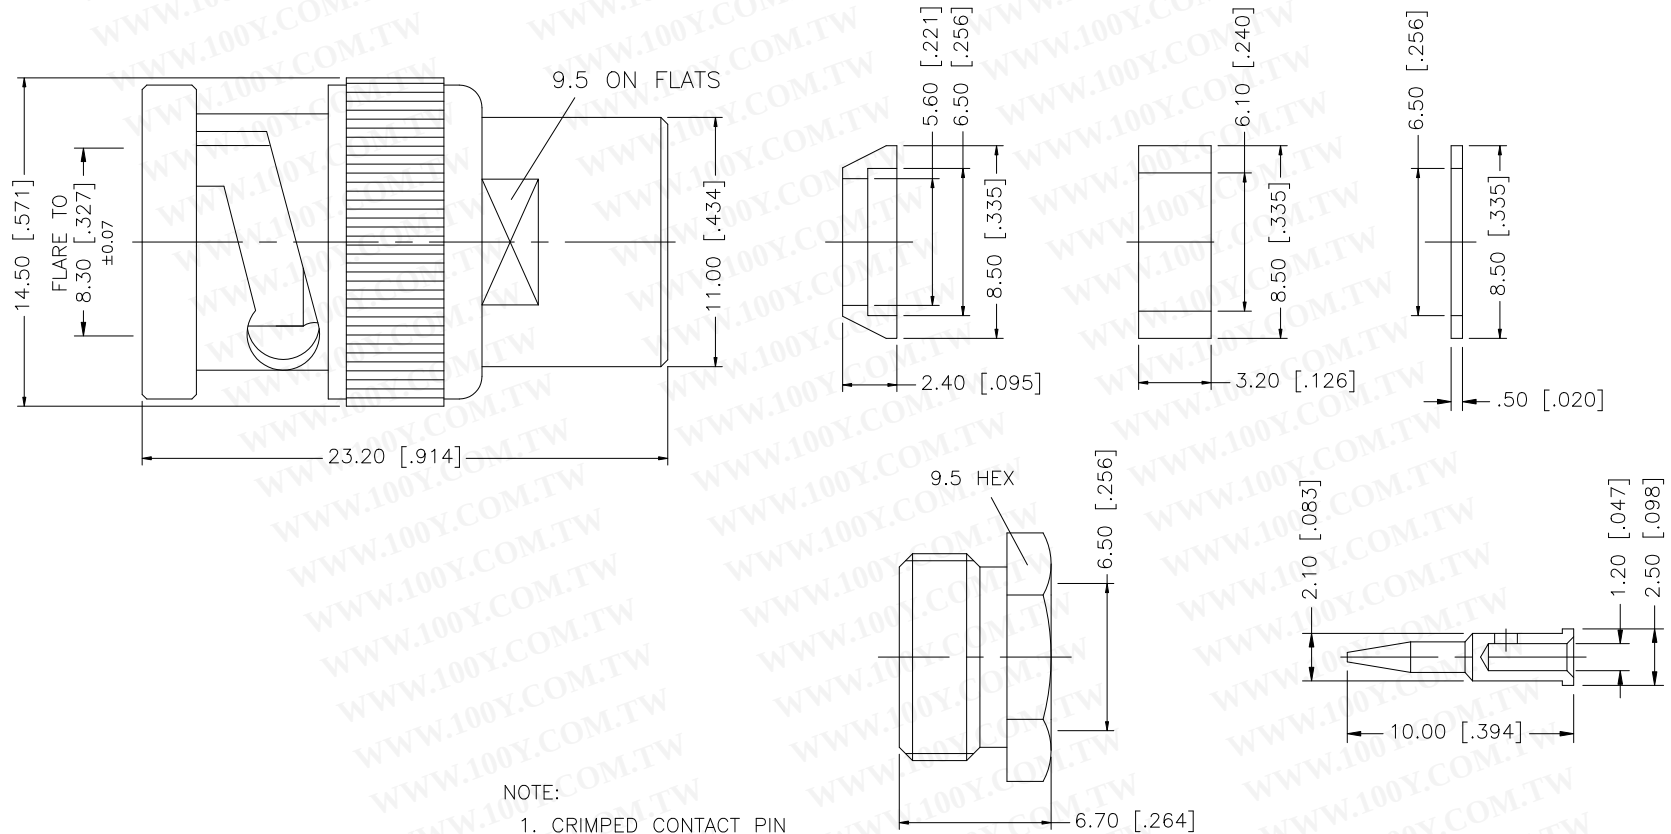

NOTE:

1. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

REV.	DATE	DESCRIPTION
NC	06/21/07	INITIAL RELEASE
8		
7	CONTACT PIN	BRASS
6	HEX NUT	BRASS
5	WASHER	BRASS
4	GASKET	SILICONE
3	TOP HAT	BRASS
2	INSULATOR	DELIRIN
1	BODY/SHELL	BRASS
DESCRIPTION	MATERIAL	FINISH
QTY		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		
0.5 - 8mm ± 0.20mm		
8 - 30mm ± 0.40mm		
30 - 120mm ± 0.50mm		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:		
.020 - .315 ± 0.007"		
.315 - 1.180 ± 0.015"		
1.180 - 4.724 ± 0.020"		
DO NOT SCALE DRAWING		
APPROVALS	DATE	
DRAWN G.R.S.	06/21/07	
CHECKED		
ISSUED		
SHEET 1 OF 1		
CAD FILE	C:/112/112351.DWG	
DWG. NO. 112351.DWG		
REV. NC	SIZE A	SCALE NA

Amphenol Connex

PART DESCRIPTION

BNC CLAMP PLUG
(FOR RG-59/U CABLE)

PART NO.

112351

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112351](#)