

H2D,H3D,H4D

DIN Size W48 x H48mm

- 具有2位數，3位數及4位數計時功能，7段LED數字顯示
- 22種時間範圍(9.9sec~99hrs or 9.99sec~999hrs or 99.99sec~9999hrs)可供選擇
- 可由A/B MODE開關選擇輸出2組限時接點(2C)或1組限時接點1組瞬時接點(1A1C)
- 可提供停電記憶功能



規格特性

尺 寸		48H x 48W x 98D			
安裝與其底座		露出型：P2CF-08 埋入型：Y-50 & US-08 or Y-50 & P3G-08			
復 歸 方 式		電源復歸，自動復歸，外部復歸			
復 歸 時 間		電源復歸：0.3sec 外部復歸：0.02sec			
額 定 電 壓		12~60VDC/AC 100~240VAC 50/60Hz			
容 許 電 壓 範 圍		額定電壓的90~110%			
TIME RANGE SEC: 9.9, 99 MIN: 9.9, 99 H R: 9.9, 99		H2D	H2D-M	H2D-X	H2D-XM
TIME RANGE SEC: 9.99, 99.9, 999 MIN: 99.9, 999 H R: 99.9, 999		H3D	H3D-M	H3D-X	H3D-XM
TIME RANGE SEC: 99.99, 999.9, 9999 MIN: 99M59S, 999.9, 9999 H R: 99H59M, 999.9, 9999		H4D	H4D-M	H4D-X	H4D-XM
倒 數 計 時(Y)		H2D-Y H3D-Y H4D-Y	H2D-MY H3D-MY H4D-MY	H2D-XY H3D-XY H4D-XY	H2D-XMY H3D-XMY H4D-XMY
自 動 歸 零(S) 0.5sec or 1.0sec		H2D-S H3D-S H4D-S	H2D-MS H3D-MS H4D-MS	H2D-XS H3D-XS H4D-XS	H2D-XMS H3D-XMS H4D-XMS
閃 爍 繼 電 器(R)		H2D-R H3D-R H4D-R	H2D-MR H3D-MR H4D-MR	H2D-XR H3D-XR H4D-XR	H2D-XMR H3D-XMR H4D-XMR
停 電 記 憶(M)		無停電記憶	帶停電記憶	無停電記憶	帶停電記憶
控 制 輸 出		Mode A/B 2C or 1A1C 5A 250V	Mode A/B 2C or 1A1C 5A 250V	限時接點:1C 5A 250V 1+4 GATE 開控 1+3 RESET 復歸	限時接點:1C 5A 250V 1+4 GATE 開控 1+3 RESET 復歸
精 確 度	往 復 誤 差	± 0.05% sec			
	設 定 誤 差	0			
	電 壓 誤 差	± 0.05% sec			
	溫 度 誤 差	± 0.05% sec			
壽 命	機 械	5 x 10 ⁶ times			
	電 氣	10 ⁵ times			
消 耗 功 率		Max. 3VA		Max. 2VA	
使 用 周 圍 溫 度		-10℃~ + 55℃			
使 用 周 圍 濕 度		45~85%RH			
重 量		Approx. 130g	Approx. 130g	Approx. 120g	Approx. 120g

勝 特 力 材 料 886-3-57531


勝特力电子(上海) 86-21-34970

勝特力电子(深圳) 86-755-832

Http://www.100y.com.tw

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

接線圖與時序圖

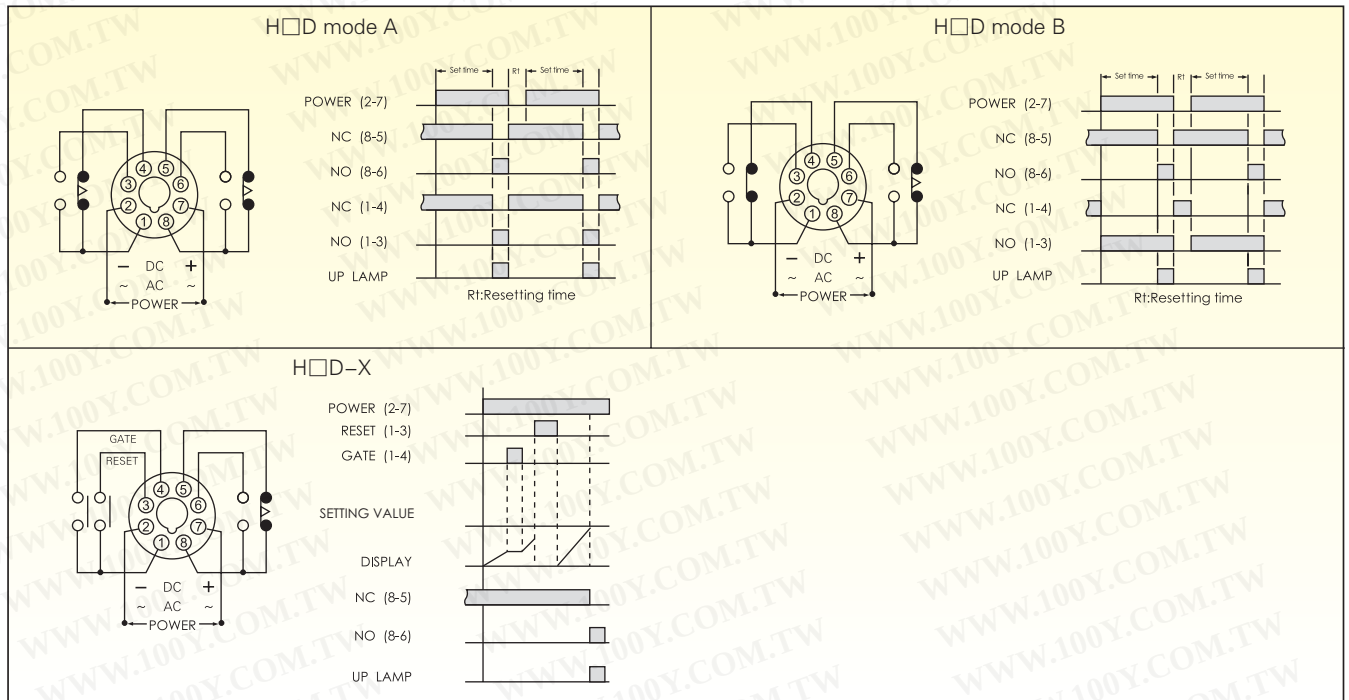

外觀尺寸圖

