
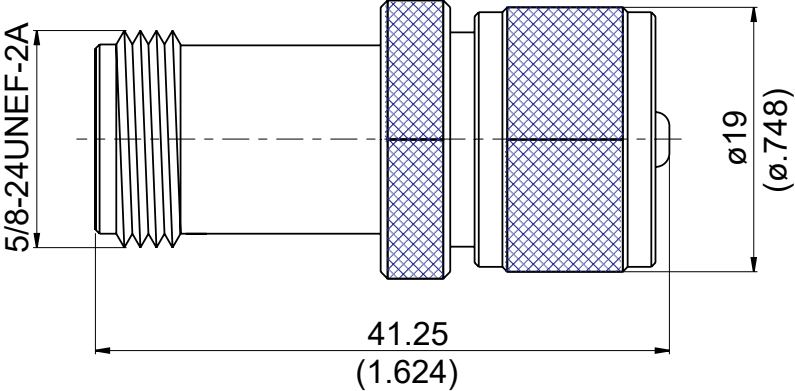


AD-N8M3	N Jack To UHF Plug 0.3GHz VSWR 1.2	50Ω																					
勝特力電材超市-龍山店 886-3-5773766 勝特力電材超市-光復店 886-3-5729570 勝特力电子(上海) 86-21-34970699 勝特力电子(深圳) 86-755-83298787 http://www.100y.com.tw 																							
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Insulator</td><td>Teflon</td><td></td></tr> <tr> <td>Retainer Ring</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> <tr> <td>Contact Pin(N)</td><td>Beryllium Copper</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Contact Pin(UHF)</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Body</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> <tr> <td>Coupling Nut(UHF)</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Insulator	Teflon		Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin(N)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Contact Pin(UHF)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Coupling Nut(UHF)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating (Micro-inch)																					
Insulator	Teflon																						
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Contact Pin(N)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
Contact Pin(UHF)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Coupling Nut(UHF)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Weight: 43.29 g																							

AD-N8M3		N Jack To UHF Plug 0.3GHz VSWR 1.2	
Interface		N	UHF
Standard		MIL-STD-348B	IEC 60169-12
Electrical Data			
Impedance		Non Constant	
Frequency Range		DC To 300MHz	
VSWR		≤ 1.2 (DC To 300MHz)	
Insertion Loss		≤ 0.05 x √f(GHz) dB	
Insulation Resistance		≥ 5000MΩ	
Dielectric Withstanding Voltage (at sea level)		2000 V rms	
Working Voltage (at sea level)		750 V rms	
Mechanical Data			
		N	UHF
Recommended Coupling Nut Torque		6 to 10 in-lbs	NA
Coupling Proof Torque		15 in-lbs	NA
Contact Captivation-axial		≥ 6.3 lbs	NA
Durability (mating)		≥ 500	NA
Environmental Data			
Temperature Range		-65°C to +165°C	
Thermal Shock		MIL-STD-202, Method 107, Condition B	
Moisture Resistance		MIL-STD-202, Method 206	
Corrosion		MIL-STD-202, Method 101, Condition B	
RoHS		Compliant	

AD-N8M3

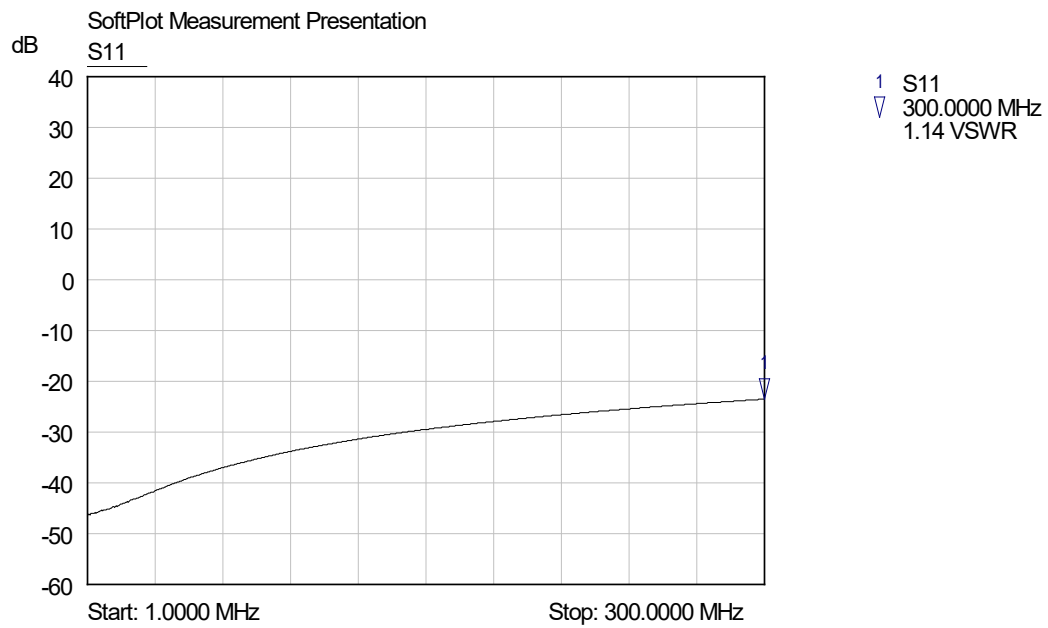

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>