

每一系列限時繼電器，皆可用指示開關選擇四種時間

使用特種接合器，即可將標準露出安裝型轉變為埋入安裝型




產品規格


類別	多段式限時繼電器		
型號	AH3-□□		
尺寸	50H×40W×57.5D		
安裝及其底座	露出型(-N)	PF085A	
	埋入型(-Y)	US-08 P3G-08	
時間範圍	A:1S,10S,1M,10M B:3S,30S,3M,30M C:6S,60S,6M,60M D:1M,10M,1H,10H E:3M,30M,3H,30H		
額定電壓	DC(V):12,24 AC(V):12,24,110,220,240,3890,415,440,50/60HZ		
指示燈動作			
O/P 輸出接點	型號	AH3-1□	AH3-2□ AH3-3□
	限時 1C	5A	5A
	限時 2C		5A
	暫態 1C		5A
壽命	機械	5×10 ⁶ times	
	電氣	10 ⁵ times	
精確度	往復誤差	±1% max	
	設定誤差	±10% max	
	電壓誤差	±1% max	
	溫度誤差	±2% max	
複歸時間	0.1 sec max		
消耗功率	2VA		

使用周圍溫度	-10°C~+55°C
使用周圍濕度	48~85%RH
重量	160g


接線圖與時序圖 AH3-1

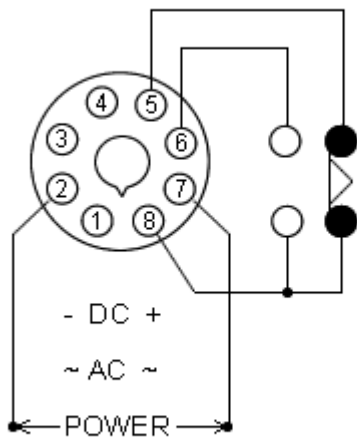


POWER(2-7)
 NC(8-5)
 NO(8-6)
 ON LAMP
 UP LAMP

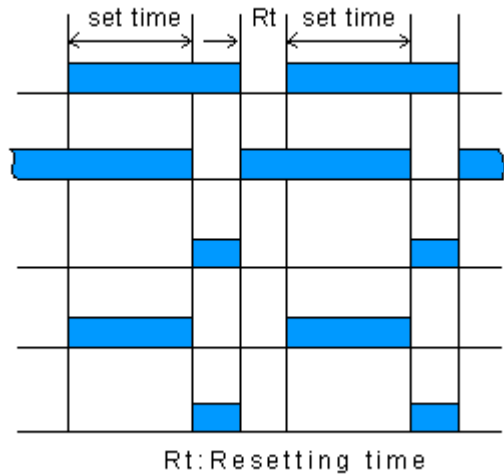

接線圖與時序圖 AH3-2

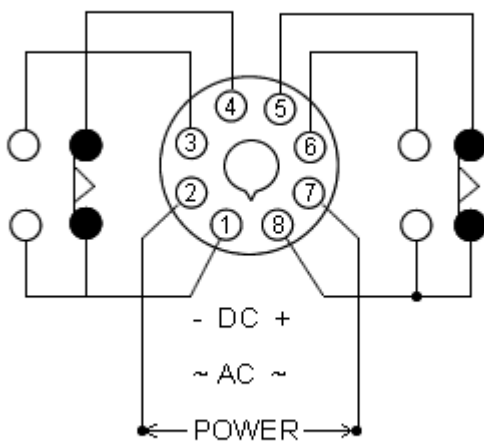


POWER(2-7)
 NC(8-5)
 NO(8-6)
 NC(1-4)
 NO(1-3)
 ON LAMP
 UP LAMP

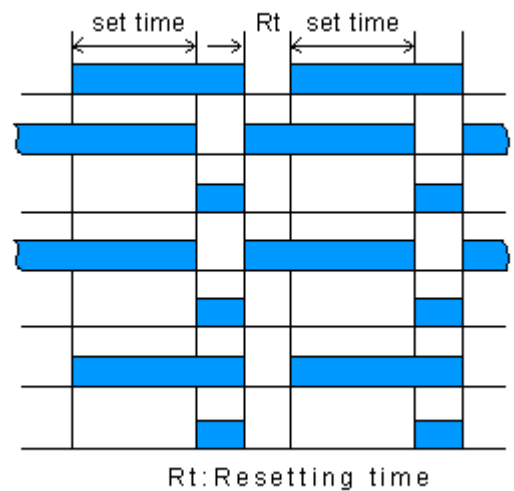

接線圖與時序圖 AH3-3

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

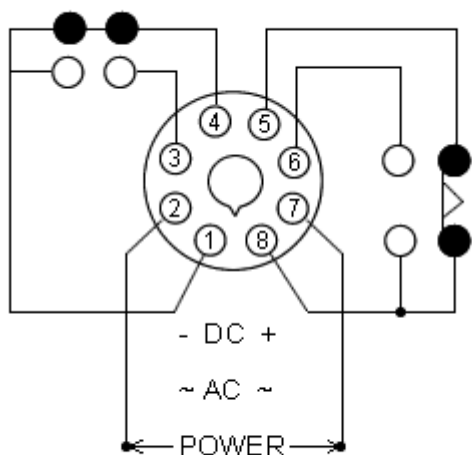

POWER(2-7)

NC(8-5)


NO(8-6)

NC(1-4)

NO(1-3)

ON LAMP

UP LAMP

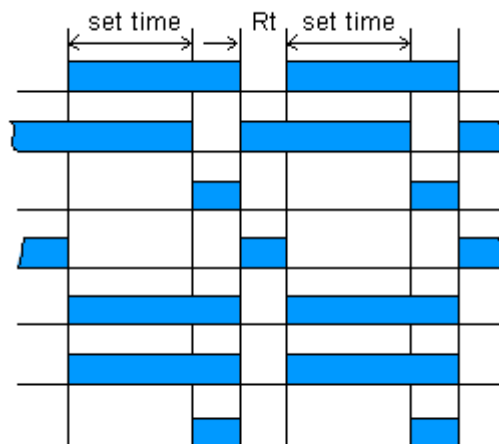

Rt:Resetting time

外形尺寸 AH3-1 □ AH3-2 □ AH3-3 □

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

