



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

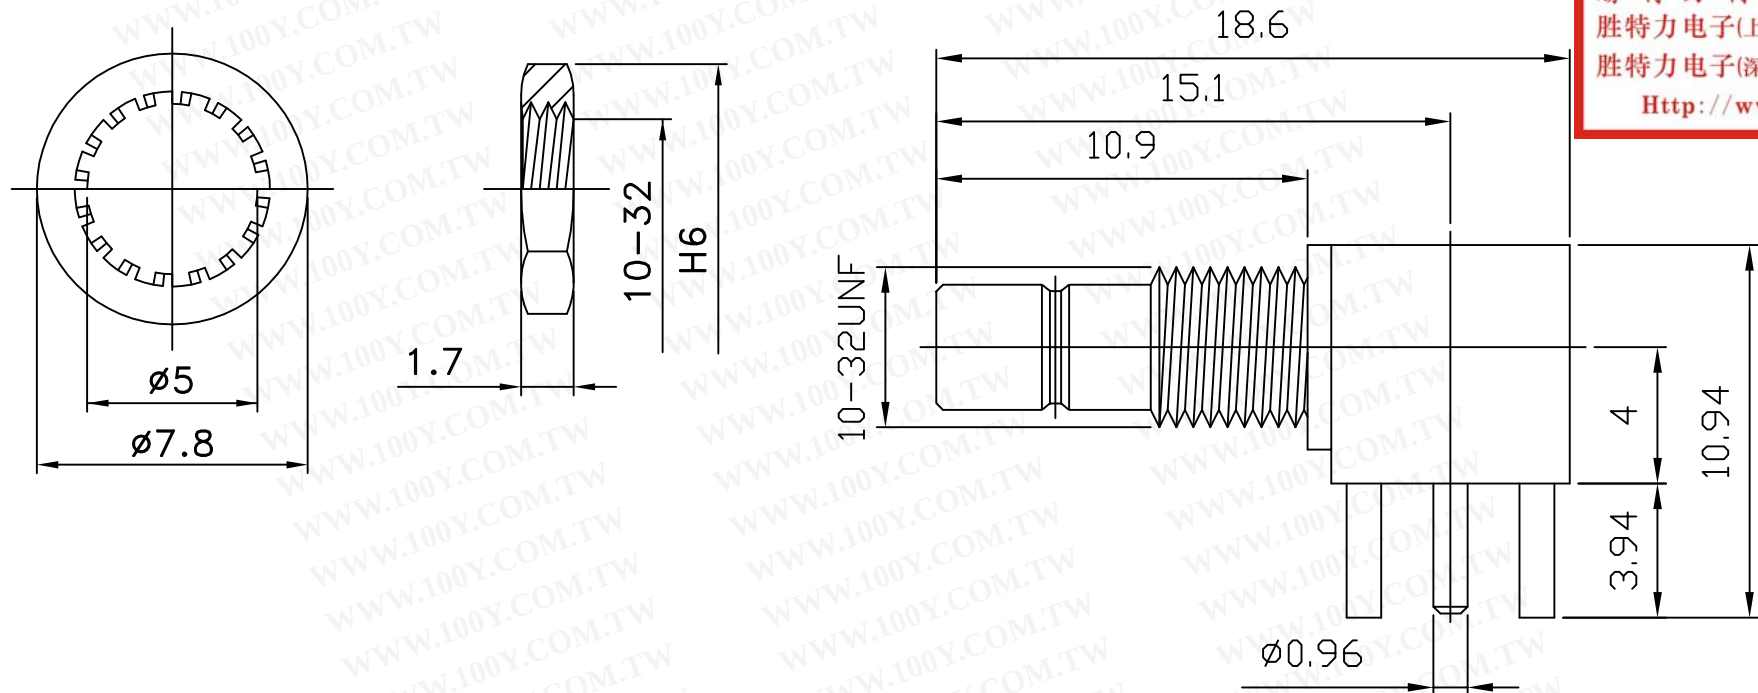

ELECTRICAL		50 OHM	
IMPEDANCE		0-4 GHz	
FREQUENCY		0.87mm	
VSWR*fin GHz	CABLE DIELECTRIC DIMENSIONS	1.5mm	
	STRAIGHT CONNECTOR DC-1000 MHz	1.3+0.04f	1.25+0.04f
	RIGHT ANGLE CONNECTOR DC-1000 MHz	1.4+0.08f	1.3+0.04f
DIELECTRIC WITHSTANDING VOLTAGE 50 Hz RMS		750V	1000V
WORKING VOLTAGE 50 Hz RMS		250V	335V
WORKING VOLTAGE DC		350V	450V
INSULATION RESISTANCE		1000 MEGOHMS MIN	
CONTACT RESISTANCE	INNER CONDUCTOR	≤ 3 MILIOHMS	
	OUTER CONDUCTOR	≤ 0.5 MILIOHMS	
INSERTION LOSS (dB MAX.)	STRAIGHT CONNECTORS	.15 dB MAX. AT 1.0GHz	
	RIGHT ANGLE CONNECTORS	.30 dB MAX. AT 1.0GHz	

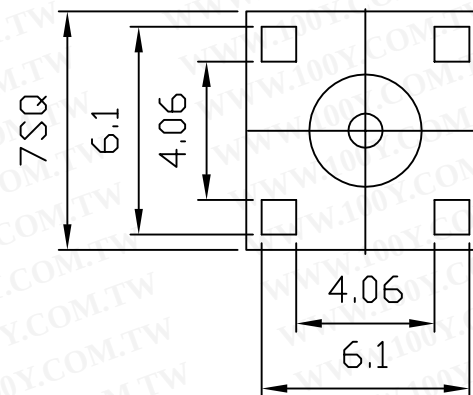

7	NUT	BRASS	GOLD	1	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-5 ± 0.2 5-30 ± 0.4 30-120 ± 0.6 120-315 ± 1 315-1000 ± 1.6 1000-2000 ± 2.4	PART NO	DATE	TITLE
6	WASHER	BRASS	GOLD	1		APPROVED	DATE	
5	DIELECTRIC	TEFLON	NONE	1		WOUDY		
4	DIELECTRIC	TEFLON	NONE	1		CHECKED	DATE	DRAWING NO
3	PIN	BRASS	GOLD	1		LUCY		
2	BODY	BRASS	GOLD	1		DRAWN	DATE	FILE NO
1	BODY	BRASS	GOLD	1		LED		
NO	DESCRIPTION	MATERIAL	FINISH	QTY	SCALE	ISSUE	MM	

SMB R/A P.C MOUNT JACK

DRAWING NO MCI-9112-鎖機板-EV

FILE NO 911210BGBGGT5