

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Plug-In & Coaxial




MODEL NO.	STOP BAND, MHz		f _{co} , MHz Nom.	PASSBAND, MHz	VSWR, Stopband, Passband		CAPD DATA	CASE STYLE	c o n n e c t i o n	PRICE \$
	(loss > 40dB)	(loss > 20dB)			(loss < 1dB)	Typ.				
BHP-25	DC-13	13- 19	25	27.5-200	18:1	1.7:1	FOR DATA SEE YONI ON OUR WEBSITE	FF55	-	38.95
BHP-50	DC-20	20- 26	37	41-200	17:1	1.5:1		FF55	-	36.95
BHP-100	DC-40	40- 55	82	90-400	17:1	1.5:1		FF55	-	36.95
BHP-150	DC-70	70- 95	120	133-600	17:1	1.8:1		FF55	-	36.95
BHP-175	DC-70	70-105	140	160-800	17:1	1.5:1		FF55	-	36.95
BHP-200	DC-90	90-116	164	185-800	17:1	1.6:1		FF55	-	36.95
BHP-250	DC-100	100-150	205	225-1200	17:1	1.3:1		FF55	-	36.95
BHP-300	DC-145	145-190	245	*290-1200	17:1	1.7:1		FF55	-	36.95
BHP-400	DC-210	210-290	360	395-1600	17:1	1.7:1		FF55	-	36.95
BHP-500	DC-280	280-365	454	500-1600	17:1	1.9:1		FF55	-	36.95
BHP-600	DC-350	350-440	545	600-1600	17:1	2.0:1		FF55	-	36.95
BHP-700	DC-400	400-520	640	700-1800	17:1	1.6:1		FF55	-	36.95
BHP-800	DC-445	445-570	710	780-2000	17:1	2.1:1		FF55	-	36.95
BHP-900	DC-520	520-660	820	910-2100	17:1	1.8:1		FF55	-	36.95
BHP-1000	DC-550	550-720	900	1000-2200	17:1	1.9:1		FF55	-	36.95
NHP-25	DC-13	13- 19	25	27.5-200	18:1	1.7:1		FF57	-	39.95
NHP-50	DC-20	20- 26	37	41-200	17:1	1.5:1		FF57	-	39.95
NHP-100	DC-40	40- 55	82	90-400	17:1	1.5:1		FF57	-	39.95
NHP-150	DC-70	70- 95	120	133-600	17:1	1.8:1		FF57	-	39.95
NHP-175	DC-70	70-105	140	160-800	17:1	1.5:1		FF57	-	39.95
NHP-200	DC-90	90-116	164	185-800	17:1	1.6:1	FF57	-	39.95	
NHP-250	DC-100	100-150	205	225-1200	17:1	1.3:1	FF57	-	39.95	
NHP-300	DC-145	145-190	245	*290-1200	17:1	1.7:1	FF57	-	39.95	
NHP-400	DC-210	210-290	360	395-1600	17:1	1.7:1	FF57	-	39.95	
NHP-500	DC-280	280-365	454	500-1600	17:1	1.9:1	FF57	-	39.95	
NHP-600	DC-350	350-440	545	600-1600	17:1	2.0:1	FF57	-	39.95	
NHP-700	DC-400	400-520	640	700-1800	17:1	1.6:1	FF57	-	39.95	
NHP-800	DC-445	445-570	710	780-2000	17:1	2.1:1	FF57	-	39.95	
NHP-900	DC-520	520-660	820	910-2100	17:1	1.8:1	FF57	-	39.95	
NHP-1000	DC-550	550-720	900	1000-2200	17:1	1.9:1	FF57	-	39.95	
SHP-25	DC-13	13- 19	25	27.5-200	18:1	1.7:1	FF99	-	38.95	
SHP-50	DC-20	20- 26	37	41-200	17:1	1.5:1	FF99	-	38.95	
SHP-100	DC-40	40- 55	82	90-400	17:1	1.5:1	FF99	-	38.95	
SHP-150	DC-70	70- 95	120	133-600	17:1	1.8:1	FF99	-	38.95	
SHP-175	DC-70	70-105	140	160-800	17:1	1.5:1	FF99	-	38.95	
SHP-200	DC-90	90-116	164	185-800	17:1	1.6:1	FF99	-	38.95	
SHP-250	DC-100	100-150	205	225-1200	17:1	1.3:1	FF99	-	38.95	
SHP-300	DC-145	145-190	245	*290-1200	17:1	1.7:1	FF99	-	38.95	
SHP-400	DC-210	210-290	360	395-1600	17:1	1.7:1	FF99	-	38.95	
SHP-500	DC-280	280-365	454	500-1600	17:1	1.9:1	FF99	-	38.95	
SHP-600	DC-350	350-440	545	600-1600	17:1	2.0:1	FF99	-	38.95	
SHP-700	DC-400	400-520	640	700-1800	17:1	1.6:1	FF99	-	38.95	
SHP-800	DC-445	445-570	710	780-2000	17:1	2.1:1	FF99	-	38.95	
SHP-900	DC-520	520-660	820	910-2100	17:1	1.8:1	FF99	-	38.95	
SHP-1000	DC-550	550-720	900	1000-2200	17:1	1.9:1	FF99	-	38.95	

FILTERS 50Ω

Surface Mount \square

High Pass 16.5 MHz to 2.2 GHz

SURFACE MOUNT




SCHF



PHP

MODEL NO.	STOP BAND, MHz		fco, MHz Nom.	PASSBAND, MHz (loss < 1 dB)	VSWR, Stopband Passband		CAPD DATA	CASE STYLE Note B	connection	PRICE \$ Qty. (1-9)
	(loss > 40dB)	(loss > 20dB)			Typ.	Typ.				
NEW SCHF-17	DC-9	9-13	16.5	18-200	18:1	1.25:1		YY161	cr	15.95
SCHF-25	DC-13	13-19	25	27.5-200	18:1	1.3:1		YY161	cr	14.95
SCHF-300	DC-145	145-190	245	290-1200	18:1	1.5:1		YY161	cr	14.95
PHP-25	DC-13	13-19	25	27.5-200	18:1	1.7:1	FOR DATA	A01	cr	16.95
PHP-50	DC-20	20-26	37	41-200	17:1	1.5:1		A01	cr	14.95
PHP-100	DC-40	40-55	82	90-400	17:1	1.5:1	SEE YONI	A01	cr	14.95
PHP-150	DC-70	70-95	120	133-600	17:1	1.8:1		A01	cr	14.95
PHP-175	DC-70	70-105	140	160-800	17:1	1.5:1	ON OUR WEBSITE	A01	cr	14.95
PHP-200	DC-90	90-116	164	185-800	17:1	1.6:1		A01	cr	14.95
PHP-250	DC-100	100-150	205	225-1200	17:1	1.3:1	ON OUR WEBSITE	A01	cr	14.95
PHP-300	DC-145	145-170	245	*290-1200	17:1	1.7:1		A01	cr	14.95
PHP-400	DC-210	210-290	360	395-1600	17:1	1.7:1	ON OUR WEBSITE	A01	cr	14.95
PHP-500	DC-280	280-365	454	500-1600	17:1	1.9:1		A01	cr	14.95
PHP-600	DC-350	350-440	545	600-1600	17:1	2.0:1	A01	cr	14.95	
PHP-700	DC-400	400-520	640	700-1800	17:1	1.6:1	A01	cr	14.95	
PHP-800	DC-445	445-570	710	780-2000	17:1	2.1:1	A01	cr	14.95	
PHP-900	DC-520	520-660	820	910-2100	17:1	1.8:1	A01	cr	14.95	
PHP-1000	DC-550	550-720	900	1000-2200	17:1	1.9:1	A01	cr	14.95	

HIGH PASS TYPICAL FREQUENCY RESPONSE

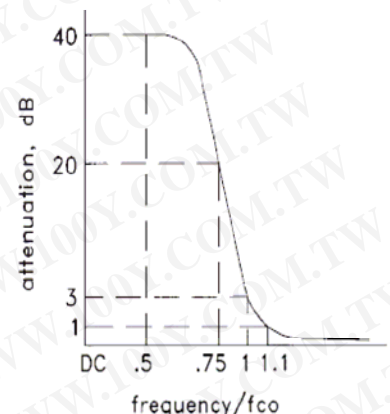

NOTES:

- * Insertion loss 1.5 dB maximum
- \square Non-hermetic
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel and MIL description are given in section 0, see "Mini-Circuits Guarantees Quality" article.
- B. Connector types and case mounted options, case finishes are given in section 0, see "Case styles & outline drawings".
- C. Prices and specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings.

pin connections

see case style outline drawings