

PIN HEADER 1.27x1.27mm STRAIGHT TYPE

MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V





Contact Resistance : 20m Ω Max. at DC 100mA

Operation Temperature : -55°C to +105°C

ORDER INFORMATION

- 1: Plastic Height=1.0mm
- 2: Plastic Height=1.5mm
- 3: Plastic Height=2.5mm
- 2: 2: Dual rows
3. No. of contacts per row (2~50)
4. G: Gold flash
T: Tin plated
5. B: Black Insulator
6. No standard spec., please fill out A/B/C.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

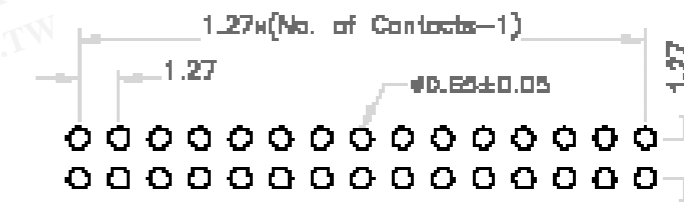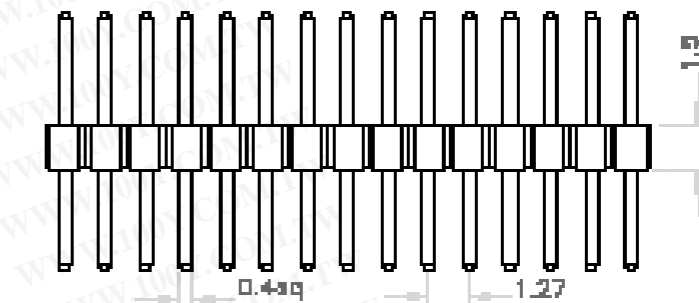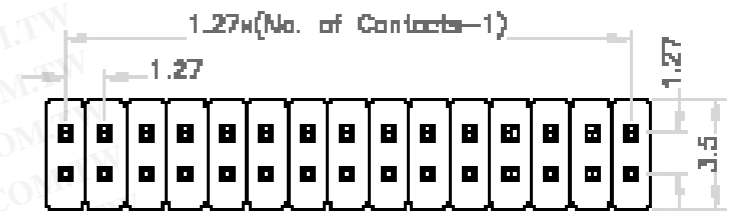

Recommended P.C.B. Layout