


2EDGKA-3.5/3.81mm 插頭

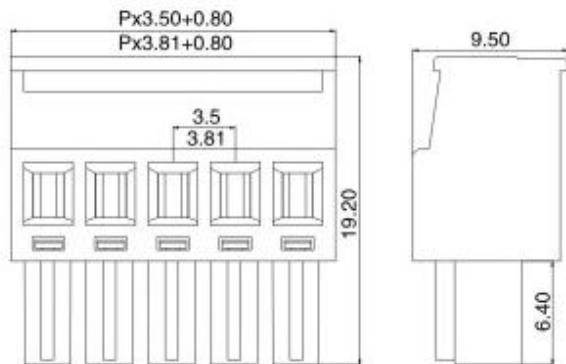

材质及电镀

间距: 3.5/3.81mm
极数: 2P-24P
螺丝: M2、钢、镀锌
触点材料: 磷青铜、镀镍
方扣: 黄铜、镀镍
塑件: PA66.UL94V-0

电气性能

额定电压: 300V
额定电流: 8A
耐电压: AC2000V/1Min
使用线径: 28-16 AWG

机械性能

温度范围: -40℃~+105℃
瞬时温度: +250℃5秒
扭矩: 0.2Nm (1.8lb.in)
剥线长度: 7mm

MATERIAL

Pitch: 3.5/3.81mm
Poles: 2P-24P
Screw: M2、Steel、Zinc plated
Contact: Phosphor bronze Ni plated
Wire cage: Brass、Ni plated
Housing: PA66. UL94V - 0

ELECTRICAL

Rated voltage: 300V
Rated current: 8A
Withstanding voltage: AC2000V/1Min
Wire range: 28-16 AWG

MECHANICAL

Temperature range: -40℃~+105℃
MAX soldering: + 250℃ for 5 sec.
Torque: 0.2 Nm (1.8 lb.in)
Strip length: 7mm