

SG - 207

The SG - 207 photointerrupter high - performance standard type, combines high - output GaAs IRED with high sensitive phototransistor.

FEATURES


- High performance
- High - speed response
- 5mm gap.
- Widely applicable

APPLICATIONS

- Tape - end sensors
- Timing sensors
- Edge sensors
- Copiers

DIMENSIONS

(Unit : mm)

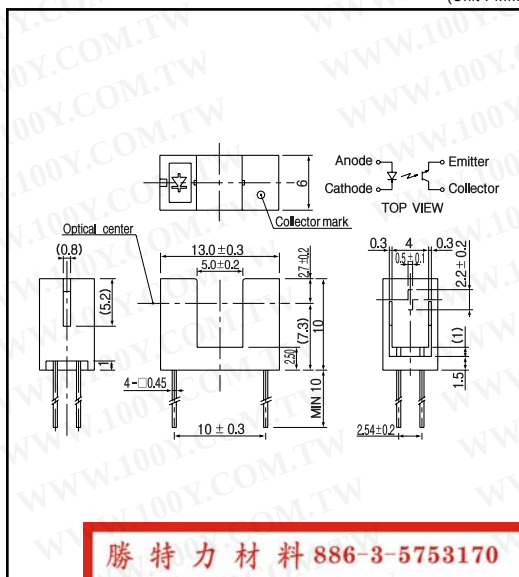

MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Input	Power dissipation	P _D	100
	Reverse voltage	V _R	5
	Forward current	I _F	60
	Pulse forward current ^{*1}	I _{FP}	1
Output	Collector power dissipation	P _C	100
	Collector current	I _C	40
	C - E voltage	V _{CEO}	30
	E - C voltage	V _{ECO}	5
Operating temp.		T _{opr.}	- 20 ~ +85
Storage temp.		T _{stg.}	- 30 ~ +85
Soldering temp. ^{*2}		T _{sol.}	240

*1. t w 100 μsec. period : T=10msec.

*2. For MAX. 5 seconds at the position of 2mm from the package

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 °C)


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	V _F	I _F =30mA	1.2	1.5	V
	Reverse current	I _R	V _R =5V		10	μA
	Capacitance	C _t	V=0, f=1KHz	25		pF
	Peak wavelength	λ _p		940		nm
Output	Collector dark current	I _{CEO}	V _{CE} =10V		0.1	μA
	Light current	I _L	V _{CE} =5V, I _F =20mA	0.25		mA
C - E saturation voltage		V _{CE(sat)}	I _F =30mA, I _C =0.1mA		0.3	V
Switching speeds	Rise time	t _r	V _{CC} =5V, I _F =2mA	5		μsec.
	Fall time	t _f	R _L =100Ω	5		μsec.

Photo interrupters(Transmissive)


SG - 207

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Collector power dissipation Vs. Ambient temperature

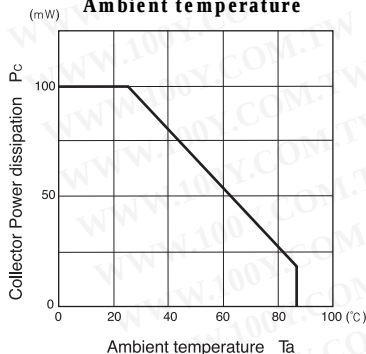


Forward current Vs. Forward voltage




Light current Vs. Forward current

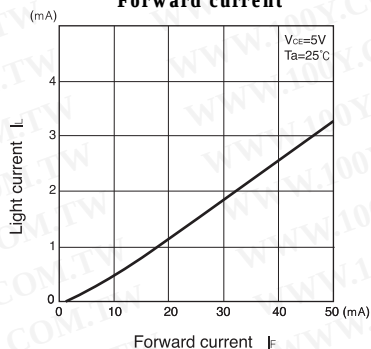


Light current Vs. Collector-Emitter voltage




Relative light current Vs. Ambient temperature




Dark current Vs. Ambient temperature

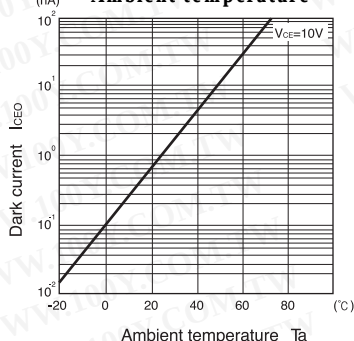


Switching time Vs. Load resistance

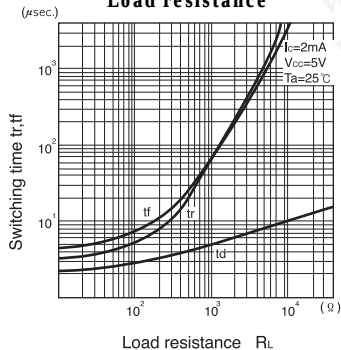

Relative light current Vs. Moving distance

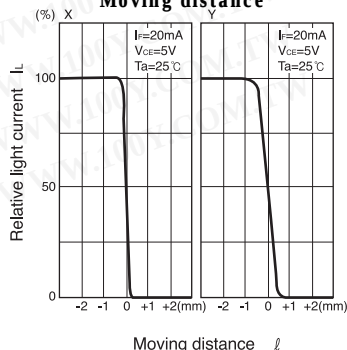

Switching time measurement circuit



Method of measuring position characteristic

