

SPECIFICATION

ELECTRICAL






- Contact Current Rating : 1 Ampere
- Contact Resistance : 25 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds

MATERIAL

- Insulator : PBT UL 94V-0
- Contact : Brass
- Contact Plated : Selective Gold Over Copper Plated
- Shell : Steel
- Shell Plated : Tin , Nickel OR Zinc Plated

MECHANICAL

- Mating cycles : 3000 Cycles Min.
- Operation Temperature : - 40°C to + 105°C

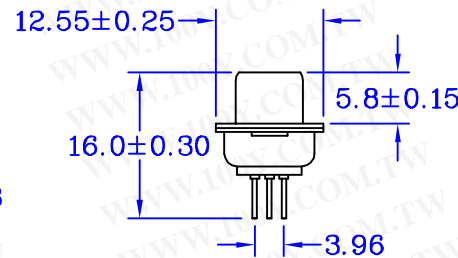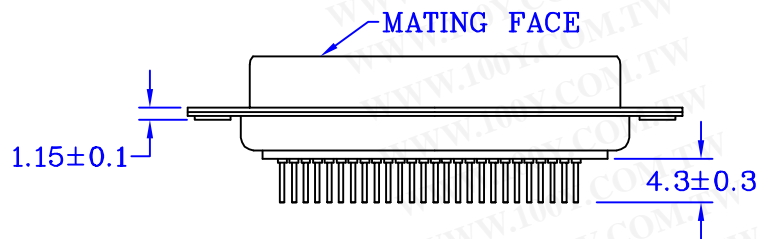

HDPSXXSB1A1	DIMENSIONS			
CONTACTS	A	B	C	D
15	16.33	24.99	30.81	2.29
26	24.66	33.32	39.25	2.29
44	38.38	47.04	53.04	2.29
62	54.84	63.50	69.50	2.41

UNIT: mm

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

日期 DATE
2009/01/21
比例 SCALE
1:1

HDPSXXSB1A1

圖號 521-XX
DRAWING NO.