



## ■ 技术参数 SPECIFICATIONS


- 线数 (Poles) : 2~12
- 适应基板厚度 (Applicable PC board thickness) : 1.78 max
- 温度范围 (Temperature range) : -25 ℃~85 ℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 8A max
- 接触电阻 (Contact resistance) :  $\leq 0.015\Omega$
- 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1500V.Ac/1min
- 材料 (Material) :
  - 针座 (Wafer) : 尼龙 (PA66) UL94V-2 (0)
  - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

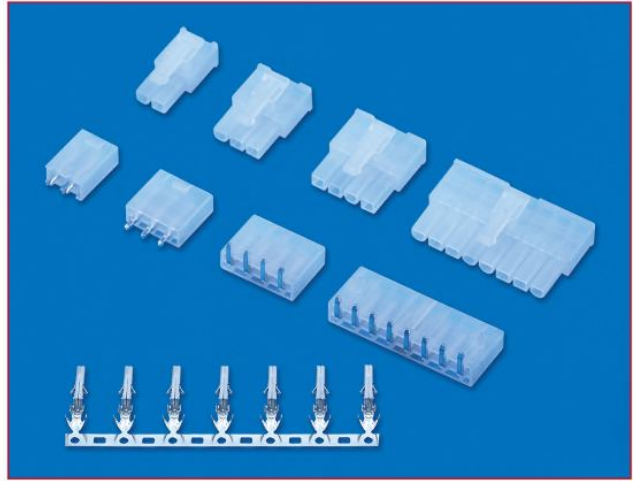


### HX42002-AN (5566尖针)

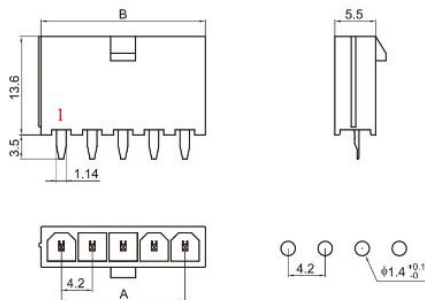

### HX42003-WAD (5569)

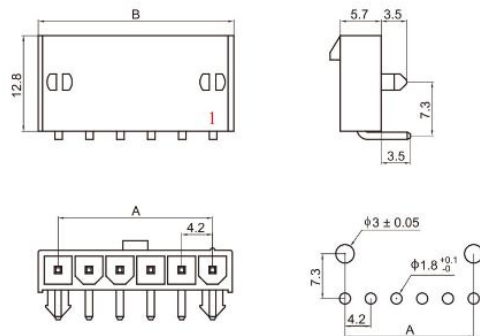

### HX42003-AN (5569四方针)

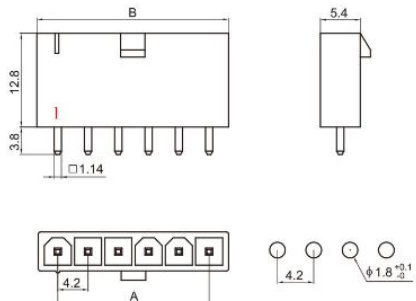


## ■ 端子 TERMINAL

端子与HX42000-RT (5556) 型端子通用 (P158)  
Terminal is interchangeable with HX42000-RT (5556)  
Terminal.(P158)

## ■ 插头 PLUG HOUSING

孔座与HX42000-RN/RH (5557) 型插头通用 (P158)  
Housing is interchangeable with Hx42000-RN/RH (5557)  
Plug housing.(P158)

### HX42003-WAN (5569)

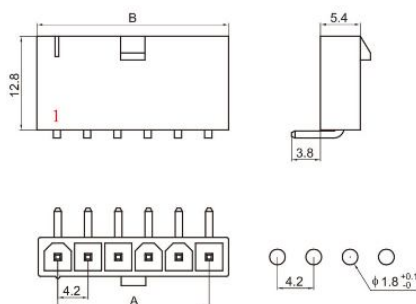

### 单排针座WAFER (5569四方针/5566尖针)

线数 Poles	型号 PART No.			尺寸Dimensions(mm)	
	5566尖针	5569四方针	5569弯式(90°)	A	B
2	HX42002-2AN	HX42003-2AN	HX42003-2WAN/WAD	4.2	9.6
3	HX42002-3AN	HX42003-3AN	HX42003-3WAN/WAD	8.4	13.8
4	HX42002-4AN	HX42003-4AN	HX42003-4WAN/WAD	12.6	18.0
5	HX42002-5AN	HX42003-5AN	HX42003-5WAN/WAD	16.8	22.2
6	HX42002-6AN	HX42003-6AN	HX42003-6WAN/WAD	21.0	26.4
7	HX42002-7AN	HX42003-7AN	HX42003-7WAN/WAD	25.2	30.6
8	HX42002-8AN	HX42003-8AN	HX42003-8WAN/WAD	29.4	34.8
9	HX42002-9AN	HX42003-9AN	HX42003-9WAN/WAD	33.6	39.0
10	HX42002-10AN	HX42003-10AN	HX42003-10WAN/WAD	37.8	43.2
11	HX42002-11AN	HX42003-11AN	HX42003-11WAN/WAD	42.0	47.4
12	HX42002-12AN	HX42003-12AN	HX42003-12WAN/WAD	46.2	51.6