



REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

A
B
C
D
E
F
G

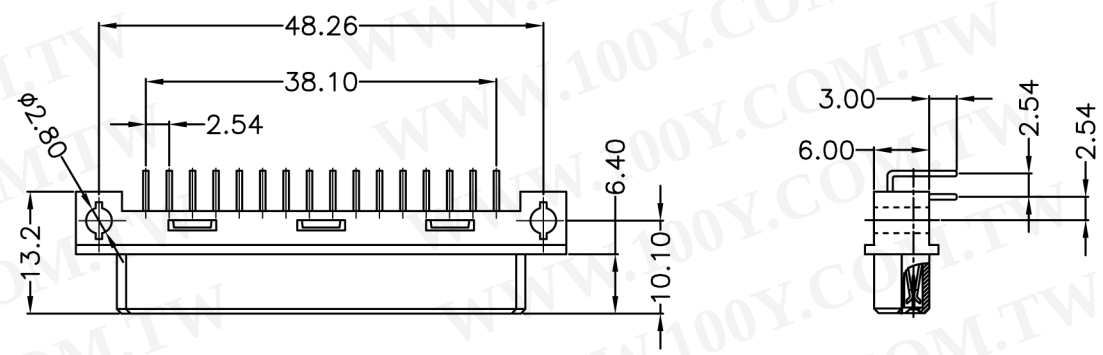


SPECIFICATION
MATERIAL
Housing:PBT+5%PC UL94V-0
Contacts:PhosPhor Bronze
CONTACT PLATING
S=GOLD FLASH PLATED ON CONTACT AREA, TIN
PLATED ON SOLDER TAIL, Ni UNDER PLATED ALL OVER.
A=5u"(Selective)
B=10u"(Selective)
C=15u"(Selective)
D=30u"(Selective)
ELECTRICAL
Current rating: 2 Amps .
Contact resistance: 20 mohms initial
Insulation resistance: 100000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute
Operating temperature: -55° C TO +125° C

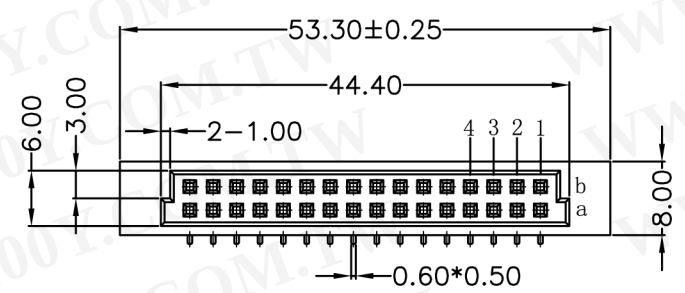

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

- Part no. $\frac{A01}{1}$ $\frac{A}{2}$ - $\frac{032}{3}$ $\frac{F}{4}$ $\frac{X}{5}$ $\frac{R}{6}$ $\frac{2}{7}$ $\frac{A}{8}$ $\frac{E}{9}$ $\frac{X}{10}$
1. SERIES NO.
2. TYPE:
 A=Standard
3. CONTACT NUMBER
4. CONTACT TYPE:
 F=Female
5. CONTACT AREA PLATING:
 SEE SPECIFICATION
6. FUNCTION OPTION:
 R=Right angle
7. PROCESS OPTION:
 2=2*16 Housing (Male=180°
 Female=90°)
8. ROW SPACING:
 A=2.54mm (a+b满针)
9. CONTACT LENGTH:
 E=3.0mm
10. INSULATOR COLOR:
 5=BEIGE
 A=Champagne

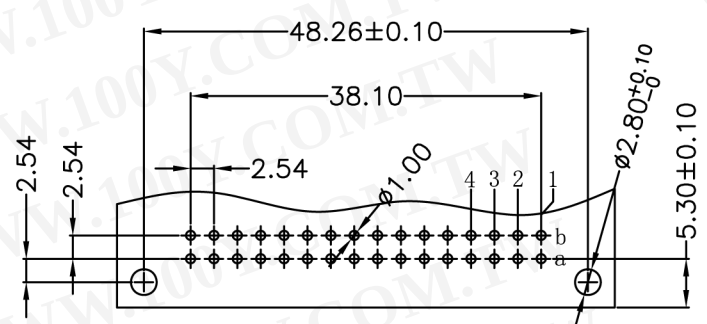

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

公差一览表				nextion® CONNECTOR					
TOLERANCE UNLESS OTHERWISE				单位 UNITS	mm	制图 DRAWING	姚登攀	产品名称 TITLE	欧式插座 232 S型 母弯
X.	±0.25	X°.	±5°	角法 VIEW		设计 DESIGN	姚登攀	产品料号 PART NO.	A01A-032FXR2AEX
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	A01A-032FXR2AEX-A0
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2009.09.15	核准 APPD			
				版本 VER	A0				