
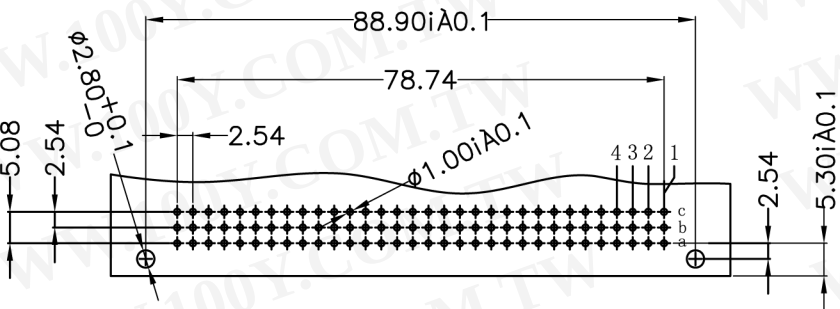
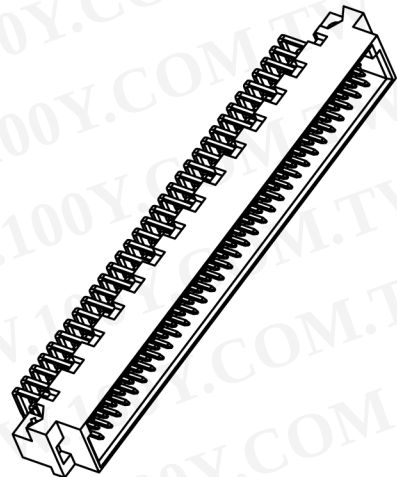
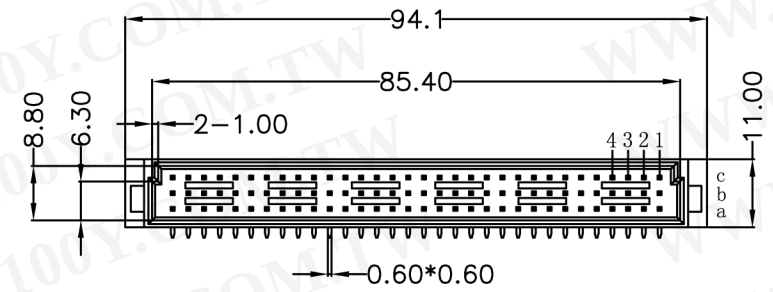



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

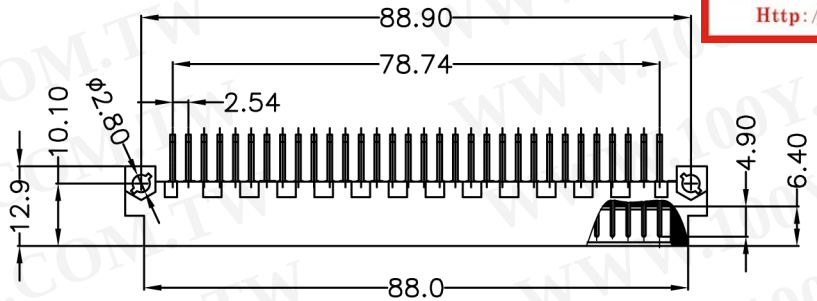

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

SPECIFICATION
MATERIAL
Housing:PBT+5%PC UL94V-0
Contacts:Brass
CONTACT PLATING
G=GOLD FLASH PLATED ALL OVER,Ni UNDER PLATED ALL OVER.
T=TIN PLATED ALL OVER,Ni UNDER PLATED ALL OVER.
S=GOLD FLASH PLATED ON CONTACT AREA,TIN
PLATED ON SOLDER TAIL,Ni UNDER PLATED ALL OVER.
A=5u"(Selective) R=3u"(Selective)
B=10u"(Selective) P=8u"(Selective)
C=15u"(Selective) E=2u"(Semi-Gold Matte Tin)
D=30u"(Selective) F=3u"(Semi-Gold Matte Tin)
V=1u"(Selective) U=5u"(Semi-Gold Matte Tin)
N=3u"(Gold)
ELECTRICAL
Current rating: 2 Amps .
Contact resistance: 20 mohms initial
Insulation resistance: 100000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute
Operating temperature: -55° C TO +125° C

- Part no. A02 A - 096 M X R F A E X
 1 2 3 4 5 6 7 8 9 10
- | | |
|---|---|
| 1. SERIES NO. | 7. PROCESS OPTION: |
| 2. TYPE:
A=Standard | F=3*32 Housing (Male=90°
Female=180°) |
| 3. CONTACT NUMBER | 8. ROW SPACING:
A=2.54mm(a+b+c) |
| 4. CONTACT TYPE:
M=Male | 9. CONTACT LENGTH:
E=3.0mm(Right angle only) |
| 5. CONTACT AREA PLATING:
SEE SPECIFICATION | 10. INSULATOR COLOR:
5=BEIGE
A=Champagne |
| 6. FUNCTION OPTION:
R=Right angle | |

公差一覽表 TOLERANCE UNLESS OTHERWISE				nextion® CONNECTOR			
X.	±0.25	X°.	±5°	單位 UNITS	mm	制圖 DRAWING	姚登攀
.X	±0.20	.X°.	±2°	角法 VIEW	⊙ ⊠	設計 DESIGN	姚登攀
.XX	±0.15	.XX°.	±1°	比例 SCALE	1:1	審核 CHECK	
.XXX	±0.02	.XXX°.	±0.5°	版本 VER	A0	核准 APPD	
日期 DATE		2009. 04. 22		產品名稱 TITLE	歐式插座 396 A2型 90度 公座		
				產品料號 PART NO.	A02A-096MXRFAEX		
				圖號 DRAW NO.	A02A-096MXRFAEX-A0		