

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

SPECIFICATION

MATERIAL

Housing: PBT+5%PC UL94V-0 Color: BEIGE

Contacts: Brass

CONTACT PLATING

G= GOLD FLASH PLATED ALL OVER, Ni UNDER PLATED ALL OVER.

T= TIN PLATED ALL OVER, Ni UNDER PLATED ALL OVER.

S= GOLD FLASH PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAIL, Ni UNDER PLATED ALL OVER.

A=5u" (Selective)

B=10u" (Selective)

C=15u" (Selective)

D=30u" (Selective)

ELECTRICAL

Current rating: 2 Amps .

Contact resistance: 20 mohms initial

Insulation resistance: 100000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

Part no. $\frac{A02}{1} \frac{A}{2} - \frac{096}{3} \frac{M}{4} \frac{X}{5} \frac{S}{6} \frac{0003}{7}$

1. SERIES NO.

2. TYPE:

A=Standard

3. CONTACT NUMBER

4. CONTACT TYPE:

M=Male

5. CONTACT AREA PLATING:

SEE SPECIFICATION




6. FUNCTION OPTION:

S=STRAIGHT

7. Serial Number

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

公差一览表				nextion® CONNECTOR					
TOLERANCE UNLESS OTHERWISE				单位 UNITS	mm	制图 DRAWING	管正志	产品名称 TITLE	欧式插座 396 C2型
X.	±0.25	X°.	±5°	角法 VIEW	1:1	设计 DESIGN	管正志	图号 PART NO.	180度 公座
.XX	±0.20	.XX°	±2°	比例 SCALE	1:1	审核 CHECK		产品料号 PART NO.	A02A-096MXS0003
.XXX	±0.02	.XXX°	±0.5°	版本 VER	A0	核准 APPD		图号 DRAW NO.	A02A-096MXS0003-A0
日期 DATE	2010.08.23								

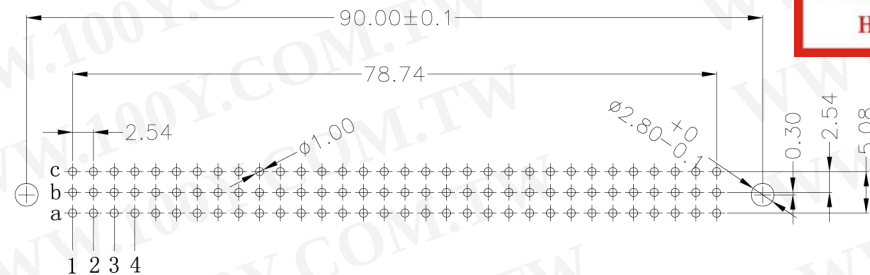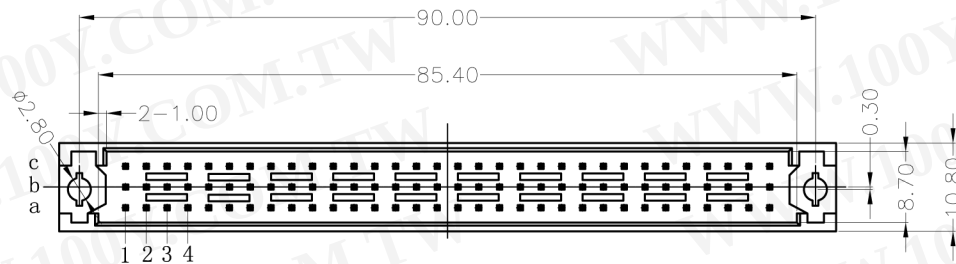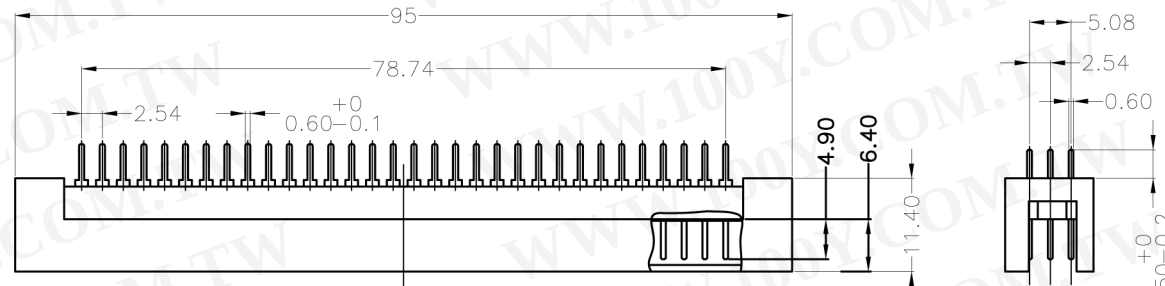

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)