

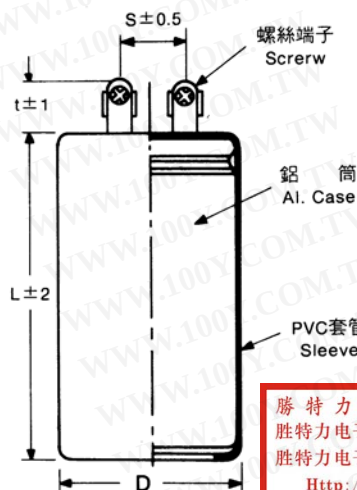


電動機起動用交流電解電容器 MOTOR STARTING ELECTROLYTIC CAPACITOR

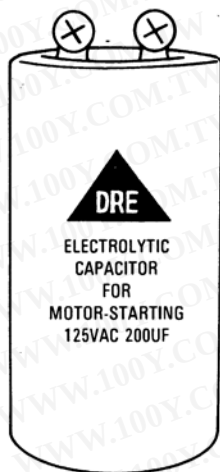

直徑 (mm)	t (mm)	s (mm)
30	10	10
35	11	14
40	11	14
45	11	14
50	13	18



勝特力材料 886-3-5753170
 勝特力電子(上海) 86-21-54151736
 勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

註記

REMARKS

- 過電壓兩端子間加以定額電壓之1.4倍30秒鐘。
 Shall be tested by applying $1.4 \times \text{Rated voltage}$ between two terminals for 30 seconds.
- 定額電壓1.2倍2分無異狀。
 Shall be tested by applying $1.2 \times \text{Rated voltage}$ between two terminals for 120 seconds.
- 適用規格符合 JIS4905 According to JIS 4905

額定電壓

LIFE TEST

- 1.110. 125V 1秒充電29秒放電1分2週75000週
 160. 220V 1秒充電59秒放電1分1週30000週
 Shall be tested by applying Rated voltage for one second shorted for 29 seconds, passed 75,000cycle.
- 2.耐用試驗后力率20%以下，靜電容量±25%以內。
 Life test results of capacitors with power factor and electrostatic capacity must be 20% and 25% max..

R型標準規格

TYPE STANDARD

適用規格： JIS 4905

型式 MODEL	定格電壓 V.A.C.	靜電容量 μF	容量許容差 %	使用溫度範圍 $^{\circ}\text{C}$	力率 Pf%	週波數 Hz	尺寸 Size (mm)	
							D $\varnothing$	L
RMS-121	125	50	0~+20	-20~65	80% (MAX)	50/60	30.5	50
RMS-122	125	75	0~+20	-20~65	80% (MAX)	50/60	35.5	50
RMS-123	125	100	0~+20	-20~65	80% (MAX)	50/60	35.5	60
RMS-124	125	150	0~+20	-20~65	80% (MAX)	50/60	35.5	70
RMS-125	125	200	0~+20	-20~65	80% (MAX)	50/60	40.5	70
RMS-126	125	250	0~+20	-20~65	80% (MAX)	50/60	40.5	80
RMS-127	125	300	0~+20	-20~65	80% (MAX)	50/60	45.5	90
RMS-128	125	400	0~+20	-20~65	80% (MAX)	50/60	45.5	100
RMS-129	125	500	0~+20	-20~65	80% (MAX)	50/60	51.5	100
RMS-130	125	600	0~+20	-20~65	80% (MAX)	50/60	51.5	100
RMS-161	160	50	0~+20	-20~65	80% (MAX)	50/60	35.5	60
RMS-162	160	75	0~+20	-20~65	80% (MAX)	50/60	35.5	60
RMS-163	160	100	0~+20	-20~65	80% (MAX)	50/60	35.5	70
RMS-164	160	150	0~+20	-20~65	80% (MAX)	50/60	40.5	80
RMS-165	160	200	0~+20	-20~65	80% (MAX)	50/60	40.5	90
RMS-166	160	300	0~+20	-20~65	80% (MAX)	50/60	45.5	100
RMS-201	250	40	0~+20	-20~65	80% (MAX)	50/60	35.5	70
RMS-202	250	50	0~+20	-20~65	80% (MAX)	50/60	35.5	80
RMS-203	250	70	0~+20	-20~65	80% (MAX)	50/60	40.5	80
RMS-204	250	80	0~+20	-20~65	80% (MAX)	50/60	40.5	90
RMS-205	250	100	0~+20	-20~65	80% (MAX)	50/60	45.5	100
RMS-206	250	125	0~+20	-20~65	80% (MAX)	50/60	51.5	100
RMS-207	250	150	0~+20	-20~65	80% (MAX)	50/60	51.5	100
RMS-208	250	200	0~+20	-20~65	80% (MAX)	50/60	51.5	100