



REV.	ECN NO.	DESCRIPTION	DATE	DESIGN


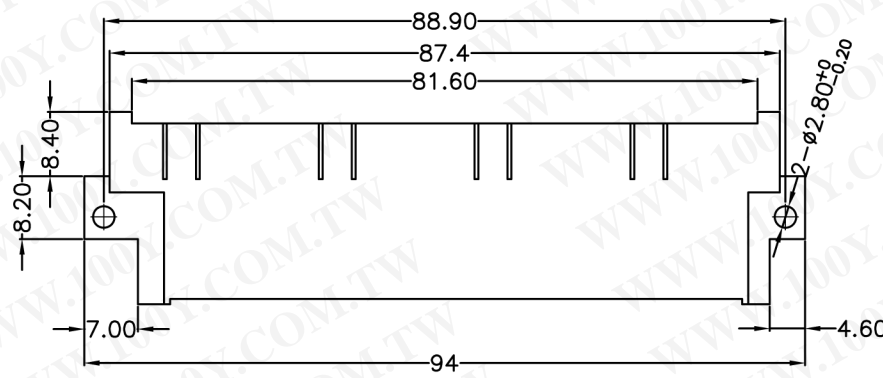


SPECIFICATION
MATERIAL
 Housing:PBT+30%G.F. UL94V-0 Color:Greyish White
 Contacts:Brass
CONTACT PLATING
 TIN PLATED ON ALL OVER,Ni UNDER PLATED ALL OVER.
ELECTRICAL
 Current rating: 15 Amps .
 Contact resistance: 30 mohms initial
 Insulation resistance: 1000000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 3100 VAC / minute
 Operating temperature: -55° C TO +125° C

Part no. A05 A - 015 M T R 0 0 0 B
 1 2 3 4 5 6 7 8 9 10

- | | |
|--------------------------|----------------------|
| 1. SERIES NO. | 6. FUNCTION OPTION: |
| 2. TYPE: | R=RIGHT |
| A=Standard | 7. NO USE |
| 3. CONTACT NUMBER | 8. NO USE |
| 4. CONTACT TYPE: | 9. NO USE |
| M=Male | 10. INSULATOR COLOR: |
| 5. CONTACT AREA PLATING: | B=Greyish White |
| T=Tin | |

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

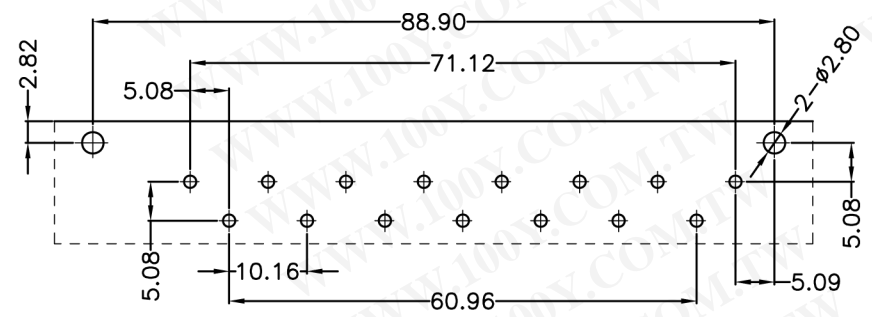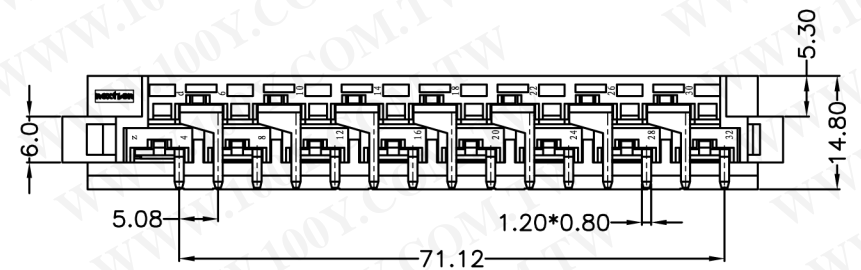

公差一览表		nextion®		CONNECTOR			
TOLERANCE UNLESS OTHERWISE		单位	制图	管正志	产品名称		
X.	±0.25	X°	±5°	mm	DRAWING	管正志	欧式大电流 15P 公座
.X	±0.20	.X°	±2°	角法	VIEW	管正志	产品料号
.XX	±0.15	.XX°	±1°	比例	SCALE	1:1	A05A-015MTR00B
.XXX	±0.02	.XXX°	±0.5°	日期	DATE	2010. 04. 19	A05A-015MTR00B-AO
				版本	VER	A0	图号
				制图	DESIGN	设计	图号
				审核	CHECK	核准	图号
				APPD			图号