

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

TA8406P, TA8406F

DUAL POWER OPERATIONAL AMPLIFIER



The TA8406P, TA8406F are dual power operational amplifier.

It is intended for use especially DC MOTOR positioning system applications such as Arm Driver (for Audiodisk Players), head or voice coil motor drivers (for Floppy and Winchester Disk Drivers) and any other power driver applications.

FEATURES

- Built-in over current protector
- Few external parts are required.
- Output current up to 500mA (AVE.) and 1.0A (PEAK)
- Excellent crosstalk characteristics

BLOCK DIAGRAM

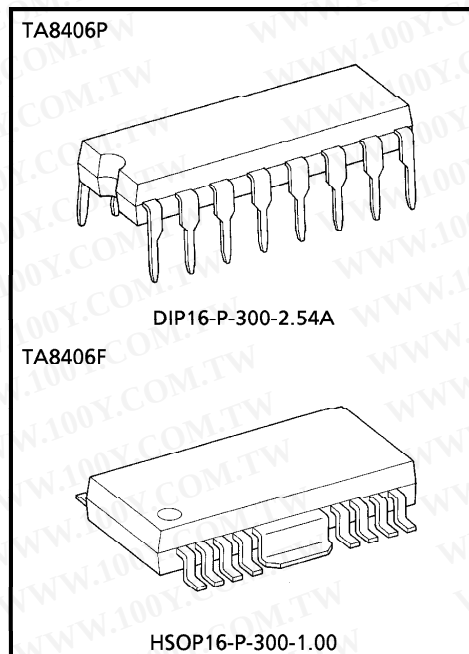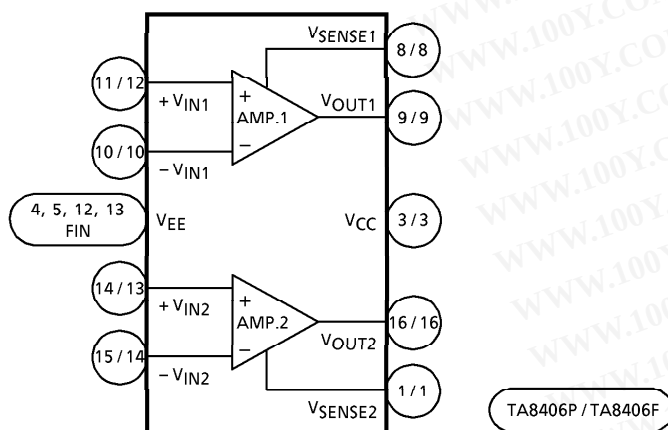

Weight

DIP16-P-300-2.54A : 1.11g (Typ.)
 HSOP16-P-300-1.00 : 0.50g (Typ.)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

961001EBA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PIN FUNCTION TA8406P

PIN No.	SYMBOL	FUNCTION DESCRIPTION
1	VSENSE2	AMP.2 output current detection terminal
2	NC	No connection
3	VCC	Positive side voltage terminal
4	VEE	Negative side voltage terminal
5	VEE	Negative side voltage terminal
6	NC	No connection
7	NC	No connection
8	VSENSE1	AMP.1 output current detection terminal
9	VOUT1	AMP.1 output terminal
10	-VIN1	AMP.1 negative input terminal
11	+VIN1	AMP.1 positive input terminal
12	VEE	Negative side voltage terminal
13	VEE	Negative side voltage terminal
14	+VIN2	AMP.2 positive input terminal
15	-VIN2	AMP.2 negative input terminal
16	VOUT2	AMP.2 output terminal

TA8406F

PIN No.	SYMBOL	FUNCTION DESCRIPTION
1	VSENSE2	AMP.2 output current detection terminal
2	NC	No connection
3	VCC	Positive-side voltage terminal
4	NC	No connection
5	NC	No connection
6	NC	No connection
7	NC	No connection
8	VSENSE1	AMP.1 output current detection
9	VOUT1	AMP.1 output terminal
10	-VIN1	AMP.1 negative input terminal
11	NC	No connection
12	+VIN1	AMP.1 positive input terminal
13	+VIN2	AMP.2 positive input terminal
14	-VIN2	AMP.2 negative input terminal
15	NC	No connection
16	VOUT2	AMP.2 output terminal
FIN	VEE	Negative side voltage terminal

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage		V _{CC} , V _{EE}	± 18	V
Output Current		I _O (AVE.)	0.5	A
Power Dissipation	TA8406P	P _D	(Note 1) 1.4	W
			(Note 2) 2.7	
	TA8406P		(Note 3) 1.4	
Operating Temperature		T _{opr}	- 30~75	°C
Storage Temperature		T _{stg}	- 55~150	°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

(Note 1) No heat sink



(Note 2) This value is obtained by 50×50×0.8mm PCB mounting occupied in excess of 60% of copper area.

(Note 3) This value is obtained by 60×30×1.6mm PCB mounting occupied in excess of 50% of copper area.


ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, V_{CC} = 15V, V_{EE} = - 15V, Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Quiescent Current		I _{CC}	—	—	—	10	20	mA
Input Off Set Current		I _{IO}	—	—	—	10	200	nA
Input Bias Current		I _I	—	—	—	100	700	nA
Input Off Set Voltage		V _{IO}	—	—	—	2	6	mV
Output Voltage Swing	Upper	V _{OH}	—	R _L = 33Ω	12	13.0	—	V
	Lower	V _{OL}			- 12	- 13.0	—	
Open Loop Gain		G _{VO}	—	—	—	100	—	dB
Input Common Mode Voltage Range		CMR	—	—	± 12	± 14	—	—
Common Mode Rejection Ratio		CMRR	—	—	70	90	—	dB
Supply Voltage Rejection Ratio		SVRR	—	—	—	50	150	μV/V
Band Width		f _T	—	Open loop	—	1.0	—	MHz
Slew Rate		SR	—	G _V = 0, R _L = 33Ω, R = 10Ω, C = 0.1μF	—	0.15	—	V/μs
Short Circuit Current		I _{SC}	—	R _{SC} = 2.2Ω	—	0.35	—	A
Cross Talk		CT	—	R _L = 33Ω, V _{OUT} = 1V _{p-p}	—	60	—	dB

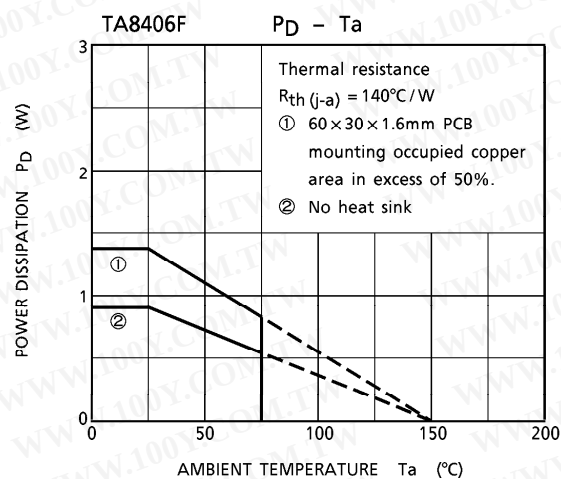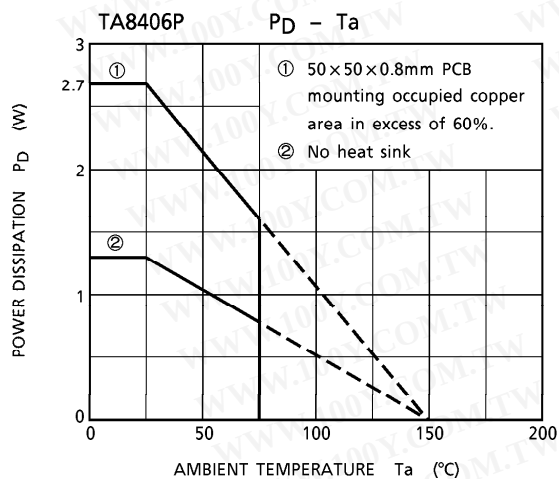


APPLICATION CIRCUIT 1

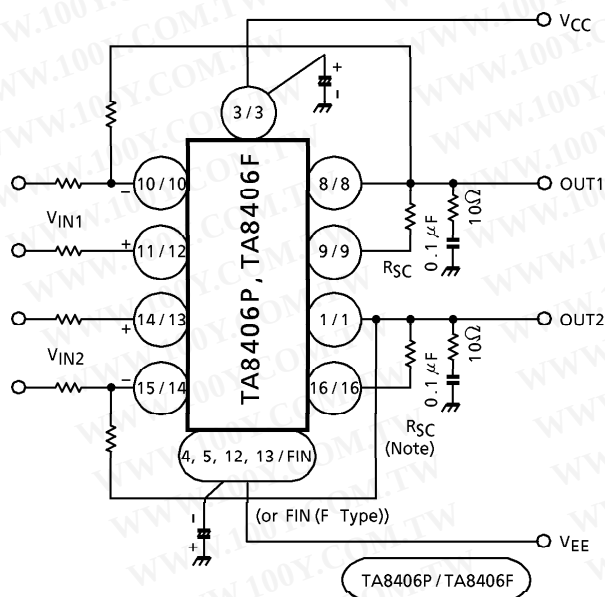

(Note) $I_{SC} \doteq \frac{0.77 \text{ (V)}}{R_{SC} \text{ (}\Omega\text{)}} \text{ (A)}$

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

APPLICATION CIRCUIT 2 (Compact disk player motor system)

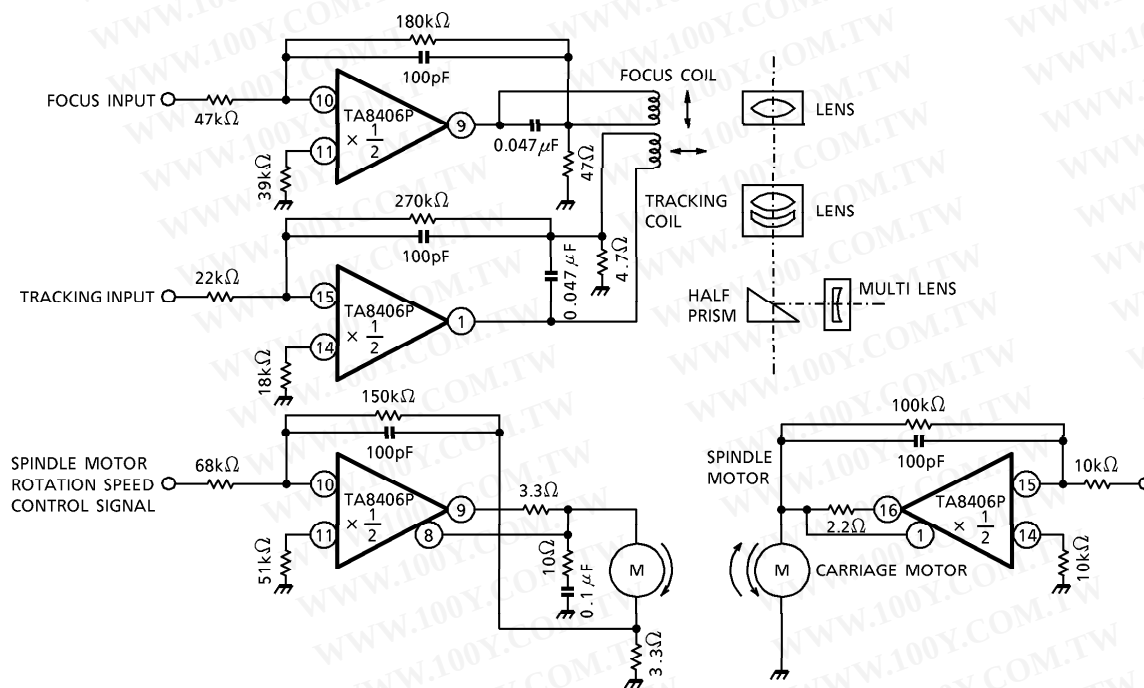


(Note) Utmost care is necessary in the design of the output line, V_{CC} , V_{EE} and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DIP16-P-300-2.54A

Unit : mm

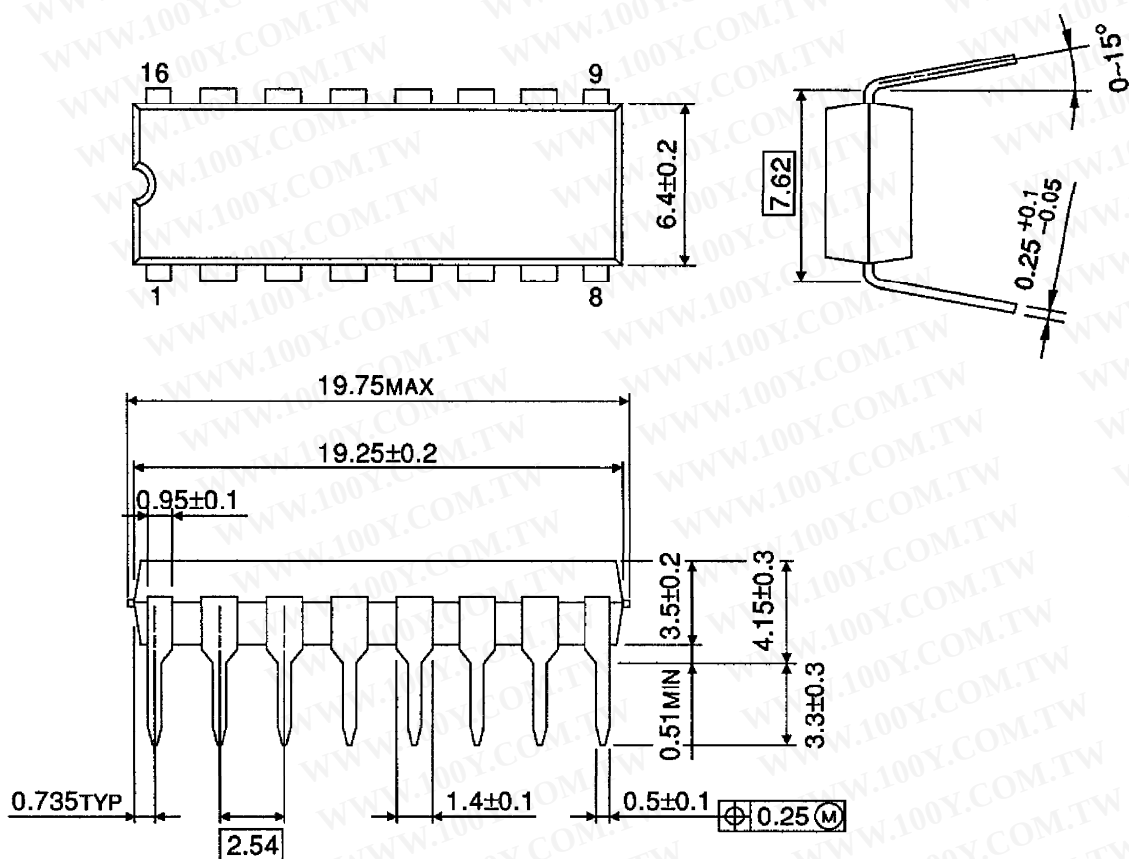


Weight : 1.11g (Typ.)

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

OUTLINE DRAWING

HSOP16-P-300-1.00

Unit : mm

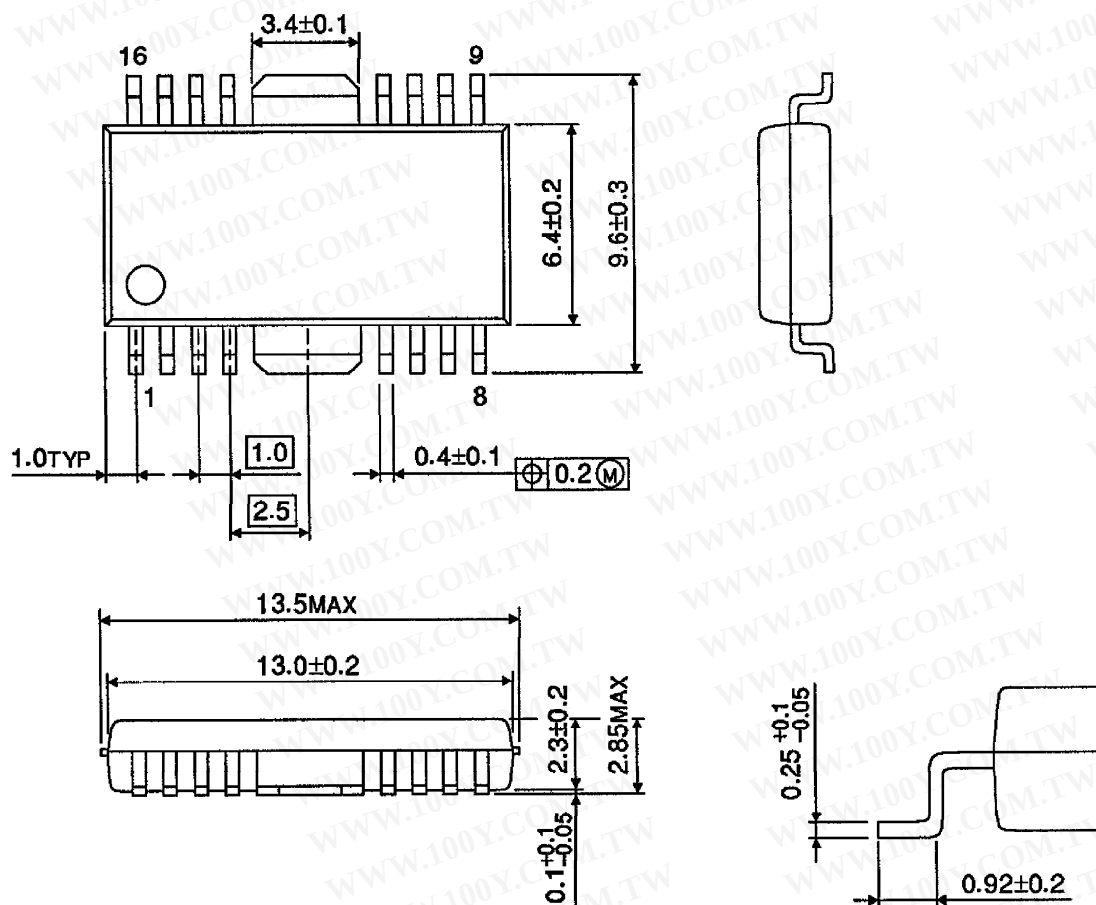

Weight : 0.50g (Typ.)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)