


TOSHIBA Infrared LED GaAs Infrared Emitter

TLN108(F)

Lead Free Product
 Opto-Electronic Switches
 Tape And Card Readers
 Equipment Using Infrared Transmission

- TO-18 metal package
- High radiant intensity: $I_E = 20 \text{ mW/sr}$ (typ.)
- Excellent radiant-intensity linearity. Modulation by pulse operation and high frequency is possible.
- Highly reliable due to hermetic seal

Unit: mm

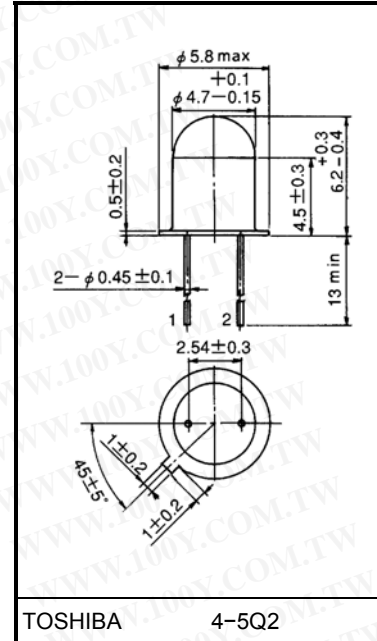

Weight: 0.33 g (typ.)

Maximum Ratings (Ta = 25°C)

Characteristic	Symbol	Rating	Unit
Forward current	I_F	100	mA
Forward current derating (Ta > 25°C)	$\Delta I_F / ^\circ\text{C}$	-1	mA / °C
Pulse forward current (Note)	I_{FP}	1	A
Reverse voltage	V_R	5	V
Operating temperature range	T_{opr}	-40~125	°C
Storage temperature range	T_{stg}	-55~150	°C


(Note): Pulse width $\leq 100\mu\text{s}$, repetitive frequency = 100 Hz

Pin Connection



1. Anode
2. Cathode (case)

Markings

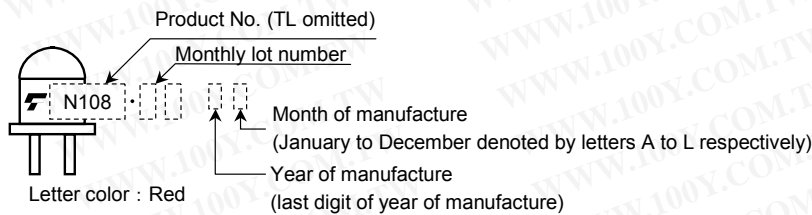

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Optical And Electrical Characteristics (Ta = 25°C)

Characteristic	Symbol	Test Condition	Min	Typ.	Max	Unit
Forward voltage	V _F	I _F = 50 mA	—	1.3	1.4	V
Pulse forward voltage	V _{FP}	I _{FP} = 1 A	—	2.4	—	V
Reverse current	I _R	V _R = 5 V	—	—	10	μA
Radiant intensity	I _E	I _F = 50 mA	10	20	—	mW / sr
Radiant power	P _O	I _F = 50 mA	—	3	—	mW
Capacitance	C _T	V _R = 0, f = 1 MHz	—	30	—	pF
Peak emission wavelength	λ _P	I _F = 50 mA	—	940	—	nm
Spectral line half width	Δλ	I _F = 50 mA	—	50	—	nm
Half value angle	θ _{1/2}	I _F = 50 mA	—	±8	—	°






Precautions

Please be careful of the followings.


- Soldering temperature: 260°C max
Soldering time: 5s max
(Soldering must be performed 1.5m from the bottom of the package.)
- When forming the leads, bend each lead under the 2mm from the body of the device.
Soldering must be performed after the leads have been formed.
- Radiant intensity falls over time due to the current which flows in the infrared LED.
When designing a circuit, take into account this change in radiant power over time.
The ratio of fluctuation in radiation intensity to fluctuation in optical output is 1 : 1.

$$\frac{I_E(t)}{I_E(0)} = \frac{P_O(t)}{P_O(0)}$$


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

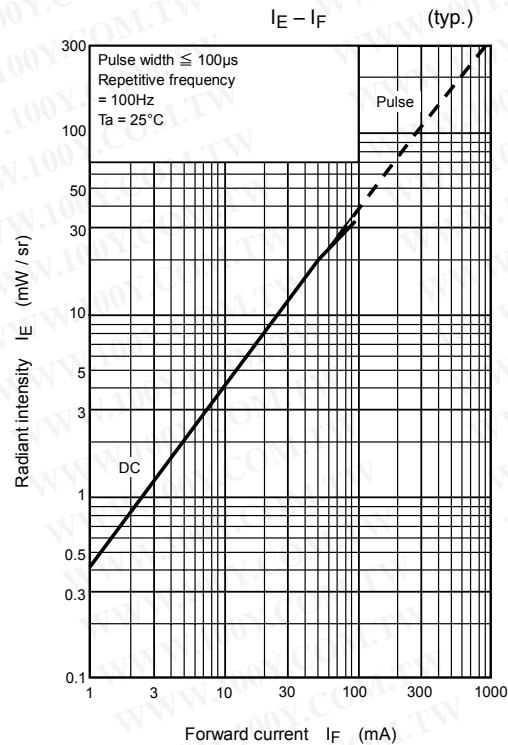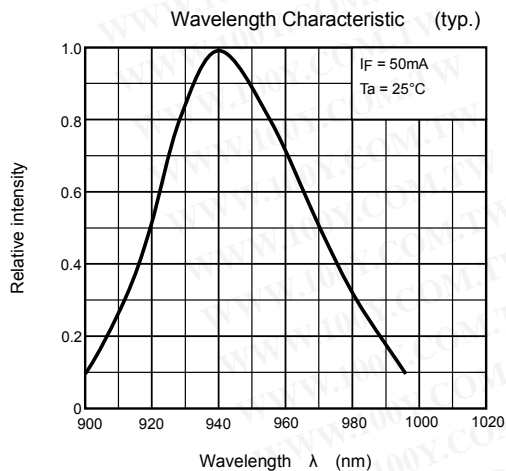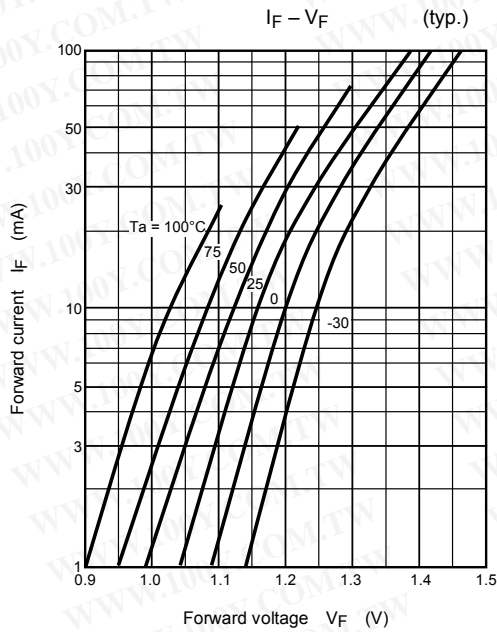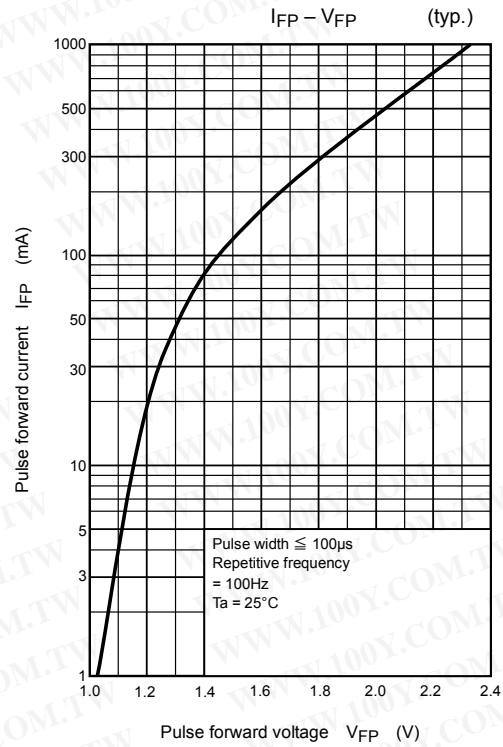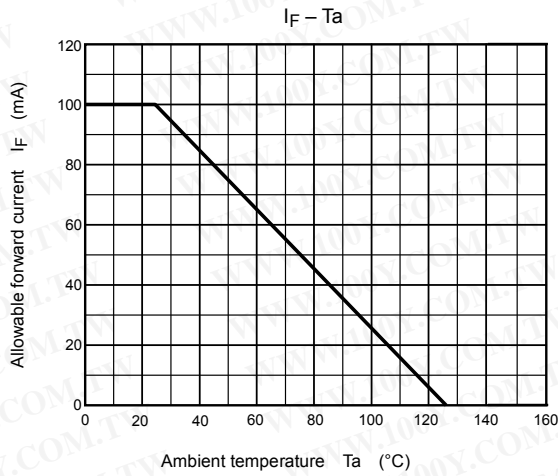


Radiation Pattern (typ.)
($T_a = 25^\circ\text{C}$)

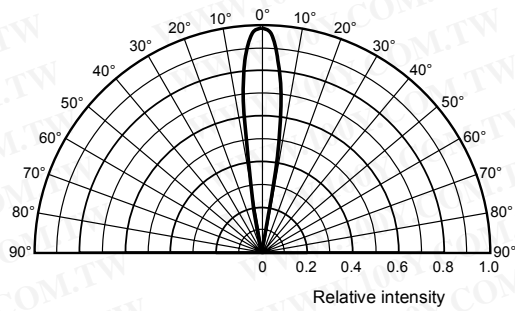


Relative $I_E - T_a$ (typ.)

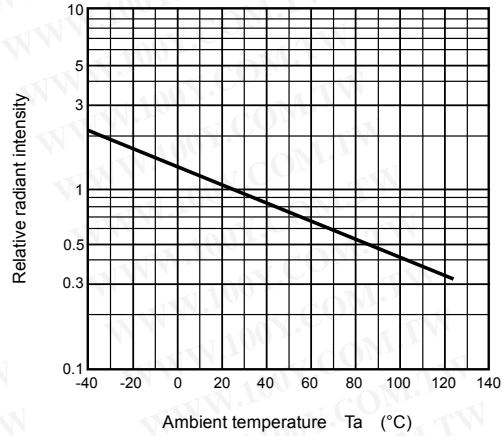

$I_{FP} - P_W$

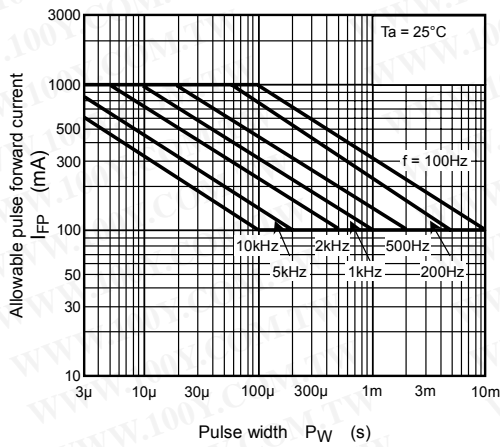

Coupling Characteristics With TPS601A(F)

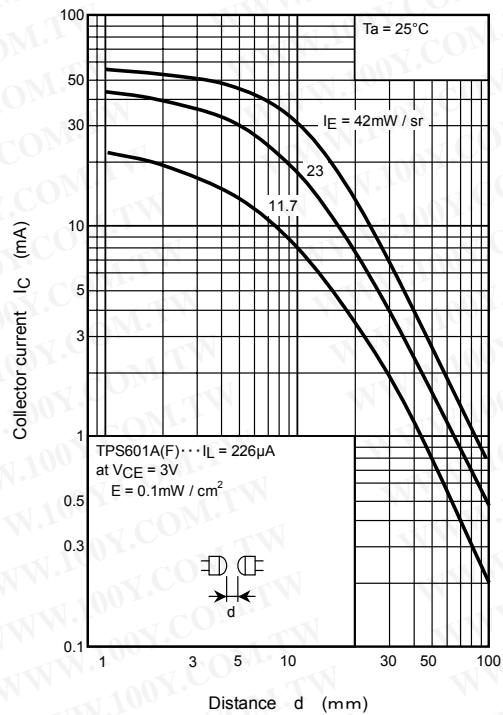

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

RESTRICTIONS ON PRODUCT USE

030619EAC

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.
- GaAs(Gallium Arsenide) is used in this product. The dust or vapor is harmful to the human body. Do not break, cut, crush or dissolve chemically.